
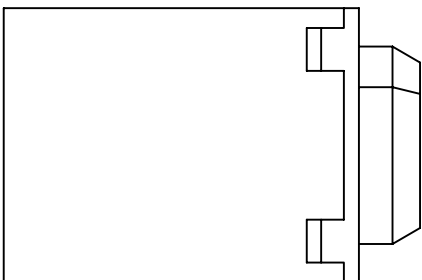
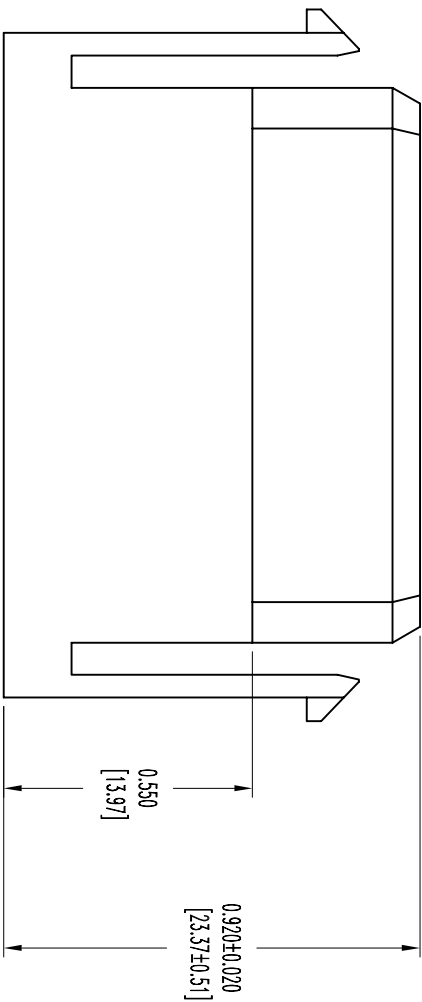


POSITRONIC INDUSTRIES RELEASES THE DATA ON THIS DRAWING TO BE REUSE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYING SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

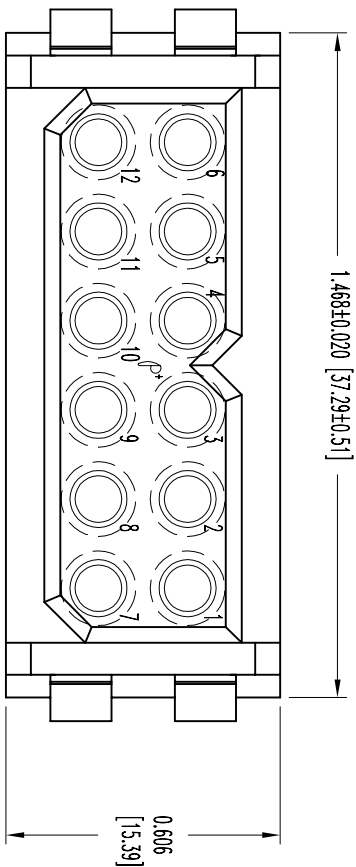

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3d, METHOD A.
 3. TEMPERATURE RANGE: -55°C TO +125°C.
 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE/REV	REVISION RECORD	APP	DR	CK
6-28-08	NC	ECO	21131	ME

SK5056



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL.	SCALE	DRAWN BY	REV.
± 0.015 [0.38]	N.T.S.	M. ENBA	NC

DATE	DRAWING NUMBER
6-26-03	SK5056

PCS SERIES	TITLE
	PLB12F7000