

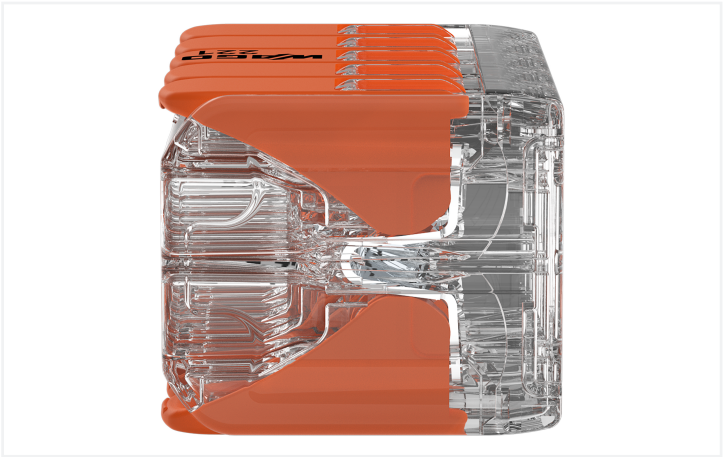
Data Sheet | Item Number: 221-420

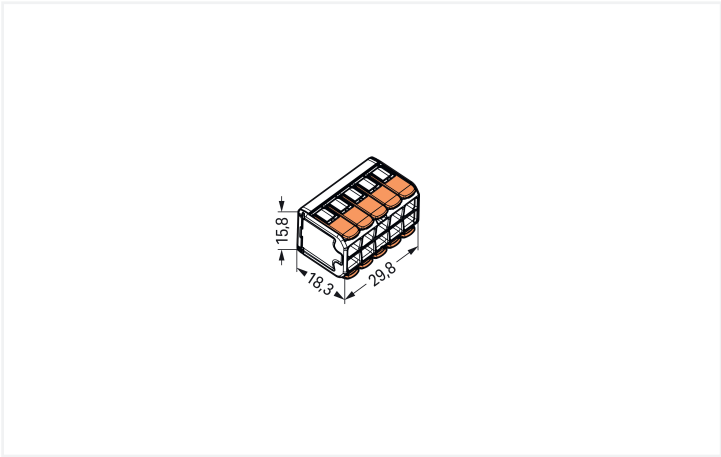
Splicing connector with levers; for all conductor types; max. 4 mm²; 10-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent

<https://www.wago.com/221-420>



Color: ☐ transparent





Dimensions in mm

Splicing connector with levers, 221 Series, lever

Enjoy effortless electrical installations with splicing connector with levers (item number 221-420). From wiring intercom systems to installing electrical ovens, connecting different conductor types is quick and hassle-free with WAGO's compact 221 Series splicing connector, which allows you to quickly and safely connect different types of conductors. Ensure that the strip lengths are 11 mm when connecting conductors to splicing connector with levers. Our splicing connector is rated for 450 V and is designed for use with a rated current of up to 32 A. It is therefore suitable for high-load applications. This product features conductor terminals and utilizes CAGE CLAMP®. Our proven universal connection known as CAGE CLAMP® is the industry standard for connection technology and electrical interconnections. Dimensions: (29.8 x 15.8 x 18.3) mm (width x height x depth). Splicing connector with levers is suitable for conductor cross sections ranging from 0.2 mm² to 4 mm².

WAGO's 221 Series Splicing Connector with levers impresses with its innovative design for different conductor cross-sections. That's why WAGO's lever-equipped splicing connector holds a unique trademark within electrical interconnection technology. The flat levers, which fit seamlessly into the 221's base, act like a cast when closed and can be positioned neatly in any housing without disturbing edges. Due to the wide design of each lever, they can all be operated perfectly without tools for convenient conductor terminations. The transparent housing displays robust technology and enables immediate visual inspection for the correct contact of solid, stranded and fine-stranded conductors. Resembling piano keys, the levers' design perfectly combines the functional and aesthetic connection technology "Made by WAGO." This product is designed for specific Ex applications (please refer to the product datasheet).

Notes	
General safety information	NOTICE: Observe installation and safety instructions! ▪ Only to be used by electricians! ▪ Do not work under voltage/load! ▪ Use only for proper use! ▪ Observe national regulations/standards/guidelines! ▪ Observe technical specifications for the products! ▪ Observe the number of permissible potentials! ▪ Do not use damaged/dirty components! ▪ Observe conductor types, cross-sections and strip lengths! ▪ Insert conductor until it hits the product's backstop! ▪ Use original accessories! To be sold only with installation instructions! in grounded power lines
Safety Information	

Electrical data			
Ratings per IEC/EN		Ratings per UL	
Ratings per	EN 60664	Approvals per	UL 486C
Nominal voltage (II/2)	450 V	Rated voltage UL (Use Group C)	600 V
Rated impulse withstand voltage (II/2)	4 kV	Rated current UL (Use Group C)	20 A
Rated current	32 A		
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2		



General information	
Wiring direction	Side-entry wiring

Connection Data																				
Clamping units	10	Connection 1 <table><tr><td>Connection technology</td><td>CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Lever</td></tr><tr><td>Connectable conductor materials</td><td>Copper</td></tr><tr><td>Nominal cross-section</td><td>4 mm² / 12 AWG</td></tr><tr><td>Solid conductor</td><td>0.2 ... 4 mm² / 24 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>0.2 ... 4 mm² / 24 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.14 ... 4 mm² / 24 ... 12 AWG</td></tr><tr><td>Strip length</td><td>11 mm / 0.43 inches</td></tr><tr><td>Wiring direction</td><td>Side-entry wiring</td></tr></table>	Connection technology	CAGE CLAMP®	Actuation type	Lever	Connectable conductor materials	Copper	Nominal cross-section	4 mm² / 12 AWG	Solid conductor	0.2 ... 4 mm² / 24 ... 12 AWG	Stranded conductor	0.2 ... 4 mm² / 24 ... 12 AWG	Fine-stranded conductor	0.14 ... 4 mm² / 24 ... 12 AWG	Strip length	11 mm / 0.43 inches	Wiring direction	Side-entry wiring
Connection technology	CAGE CLAMP®																			
Actuation type	Lever																			
Connectable conductor materials	Copper																			
Nominal cross-section	4 mm² / 12 AWG																			
Solid conductor	0.2 ... 4 mm² / 24 ... 12 AWG																			
Stranded conductor	0.2 ... 4 mm² / 24 ... 12 AWG																			
Fine-stranded conductor	0.14 ... 4 mm² / 24 ... 12 AWG																			
Strip length	11 mm / 0.43 inches																			
Wiring direction	Side-entry wiring																			
Total number of potentials	1																			

Physical data		
Width	29.8 mm / 1.173 inches	
Height	15.8 mm / 0.62 inches	
Depth	18.3 mm / 0.72 inches	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	transparent	
Cover color	transparent	
Material group	IIIa	
Insulation material (main housing)	Polycarbonate (PC)	
Flammability class per UL94	V2	
Fire load	0.132 MJ	
Actuator color	orange	
Weight	7 g	

Environmental requirements		
Ambient temperature (operation)	+85 °C	
Temperature marking per EN 60998	T85	

Commercial data		
PU (SPU)	150 (15) pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4066966611663	
Customs tariff number	85369010000	



Product Classification	
UNSPSC	39121409
ETIM 9.0	EC000446
ETIM 10.0	EC000446
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR NL-8062	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
cULus_Listed_667F Underwriters Laboratories Inc.	UL 486C	E69654			
ENEC 05 DEKRA Certification B.V.	IEC 60998	71-152248			
UL Underwriters Laboratories Inc.	UL 467	E201573			

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 221-420	

CAD/CAE-Data

CAD data	
2D/3D Models 221-420	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Jumper

1.1.1.1 Jumper



Item No.: 221-941/000-006

Jumper; for conductor entry; 2-way; insulated; blue



Item No.: 221-942/000-006

Jumper; for conductor entry; 2-way; insulated; blue



Item No.: 221-941

Jumper; for conductor entry; 2-way; insulated; dark gray



Item No.: 221-942

Jumper; for conductor entry; 2-way; insulated; dark gray

1.1.2 Mounting adapter

1.1.2.1 Mounting accessories



Item No.: 221-539/000-004

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; black



Item No.: 221-539/000-006

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; blue



Item No.: 221-539/000-053

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; dark gray-yellow



Item No.: 221-539/1000-000

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; for Ex applications; light gray



Item No.: 221-539/000-005

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; red



Item No.: 221-539

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; white



Item No.: 221-549/000-004

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; black



Item No.: 221-549/000-006

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; blue



Item No.: 221-549/000-053

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; dark gray-yellow



Item No.: 221-549/1000-000

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; for Ex applications; light gray



Item No.: 221-549/000-005

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; red



Item No.: 221-549

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; white



Item No.: 221-509/000-004

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; black



Item No.: 221-509/000-006

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; blue



Item No.: 221-509/000-053

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; dark gray-yellow



Item No.: 221-509/000-005

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; red



Item No.: 221-509

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; white



Item No.: 221-519/000-006

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; blue



Item No.: 221-519/000-053

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; dark gray-yellow



Item No.: 221-519

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; white



Item No.: 221-529/000-006

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; blue



Item No.: 221-529/000-053

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; dark gray-yellow



Item No.: 221-529

Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; white



Item No.: 221-539/002-004

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; black



Item No.: 221-539/002-006

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; blue



Item No.: 221-539/002-053

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; dark gray-yellow



Item No.: 221-539/1002-000

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; for Ex applications; light gray



Item No.: 221-539/002-005

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; red



Item No.: 221-539/002-000

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; white



Item No.: 221-549/002-004

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; black



Item No.: 221-549/002-006

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; blue



Item No.: 221-549/002-053

Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; dark gray-yellow





1.1.2.1 Mounting accessories


 Item No.: 221-549/1002-000 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for DIN-35 rail; for Ex applications; light gray	 Item No.: 221-549/002-005 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for DIN-35 rail; red	 Item No.: 221-549/002-000 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for DIN-35 rail; white	 Item No.: 221-509/002-004 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for screw mounting; black
 Item No.: 221-509/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for screw mounting; blue	 Item No.: 221-509/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for screw mounting; dark gray-yellow	 Item No.: 221-509/002-005 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for screw mounting; red	 Item No.: 221-509/002-000 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for screw mounting; white
 Item No.: 221-519/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for side screw mounting; blue	 Item No.: 221-519/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for side screw mounting; dark gray-yellow	 Item No.: 221-519/002-000 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; for side screw mounting; white	 Item No.: 221-529/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; with snap-in mounting foot; blue
 Item No.: 221-529/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; with snap-in mounting foot; dark gray-yellow	 Item No.: 221-529/002-000 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm ² ; with snap-in mounting foot; white		

Installation Notes

Conductor termination

 Strip conductor to 11 mm (0.43 inch).	 Pull up an orange lever to open the clamp unit.	 Then insert the conductor and push the lever back down, flush with the connector housing.	 Compact, lever-operated splicing connectors: Tool-free connection of fine-stranded conductors from 0.14 ... 4 mm ² , as well as solid or stranded conductors from 0.2 ... 4 mm ² (24 ... 12 AWG). Safety: The lever's specially designed rest position reliably prevents accidental unclamping of a connected conductor. Application safety, for any type of conductor (solid, stranded, fine-stranded), is confirmed by approvals like ENEC or UL.
--	--	---	--

Application

 Wiring fine-stranded conductors in junction boxes.	 Custom low-voltage lighting system	 Lighting distribution in a ceiling canopy	 Pendant light connection in a suspended ceiling
---	---	---	--

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com