

## 3-1/2 Digit Analog-to-Digital Converter with BCD Outputs

### Features

- Accuracy:  $\pm 0.05\%$  of Reading  $\pm 1$  Count
- Two Voltage Ranges: 1.999V and 199.9 mV
- Up to 25 Conversions Per Second
- $Z_{IN} > 1000M$  Ohms
- Single Positive Voltage Reference
- Auto-Polarity and Auto-Zero
- Overrange and Underrange Signals Available
- Operates in Auto-Ranging Circuits
- Uses On-Chip System Clock or External Clock
- Wide Supply Range:  $\pm 4.5V$  to  $\pm 8V$

### Applications

- Portable Instruments
- Digital Voltmeters
- Digital Panel Meters
- Digital Scales
- Digital Thermometers
- Remote A/D Sensing Systems

### Description


The TC14433 is a low-power, high-performance, monolithic CMOS 3-1/2 digit A/D converter. The TC14433 combines both analog and digital circuits on a single IC, thus minimizing the number of external components.

This dual-slope A/D converter provides automatic polarity and zero correction with the addition of two external resistors and two capacitors. The full scale voltage range of this ratiometric IC extends from 199.9 mV to 1.999V. The TC14433 can operate over a wide range of power supply voltages, including batteries and standard 5-V supplies.

The TC14433A features improved performance over the industry standard TC14433. Rollover, which is the measurement of identical positive and negative signals, is specified to have the same reading within one count for the TC14433A. Power consumption of the TC14433A is typically 4 mW, approximately one-half that of the industry standard TC14433.


The TC14433/A is available in 24-Pin SOIC (TC14433 device only) and 28-Pin PLCC packages.

### Package Type

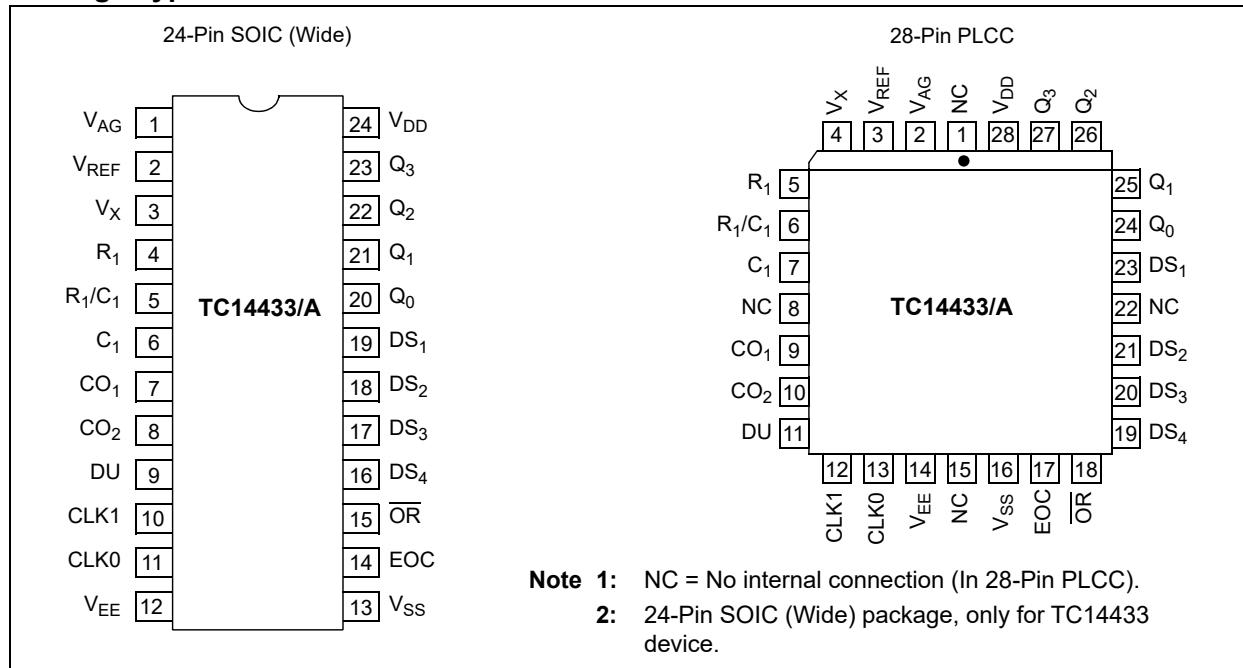

# TC14433/A

## Typical Application

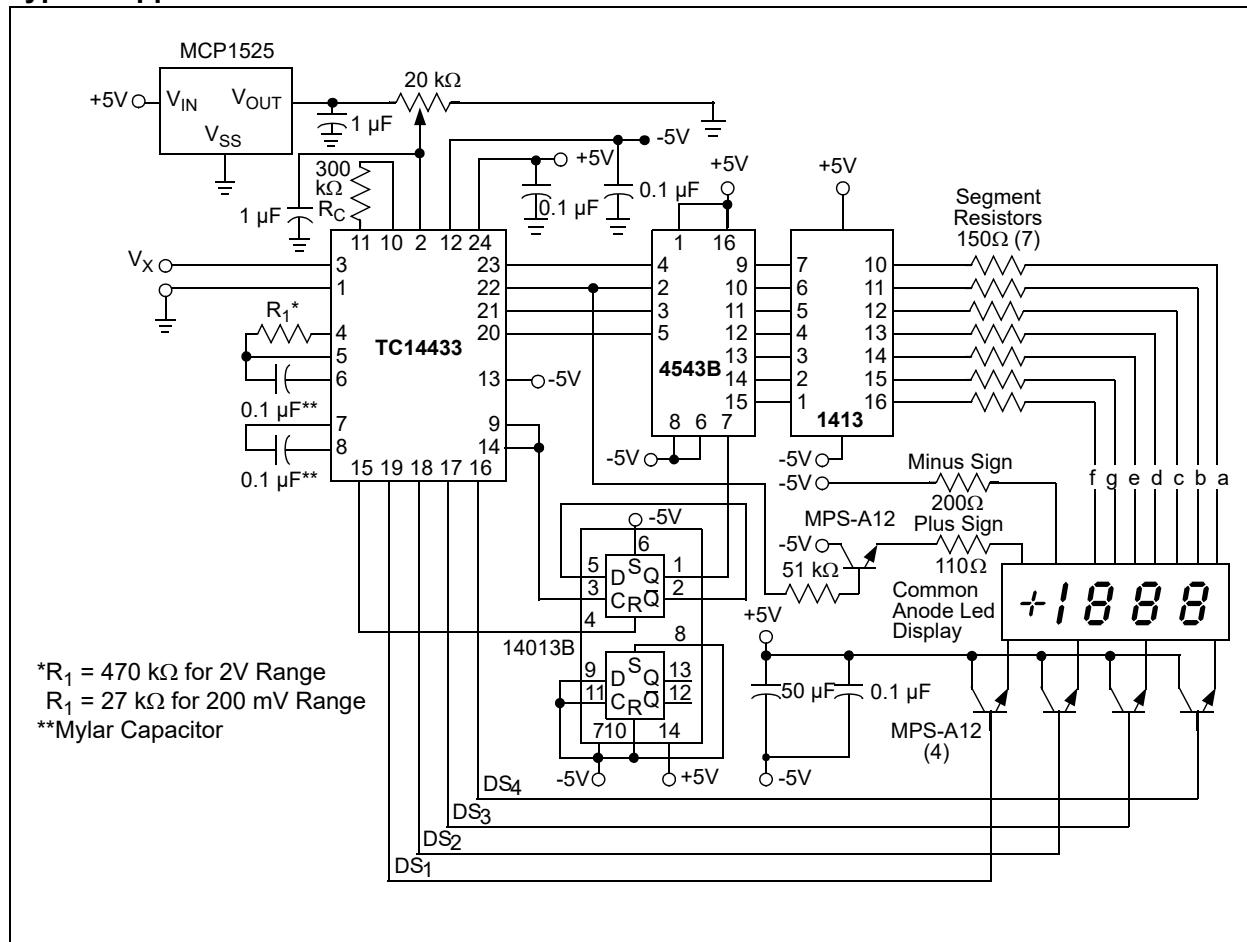

\* $R_1 = 470 \text{ k}\Omega$  for 2V Range  
 $R_1 = 27 \text{ k}\Omega$  for 200 mV Range  
\*\*Mylar Capacitor

\*\*Mylar Capacitor

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings†

Supply Voltage ( $V_{DD} - V_{EE}$ ) .....	-0.5V to +18V
Voltage on Any Pin:	
Reference to $V_{EE}$ .....	-0.5V to ( $V_{DD} + 0.5$ )
DC Current, Any Pin: .....	±10 mA
Power Dissipation ( $T_A \leq 70^\circ C$ ):	
Plastic PLCC .....	1.0W
SOIC .....	940 mW
Operating Temperature Range.....	-40°C to +85°C
Storage Temperature Range.....	-65°C to +160°C

† **Notice:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

## TC14433/A ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Temp. = +25°C			Temp. = -40°C to +85°C (except +25°C)				Test Conditions
		Min.	Typ.	Max.	Min.	Typ.	Max.	Units	
<b>Analog Input</b>									
Rollover Error (Positive) and Negative Full Scale Symmetry	SYE	-1	—	+1	—	—	—	Counts	200 mV Full Scale $V_{IN} - V_{IN} = +V_{IN}$
Linearity Output Reading <b>(Note 1)</b>	NL	-0.05	+0.05	+0.05	—	—	—	%rdg	$V_{REF} = 2V$
		-1	—	+1	—	—	—	counts	$V_{REF} = 200 \text{ mV}$
Stability Output Reading <b>(Note 2)</b>	SOR	—	—	2	—	—	—	LSD	$V_X = 1.99V$ , $V_{REF} = 2V$
		—	—	3	—	—	—	LSD	$V_X = 199 \text{ mV}$ , $V_{REF} = 200 \text{ mV}$
Zero Output Reading	ZOR	—	0	0	—	—	—	LSD	$V_X = 0V$ , $V_{REF} = 2V$
Bias Current: Analog Input Reference Input Analog Ground	$I_{IN}$	—	±20	±100	—	—	—	pA	
		—	±20	±100	—	—	—	pA	
		—	±20	±100	—	—	—	pA	
Common Mode Rejection	CMRR	—	65	—	—	—	—	dB	$V_X = 1.4V$ , $V_{REF} = 2V$ , $F_{OC} = 32 \text{ kHz}$
Output Voltage (Pins 14 to 23) <b>(Note 3)</b>	$V_{OL}$	—	0	0.05	—	—	0.05	V	$V_{SS} = 0V$ , "0" Level $V_{SS} = 5V$ , "0" Level
		—	-5	-4.95	—	—	—		
<b>Digital</b>									
Output Voltage (Pins 14 to 23) <b>(Note 3)</b>	$V_{OH}$	4.95	5	—	4.95	—	—	V	$V_{SS} = 0V$ , "1" Level $V_{SS} = 0.05$ , "1" Level
		4.95	5	—	4.95	—	—	V	
Output Current (Pins 14 to 23)	$I_{OH}$	-0.2	-0.36	—	-0.14	—	—	mA	$V_{SS} = 0V$ , $V_{OH} = 4.6V$ Source
		-0.5	-0.9	—	-0.35	—	—	mA	$V_{SS} = -5V$ , $V_{OH} = 5V$ Source

**Note 1:** Accuracy – The accuracy of the meter at full scale is the accuracy of the setting of the reference voltage. Zero is recalculated during each conversion cycle. The meaningful specification is linearity. In other words, the deviation from correct reading for all inputs other than positive full scale and zero is defined as the linearity specification.

**2:** The LSD stability for 200 mV scale is defined as the range that the LSD will occupy 95% of the time.

**3:** Pin numbers refer to 24-pin SOIC.

# TC14433/A

## TC14433/A ELECTRICAL SPECIFICATIONS (CONTINUED)

**Electrical Characteristics:** Unless otherwise specified,  $V_{DD} = +5V$ ,  $V_{EE} = -5V$ ,  $C_1 = 0.1 \mu F$ , (Mylar),  $C_0 = 0.1 \mu F$ ,  $R_C = 300 \text{ k}\Omega$ ,  $R_1 = 470 \text{ k}\Omega$  @  $V_{REF} = 2V$ ,  $R_1 = 27 \text{ k}\Omega$  @  $V_{REF} = 200 \text{ mV}$ ,  $T_A = +25^\circ\text{C}$ .

Parameter	Symbol	Temp. = +25°C			Temp. = -40°C to +85°C (except +25°C)				Test Conditions
		Min.	Typ.	Max.	Min.	Typ.	Max.	Units	
Output Current (Pins 14 to 23)	$I_{OL}$	0.51 1.3	0.88 2.25	— —	0.36 0.9	— —	— —	mA mA	$V_{SS} = 0V$ , $V_{OL} = 0.4V$ Sink $V_{SS} = -5V$ , $V_{OL} = -4.5V$ Sink
Clock Frequency		—	66	—	—	—	—	kHz	$R_C = 300 \text{ k}\Omega$
Input Current -DU	$I_{DU}$	—	$\pm 0.00$ 001	$\pm 0.3$	—	—	$\pm 1$	$\mu A$	
<b>Power</b>									
Quiescent Current: TC14433A	$I_Q$		— 0.4 1.4	— 2 4	— — —	— — —	— 3.7 7.4	mA mA	$V_{DD} = V_{EE}$ , $I_{SS} = 0$ $V_{DD} = 5$ , $V_{EE} = -5$ $V_{DD} = 8$ , $V_{EE} = -8$
Quiescent Current: TC14433		— — —	— 0.9 1.8	— 2 4	— — —	— — —	— 3.7 7.4	mA mA	$V_{DD} = V_{EE}$ , $I_{SS} = 0$ $V_{DD} = 5$ , $V_{EE} = -5$ $V_{DD} = 8$ , $V_{EE} = -8$
Supply Rejection	PSRR	—	0.5	—	—	—	—	mV/V	$V_{DD} = V_{EE}$ , $I_{SS} = 0$ , $V_{REF} = 2V$ , $V_{DD} = 5$ , $V_{EE} = -5$

**Note 1:** Accuracy – The accuracy of the meter at full scale is the accuracy of the setting of the reference voltage. Zero is recalculated during each conversion cycle. The meaningful specification is linearity. In other words, the deviation from correct reading for all inputs other than positive full scale and zero is defined as the linearity specification.

**2:** The LSD stability for 200 mV scale is defined as the range that the LSD will occupy 95% of the time.

**3:** Pin numbers refer to 24-pin SOIC.

## TEMPERATURE SPECIFICATIONS


Electrical Characteristics: Unless otherwise indicated, $V_{DD} = +5V$ and $V_{EE} = -5V$ .						
Parameters	Sym	Min	Typ	Max	Units	Conditions
<b>Temperature Ranges</b>						
Operating Temperature Range	$T_A$	-40	—	+85	°C	<b>Note</b>
Storage Temperature Range	$T_A$	-65	—	+150	°C	
<b>Thermal Package Resistances</b>						
Thermal Resistance, 24LD CERDIP	$\theta_{JA}$	—	N/A	—	°C/W	
Thermal Resistance, 24LD SOIC Wide	$\theta_{JA}$	—	70	—	°C/W	
Thermal Resistance, 28LD PLCC	$\theta_{JA}$	—	61.2	—	°C/W	

**Note:** The internal junction temperature ( $T_J$ ) must not exceed the absolute maximum specification of +150°C.


## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.


**Note:** Unless otherwise specified,  $V_{DD} = +5V$ ,  $V_{EE} = -5V$ ,  $C_1 = 0.1 \mu F$ , (Mylar),  $C_0 = 0.1 \mu F$ ,  $R_C = 300 k\Omega$ ,  $R_1 = 470 k\Omega$  @  $V_{REF} = 2V$ ,  $R_1 = 27 k\Omega$  @  $V_{REF} = 200 mV$ ,  $T_A = +25^\circ C$ .

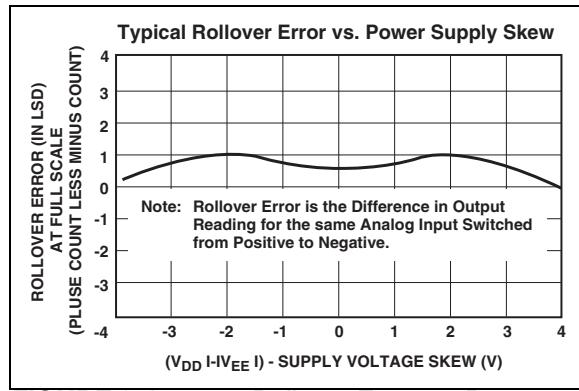


**FIGURE 2-1:** Rollover Error vs. Power Supply Skew.

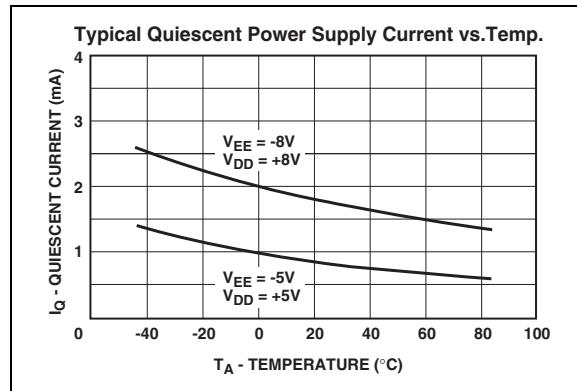


**FIGURE 2-4:** Quiescent Power Supply Current vs. Ambient Temperature.

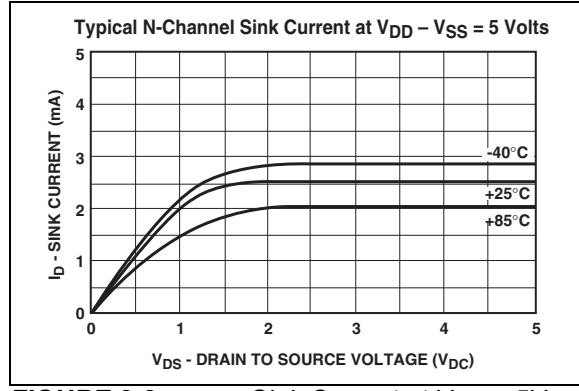


**FIGURE 2-2:** Sink Current at  $V_{DD} = 5V$ .

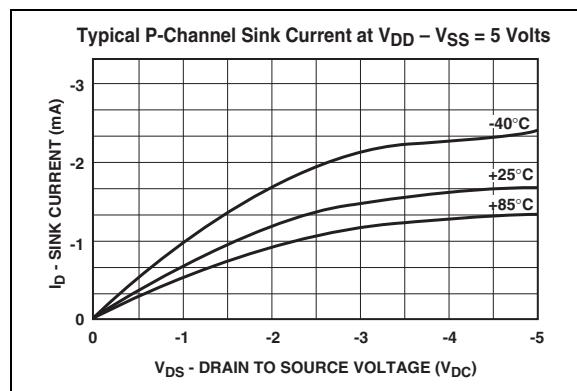

**FIGURE 2-5:** Sink Current at  $V_{DD} = 5V$ .

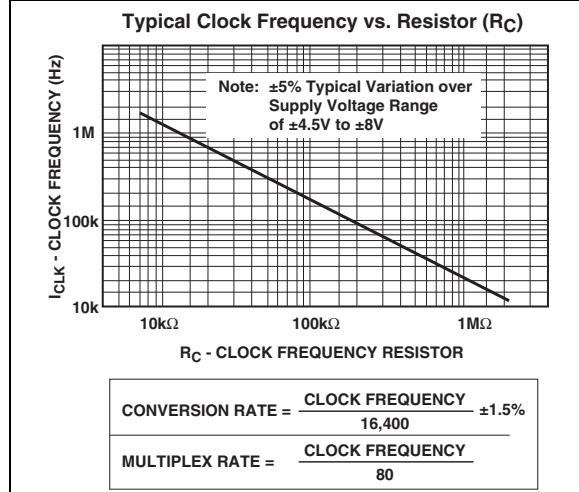

**FIGURE 2-3:** Clock Frequency vs. Resistor ( $R_C$ ).

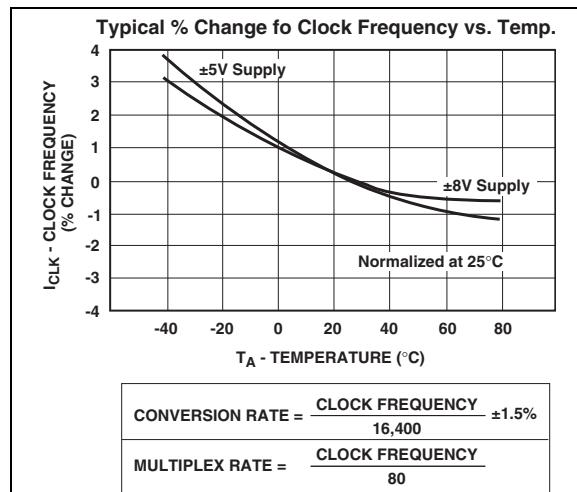

**FIGURE 2-6:** % Change to Clock Frequency vs. Ambient Temperature.

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

Pin No. 24-Pin SOIC	Pin No. 28-Pin PLCC	Symbol	Description
1	2	$V_{AG}$	This is the analog ground. It has a high input impedance. The pin determines the reference level for the unknown input voltage ( $V_X$ ) and the reference voltage ( $V_{REF}$ ).
2	3	$V_{REF}$	Reference voltage – Full scale output is equal to the voltage applied to $V_{REF}$ . Therefore, full scale voltage of 1.999V requires 2V reference and 199.9-mV full scale requires a 200-mV reference. $V_{REF}$ functions as system reset also. When switched to $V_{EE}$ , the system is reset to the beginning of the conversion cycle.
3	4	$V_X$	The unknown input voltage ( $V_X$ ) is measured as a ratio of the reference voltage ( $V_{REF}$ ) in a ratiometric A/D conversion.
4	5	$R_1$	This pin is for external components used for the integration function in the dual slope conversion. Typical values are 0.1 $\mu$ F (Mylar) capacitor for $C_1$ .
5	6	$R_1/C_1$	$R_1 = 470$ k $\Omega$ (resistor) for 2V full scale.
6	7	$C_1$	$R_1 = 27$ k $\Omega$ (resistor) for 200-mV full scale. Clock frequency of 66 kHz gives 250-ms conversion time.
7	9	$CO_1$	These pins are used for connecting the offset correction capacitor. The recommended value is 0.1 $\mu$ F.
8	10	$CO_2$	These pins are used for connecting the offset correction capacitor. The recommended value is 0.1 $\mu$ F.
9	11	DU	Display update input pin. When DU is connected to the EOC output, every conversion is displayed. New data will be strobed into the output latches during the conversion cycle if a positive edge is received on DU, prior to the ramp down cycle. When this pin is driven from an external source, the voltage should be referenced to $V_{SS}$ .
10	12	$CLK_1$	Clock input pins. The TC14433 has its own oscillator system clock. Connecting a single resistor between $CLK_1$ and $CLK_0$ sets the clock frequency.
11	13	$CLK_0$	A crystal or OC circuit may be inserted in lieu of a resistor for improved $CLK_1$ . The clock input can be driven from an external clock source, which needs to only have standard CMOS output drive. This pin is referenced to $V_{EE}$ for external clock inputs. A 300-k $\Omega$ resistor yields a clock frequency of about 66 kHz. See <b>Section 2.0 “Typical Performance Curves”</b> . (Also see <a href="#">Figure 5-3</a> for alternate circuits.)
12	14	$V_{EE}$	Negative power current. Connection pin for the most negative supply. Please note the current for the output drive circuit is returned through $V_{SS}$ . Typical supply current is 0.8 mA.
13	16	$V_{SS}$	Negative power supply for output circuitry. This pin sets the low voltage level for the output pins (BCD, Digit Selects, EOC, and OR). When connected to analog ground, the output voltage is from analog ground to $V_{DD}$ . If connected to $V_{EE}$ , the output swing is from $V_{EE}$ to $V_{DD}$ . The recommended operating range for $V_{SS}$ is between the $V_{DD}$ -3 volts and $V_{EE}$ .
14	17	EOC	End of conversion output generates a pulse at the end of each conversion cycle. This generated pulse width is equal to one half the period of the system clock.
15	18	OR	Overrange pin. Normally this pin is set high. When $V_X$ exceeds $V_{REF}$ , the OR is low.


**TABLE 3-1: PIN FUNCTION TABLE (CONTINUED)**

Pin No. 24-Pin SOIC	Pin No. 28-Pin PLCC	Symbol	Description
16	19	DS <sub>4</sub>	Digit select pin. The digit select output goes high when the respective digit is selected. The MSD (1/2-digit) turns on immediately after an EOC pulse.
17	20	DS <sub>3</sub>	The remaining digits turn on in sequence from MSD to LSD.
18	21	DS <sub>2</sub>	To ensure that the BCD data has settled, an inter-digit blanking time of two clock periods is included.
19	23	DS <sub>1</sub>	Clock frequency divided by 80 equals multiplex rate. For example, a system clock of 60 kHz gives a multiplex rate of 0.8 kHz.
20	24	Q <sub>0</sub>	See <a href="#">Figure 5-4</a> for digit select timing diagram.
21	25	Q <sub>1</sub>	BCD data output pin. Multiplexed BCD outputs contain three full digits of information during digit select DS <sub>2</sub> , DS <sub>3</sub> , and DS <sub>4</sub> .
22	26	Q <sub>2</sub>	During DS <sub>1</sub> , the 1/2 digit, overrange, underrange, and polarity information are available.
23	27	Q <sub>3</sub>	Refer to the Truth <a href="#">Table 5-1</a> .
24	28	V <sub>DD</sub>	Positive power supply. This is the most positive power supply pin.
—	1	NC	Not used.
—	8	NC	Not used.
—	15	NC	Not used.
—	22	NC	Not used.

## 4.0 DETAILED DESCRIPTION

The TC14433 CMOS IC becomes a modified dual-slope A/D with a minimum of external components. This IC has the customary CMOS digital logic circuitry, as well as CMOS analog circuitry. It provides the user with digital functions (such as counters, latches, and multiplexers) and analog functions (such as operational amplifiers and comparators) on a single chip. Refer to the functional block diagram in [Figure 4-3](#).

Features of the TC14433/A include auto-zero, high input impedances, and auto-polarity. Low power consumption and a wide range of power supply voltages are also advantages of this CMOS device. The system's auto-zero function compensates for the offset voltage of the internal amplifiers and comparators. In this "ratiometric system," the output reading is the ratio of the unknown voltage to the reference voltage, where a ratio of 1:1 is equal to the maximum count of 1999. It takes approximately 16,000 clock periods to complete one conversion cycle. Each conversion cycle may be divided into six segments. [Figure 4-1](#) shows the conversion cycle in six segments for both positive and negative inputs.

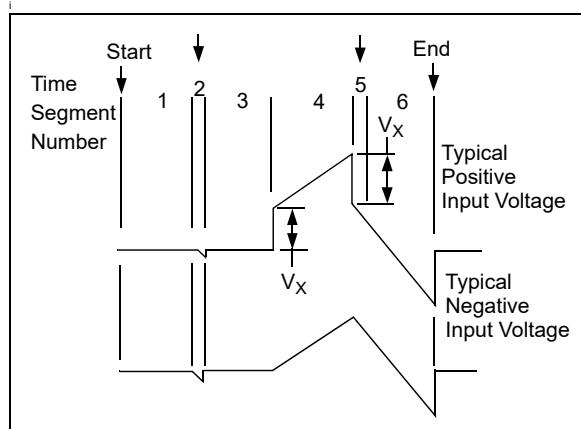


**FIGURE 4-1:** Integrator Waveforms at Pin 6.

**Segment 1** – The offset capacitor ( $C_O$ ), which compensates for the input offset voltages of the buffer and integrator amplifiers, is charged during this period. However, the integrator capacitor is shorted. This segment requires 4,000 clock periods.

**Segment 2** – During this segment, the integrator output decreases to the comparator threshold voltage. At this time, a number of counts equivalent to the input offset voltage of the comparator is stored in the offset latches for later use in the auto-zero process. The time for this segment is variable and less than 800 clock periods.

**Segment 3** – This segment of the conversion cycle is the same as Segment 1.


**Segment 4** – Segment 4 is an up-going ramp cycle with unknown input voltage ( $V_X$  as the input to the integrator). [Figure 4-2](#) shows the equivalent configuration of the analog section of the TC14433. The actual configuration of the analog section is dependent upon the polarity of the input voltage during the previous conversion cycle.

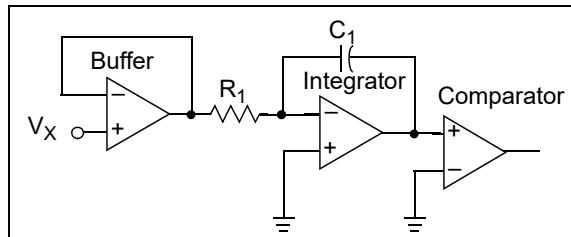

**FIGURE 4-2:** Equivalent Circuit Diagrams of the Analog Section During Segment 4 of the Timing Cycle.

**Segment 5** – This segment is a down-going ramp period with the reference voltage as the input to the integrator. Segment 5 of the conversion cycle has a time equal to the number of counts stored in the offset storage latches during Segment 2. As a result, the system zeros automatically.

**Segment 6** – This is an extension of Segment 5. The time period for this portion is 4,000 clock periods. The results of the A/D conversion cycle are determined in this portion of the conversion cycle.

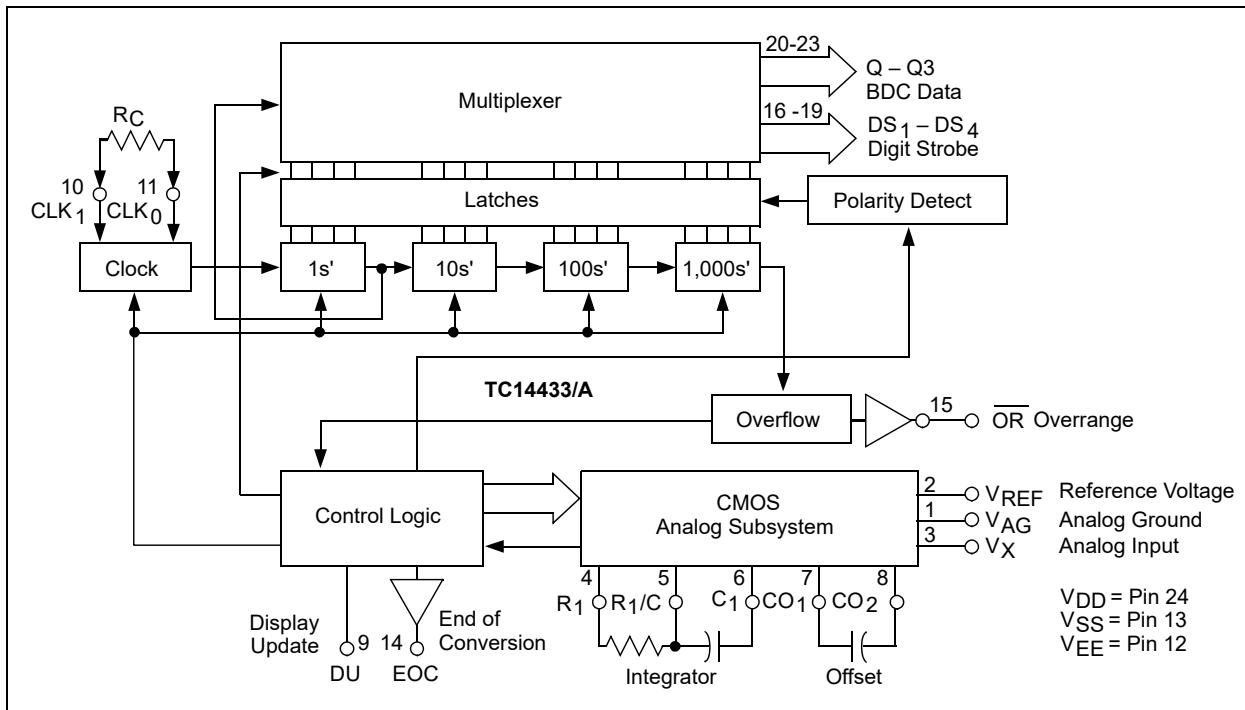

**FIGURE 4-3:** Functional Block Diagram.

# TC14433/A

## 5.0 TYPICAL APPLICATIONS

The typical application circuit is an example of a 3-1/2 digit voltmeter using the TC14433 with common-anode displays. This system requires a 2.5-V reference. Full scale may be adjusted to 1.999V or 199.9 mV. Input overrange is indicated by flashing a display. This display uses LEDs with common anode digit lines. Power supply for this system is shown as a dual  $\pm 5$ V supply; however, the TC14433 will operate over a wide voltage range.

The circuit in [Figure 5-1](#) shows a 3-1/2 digit LCD voltmeter. The 14024B provides the low frequency square wave signal drive to the LCD backplane. Dual power supplies are shown here; however, one supply may be used when  $V_{SS}$  is connected to  $V_{EE}$ . In this case,  $V_{AG}$  must be at least 2.8V above  $V_{EE}$ .

When only segments b and c of the decoder are connected to the 1/2 digit of the display, 4, 0, 7, and 3 appear as 1.

The overrange indication ( $Q_3 = 0$  and  $Q_0 = 1$ ) occurs when the count is greater than 1999; (for example, 1.999V for a reference of 2V) The underrange indication, useful for auto-ranging circuits, occurs when the count is less than 180; (for example, 0.180V for a reference of 2V).


**Note:** If the most significant digit is connected to a display other than a "1" only, such as a full digit display, segments other than b and c must be disconnected. The BCD to 7-segment decoder must blank on BCD inputs 1010 to 1111 (see [Table 5-1](#)).

TABLE 5-1: TRUTH TABLE

Coded Condition of MSD	Q <sub>3</sub>	Q <sub>2</sub>	Q <sub>1</sub>	Q <sub>0</sub>	BDC to 7-Segment Decoding	
+0	1	1	1	0	Blank	Blank
-0	1	0	1	0		
+0 UR	1	1	1	1		
-0 UR	1	0	1	1		
+1	0	1	0	0	4 - 1	Hook up only segments b and c to MSD
-1	0	0	0	0	0 - 1	
+1 OR	0	1	1	1	7 - 1	
-1 OR	0	0	1	1	3 - 1	


**Note 1:**  $Q_3$  – 1/2 digit, low for "1", high for "0".  
 $Q_2$  – Polarity: "1" = positive, "0" = negative.  
 $Q_0$  – Out of range condition exists if  $Q_0 = 1$ . When used in conjunction with  $Q_3$ , the type of out of range condition is indicated; that is,  $Q_3 = 0 \rightarrow$  OR or  $Q_3 = 1 \rightarrow$  UR.

[Figure 5-2](#) is an example of a 3-1/2 digit LED voltmeter with a minimum of external components (only 11 additional components). In this circuit, the 14511B provides the segment drive and the 75492 or 1413 provides the sink for digit current. Display is blanked during the overrange condition.

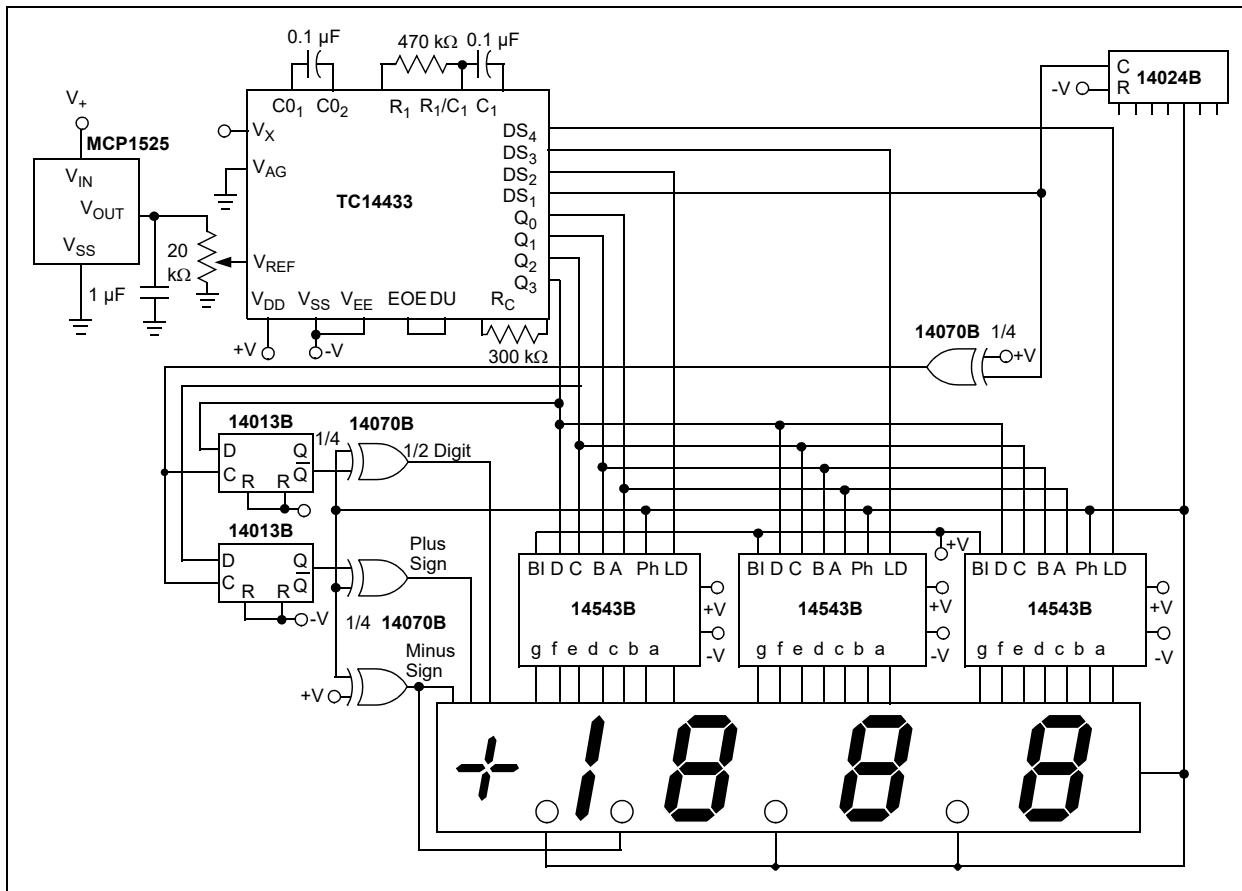


**FIGURE 5-1:** 3-1/2 Digit Voltmeter with LCD Display.


# TC14433/A

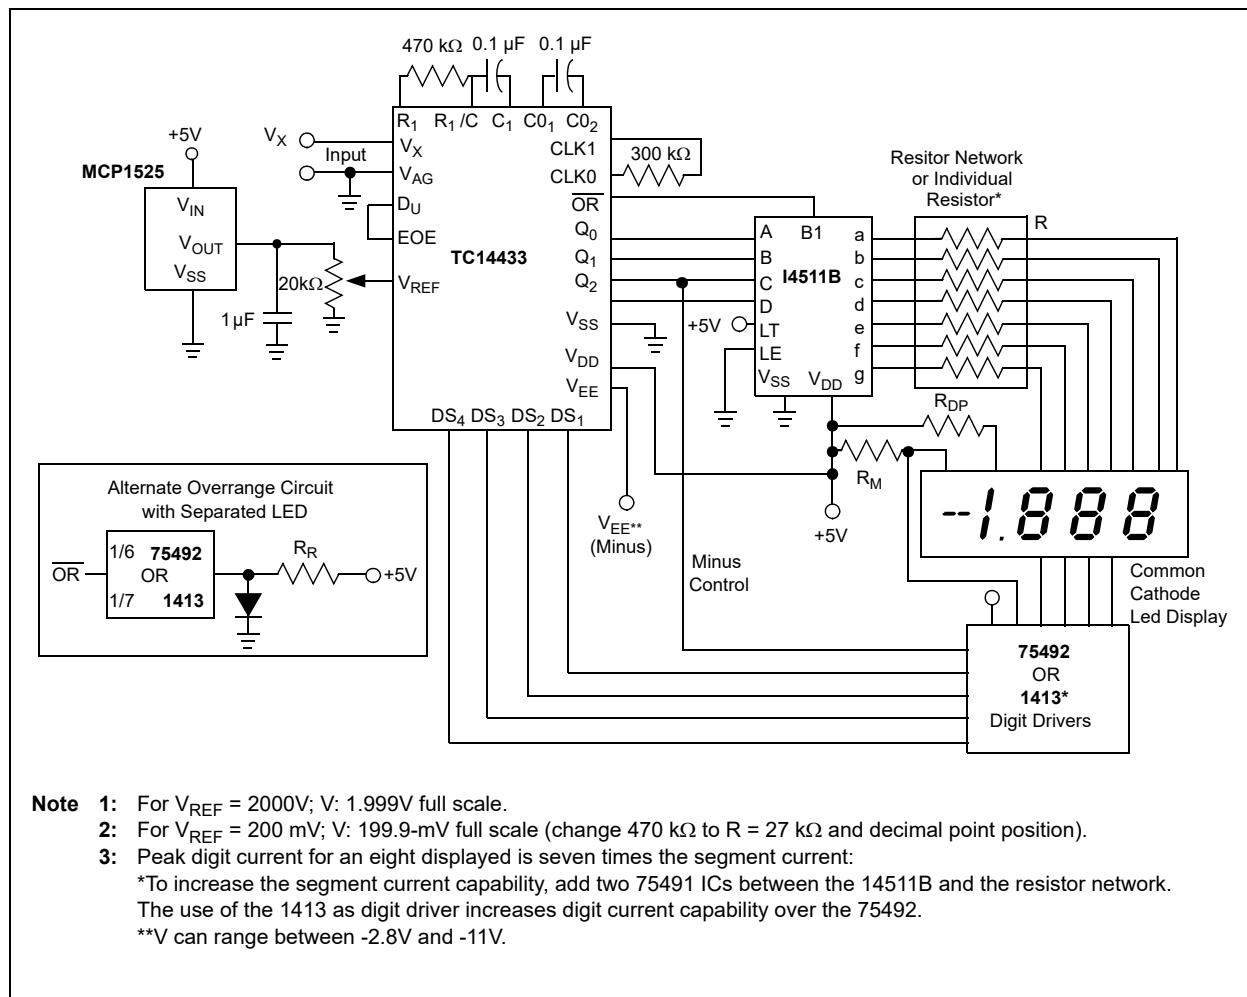

**FIGURE 5-2:** 3-1/2 Digit LED Voltmeter with Low Component Count Using Common Cathode Display.

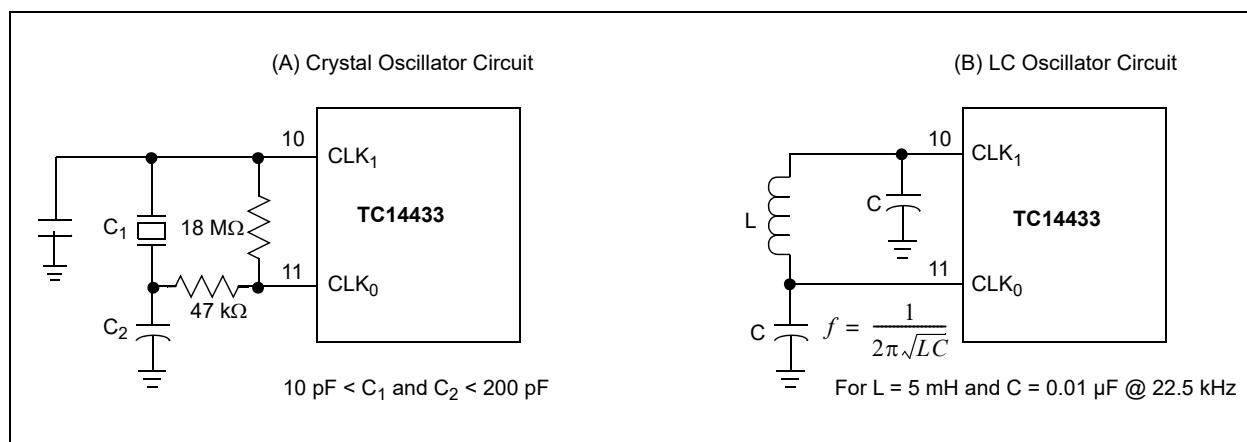

**FIGURE 5-3:** Alternate Oscillator Circuits.

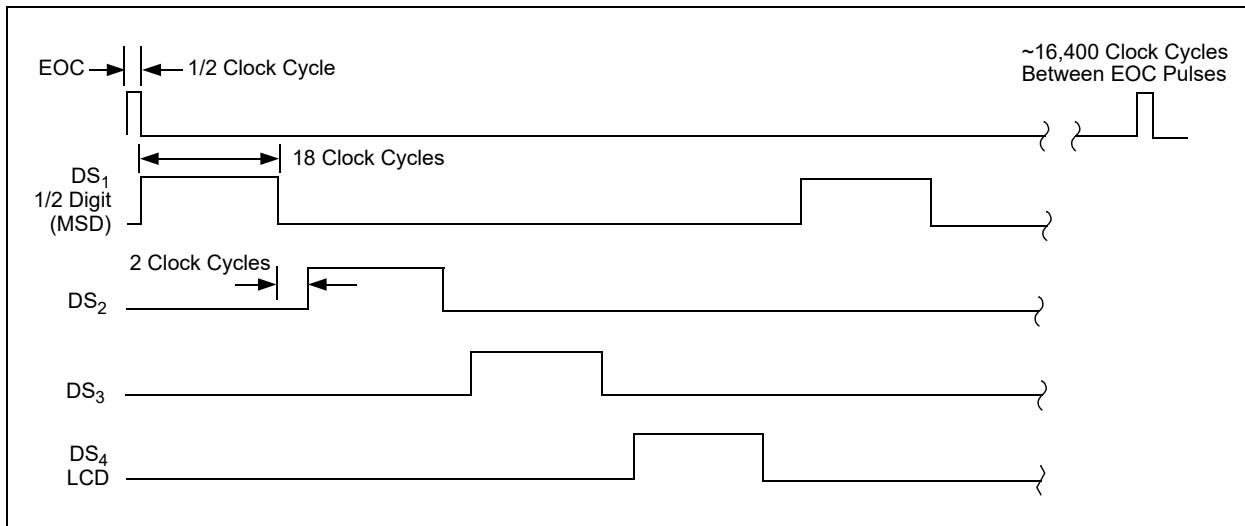


**FIGURE 5-4:** *Digit Select Timing Diagram.*

# TC14433/A


## 6.0 PACKAGING INFORMATION

### 6.1 Package Marking Information


24-Lead SOIC (7.50 mm)

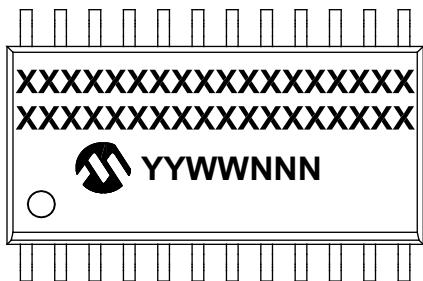


Example

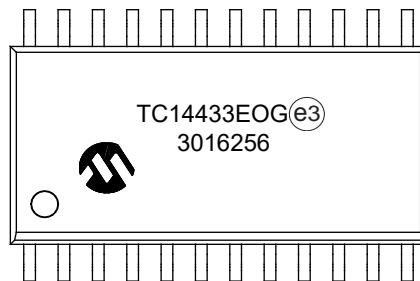

28-Lead PLCC

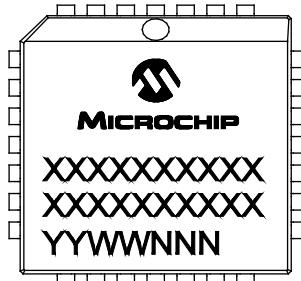

Example

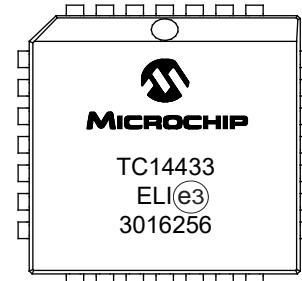


<b>Legend:</b>	XX...X	Customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC designator for Matte Tin (Sn)
*		This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package.


**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

## 24-Lead Plastic Small Outline (OG) - Wide, 7.50 mm Body [SOIC]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

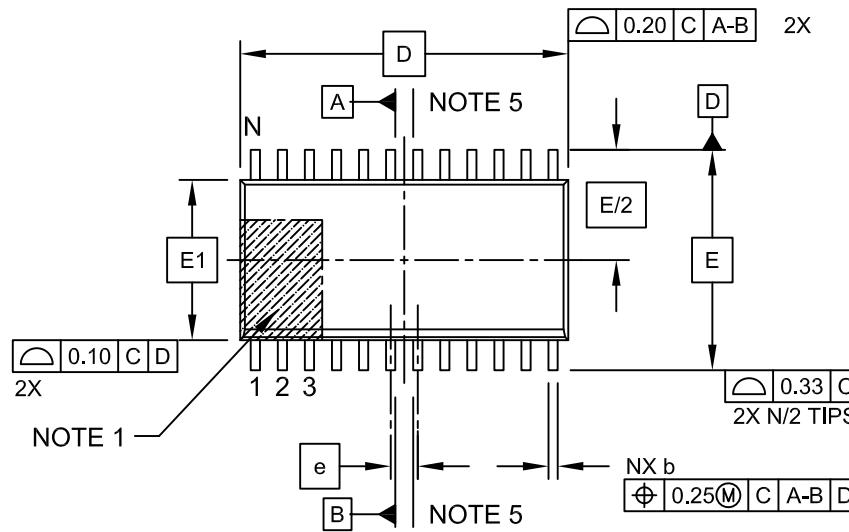

TOP VIEW

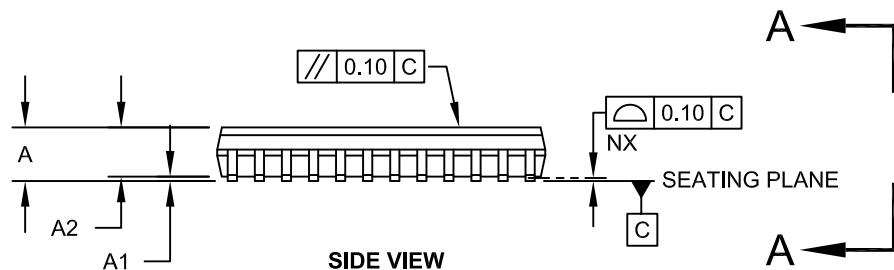

SIDE VIEW

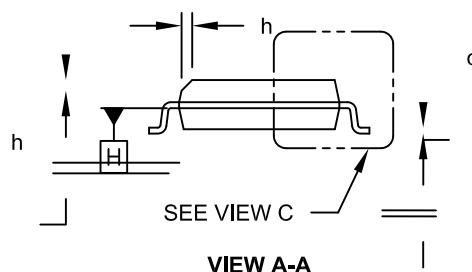


VIEW A-A

Microchip Technology Drawing C04-025C Sheet 1 of 2

# TC14433/A

## 24-Lead Plastic Small Outline (OG) - Wide, 7.50 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

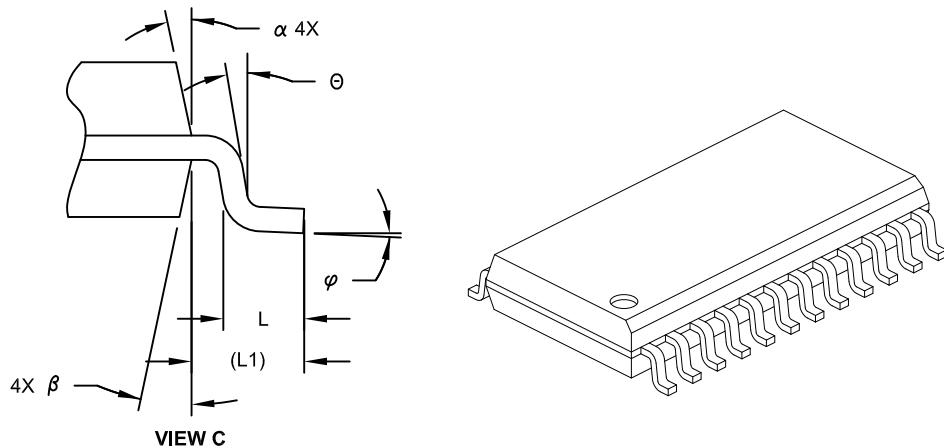

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins		N		
Pitch		e		
Overall Height		A		
Molded Package Thickness		A2		
Standoff		A1		
Overall Width		E		
Molded Package Width		E1		
Overall Length		D		
Chamfer (Optional)		h		
Foot Length		L		
Footprint		L1		
Lead Angle		θ		
Foot Angle		φ		
Lead Thickness		c		
Lead Width		b		
Mold Draft Angle Top		α		
Mold Draft Angle Bottom		β		

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimension D does not include mold flash, protrusions or gate burrs, which shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion, which shall not exceed 0.25 mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

5. Datums A & B to be determined at Datum H.

Microchip Technology Drawing No. C04-025C Sheet 2 of 2

## 24-Lead Plastic Small Outline (OG) – Wide, 7.50 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

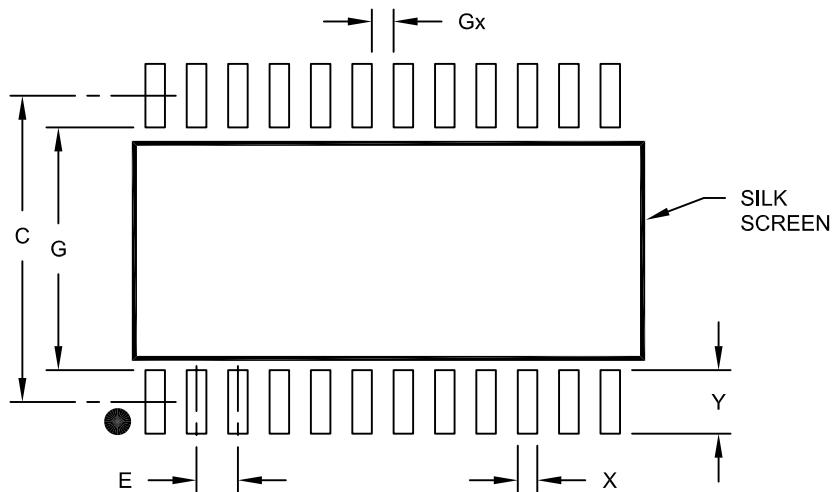

RECOMMENDED LAND PATTERN

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Contact Pitch	E		1.27	BSC	
Contact Pad Spacing	C		9.40		
Contact Pad Width (X24)	X			0.60	
Contact Pad Length (X24)	Y			2.00	
Distance Between Pads	Gx	0.67			
Distance Between Pads	G	7.40			

## Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2025A

# TC14433/A

## 28-Lead Plastic Leaded Chip Carrier (LI) – Square [PLCC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

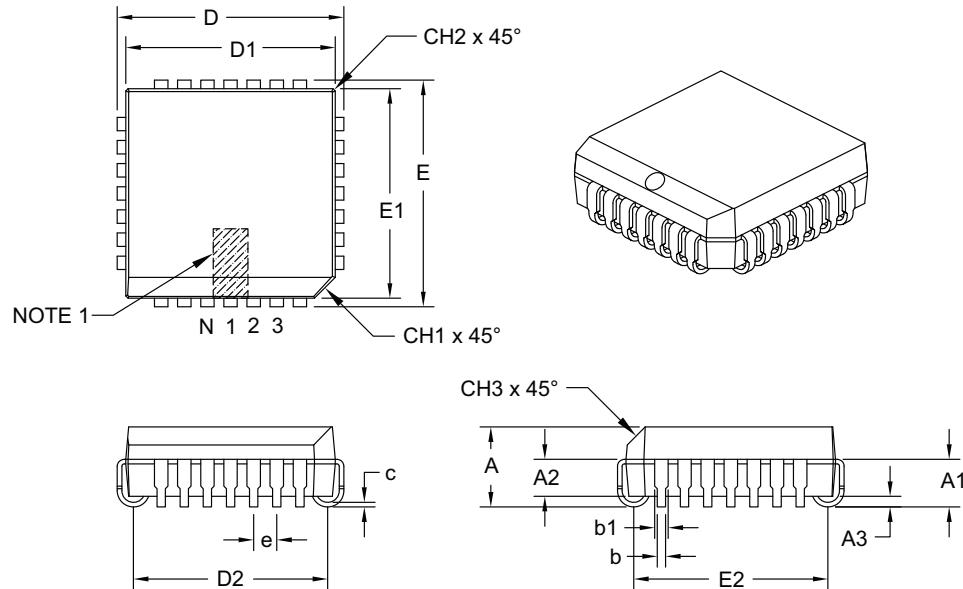

Dimension Limits		INCHES		
		MIN	NOM	MAX
Number of Pins	N		28	
Pitch	e		.050	
Overall Height	A	.165	.172	.180
Contact Height	A1	.090	.105	.120
Molded Package to Contact	A2	.062	—	.083
Standoff §	A3	.020	—	—
Corner Chamfer	CH1	.042	—	.048
Chamfers	CH2	—	—	.020
Side Chamfer	CH3	.042	—	.056
Overall Width	E	.485	.490	.495
Overall Length	D	.485	.490	.495
Molded Package Width	E1	.450	.453	.456
Molded Package Length	D1	.450	.453	.456
Footprint Width	E2	.382	.410	.438
Footprint Length	D2	.382	.410	.438
Lead Thickness	c	.0075	—	.0125
Upper Lead Width	b1	.026	—	.032
Lower Lead Width	b	.013	—	.021


### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic.
3. Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
4. Dimensioning and tolerancing per ASME Y14.5M.

Microchip Technology Drawing C04-026B

## 28-Lead Plastic Leaded Chip Carrier (L1) - Square [PLCC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

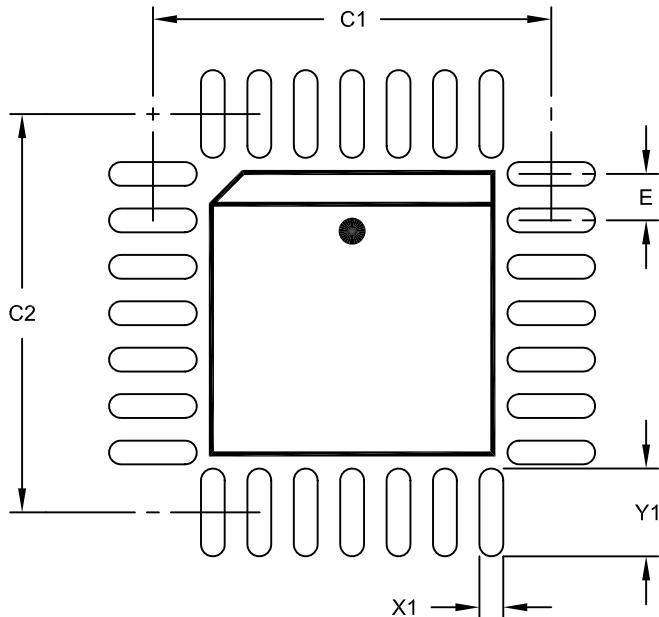

RECOMMENDED LAND PATTERN

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Contact Pitch	E		.050	BSC	
Contact Pad Spacing	C1			.429	
Contact Pad Spacing	C2			.429	
Contact Pad Width (X28)	X1				.026
Contact Pad Length (X28)	Y1				.094

## Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2026A

# TC14433/A

---

---

## NOTES:

## APPENDIX A: REVISION HISTORY

### Revision F (April 2018)

The following is the list of modifications:

1. Removed all 24-pin PDIP references as all PDIP packages have reached the end of life.
2. Updated existing device examples in the Product Identification System section.
3. Made minor text changes throughout.

### Revision E (August 2016)

The following is the list of modifications:

1. Updated the Temperature Range in the Product Identification System page.

### Revision D (July 2008)

The following is the list of modifications:

1. Changed Operating Temperature in Absolute Maximum Ratings to -40°C to +85°C.
2. Added Packaging Marking information.
3. Added Package Outline Drawings.
4. Added **Appendix A: “Revision History”**.
5. Added **“Product Identification System”**.

### Revision C (January 2006)

- Undocumented changes.

### Revision B (May 2002)

- Undocumented changes.

### Revision A (March 2001)

- Original release of this document.

# TC14433/A

---

---

## NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	X	/XX	[X] <sup>(1)</sup>	Examples:
Device				a) TC14433EOG: 24LD SOIC package
Temperature Range	X	/XX	[X] <sup>(1)</sup>	b) TC14433COG: 24LD SOIC package
				c) TC14433AELI: 28LD PLCC package
				d) TC14433ELI713: Tape and Reel, 28LD PLCC package
Device:	TC14433:	3 1/2 Digit, A/D Converter		e) TC14433AEOG: 24LD SOIC package
	TC14433A:	3 1/2 Digit, A/D Converter		
Tape and Reel Option:	Blank	= Standard packaging (tube or tray)		
	713	= Tape and Reel <sup>(1)</sup>		
Temperature Range:	E	= -40°C to +85°C		
	C	= -40°C to +70°C		
Package:	LI	= Plastic Leaded Chip Carrier, Square, 28-lead		
	OG	= Plastic Small Outline, Wide 7.50 mm, 24-lead		
				<b>Note 1:</b> Tape and Reel identifier appears only in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

# TC14433/A

---

---

## NOTES:

---

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. **MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE.** Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

## **QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO/TS 16949 =**

### **Trademarks**

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQL, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2001-2018, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-2853-4



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**

Tel: 512-257-3370

**Boston**

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**

Novi, MI  
Tel: 248-848-4000

**Houston, TX**

Tel: 281-894-5983

**Indianapolis**

Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**

Tel: 919-844-7510

**New York, NY**

Tel: 631-435-6000

**San Jose, CA**

Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**

Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733  
**China - Beijing**  
Tel: 86-10-8569-7000  
**China - Chengdu**  
Tel: 86-28-8665-5511  
**China - Chongqing**  
Tel: 86-23-8980-9588  
**China - Dongguan**  
Tel: 86-769-8702-9880  
**China - Guangzhou**  
Tel: 86-20-8755-8029  
**China - Hangzhou**  
Tel: 86-571-8792-8115  
**China - Hong Kong SAR**  
Tel: 852-2943-5100  
**China - Nanjing**  
Tel: 86-25-8473-2460  
**China - Qingdao**  
Tel: 86-532-8502-7355  
**China - Shanghai**  
Tel: 86-21-3326-8000  
**China - Shenyang**  
Tel: 86-24-2334-2829  
**China - Shenzhen**  
Tel: 86-755-8864-2200  
**China - Suzhou**  
Tel: 86-186-6233-1526  
**China - Wuhan**  
Tel: 86-27-5980-5300  
**China - Xian**  
Tel: 86-29-8833-7252  
**China - Xiamen**  
Tel: 86-592-2388138  
**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444  
**India - New Delhi**  
Tel: 91-11-4160-8631  
**India - Pune**  
Tel: 91-20-4121-0141  
**Japan - Osaka**  
Tel: 81-6-6152-7160  
**Japan - Tokyo**  
Tel: 81-3-6880- 3770  
**Korea - Daegu**  
Tel: 82-53-744-4301  
**Korea - Seoul**  
Tel: 82-2-554-7200  
**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906  
**Malaysia - Penang**  
Tel: 60-4-227-8870  
**Philippines - Manila**  
Tel: 63-2-634-9065  
**Singapore**  
Tel: 65-6334-8870  
**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366  
**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830  
**Taiwan - Taipei**  
Tel: 886-2-2508-8600  
**Thailand - Bangkok**  
Tel: 66-2-694-1351  
**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393  
**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829  
**Finland - Espoo**  
Tel: 358-9-4520-820  
**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79  
**Germany - Garching**  
Tel: 49-8931-9700  
**Germany - Haan**  
Tel: 49-2129-3766400  
**Germany - Heilbronn**  
Tel: 49-7131-67-3636  
**Germany - Karlsruhe**  
Tel: 49-721-625370  
**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44  
**Germany - Rosenheim**  
Tel: 49-8031-354-560  
**Israel - Ra'anana**  
Tel: 972-9-744-7705  
**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781  
**Italy - Padova**  
Tel: 39-049-7625286  
**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340  
**Norway - Trondheim**  
Tel: 47-7289-7561  
**Poland - Warsaw**  
Tel: 48-22-3325737  
**Romania - Bucharest**  
Tel: 40-21-407-87-50  
**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91  
**Sweden - Gothenberg**  
Tel: 46-31-704-60-40  
**Sweden - Stockholm**  
Tel: 46-8-5090-4654  
**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820