


FEATURES

- ULTRA SMALL PACKAGE
- AVAILABLE FROM 1.8 VDC TO 5.0 VDC
- ENABLE/DISABLE FUNCTION

SPECIFICATIONS

SERIES		COM2 (3.3 AND 5.0 Vcc) †	COM2 (3.3 Vcc AND BELOW) †
FREQUENCY RANGE†		1.544 MHz TO 156.000 MHz	2.500 MHz TO 55.000 MHz
FREQUENCY STABILITY††		±25 PPM, ±30 PPM, ±50 PPM, ±100 PPM	±10 PPM, ±15 PPM, ±20 PPM, ±25 PPM
OPERATING TEMPERATURE RANGE		-10°C TO +70°C (STANDARD)	-10°C TO +70°C (STANDARD)
		-40°C TO +85°C (EXTENDED)	-40°C TO +85°C (EXTENDED)
STORAGE TEMPERATURE RANGE		-55° C TO +125° C	-40°C TO +85°C
INPUT	VOLTAGE	+1.8 TO +5 VDC ± 10% †	+1.8 TO +3.3 VDC ± 10% †
	CURRENT (MAX)	1.544 MHz TO 9.99 MHz: 15 mA MAX 10.00 MHz TO 34.999 MHz: 20 mA MAX 35.00 MHz TO 49.999 MHz: 35 mA MAX 50.00 MHz TO 156.000 MHz: 40 mA MAX	7 mA MAX
OUTPUT	SYMMETRY	40% TO 60% AT 0.5*Vcc (NORMAL) 45% TO 55% AT 0.5*Vcc (TIGHT)	40% TO 60% AT 0.5*Vcc (NORMAL) 45% TO 55% AT 0.5*Vcc (TIGHT)
	RISE AND FALL TIME	10 ns MAX	5 ns MAX
	LOGIC "0" LEVEL	Vcc * 0.1 V MAX	Vcc * 0.1 V MAX
	LOGIC "1" LEVEL	Vcc * 0.9 V MIN	Vcc * 0.9 V MIN
	LOAD	CMOS 15 pF	CMOS 15 pF
ENABLE/DISABLE FUNCTION		PIN 1: HIGH OR OPEN PIN 3: OSCILLATION PIN 1: LOW PIN 3: HIGH IMPEDANCE	PIN 1: HIGH OR OPEN PIN 3: OSCILLATION PIN 1: LOW PIN 3: HIGH IMPEDANCE
ENABLE/DISABLE TIME		100 ns MAX	100 ns MAX
STANDBY CURRENT		100 µA MAX	10 µA MAX

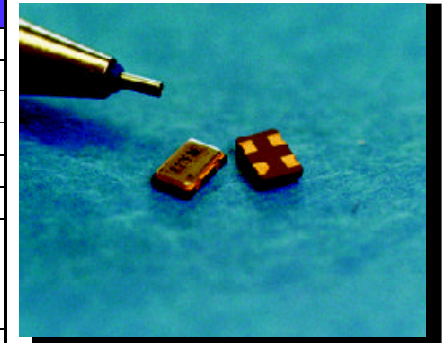


ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH-SVHC	COMPLIANT
RoHS	6/6
TERMINATION FINISH	Au


† NOT ALL COMBINATIONS OF FREQUENCY AND VOLTAGE ARE AVAILABLE, CONTACT SALES AT sales@raltron.com

†† INCLUSIVE OF 25°C TOLERANCE, OPERATING TEMPERATURE RANGE, VOLTAGE OR LOAD CHANGES, AGING, SHOCK AND VIBRATION


OUTLINE DRAWING

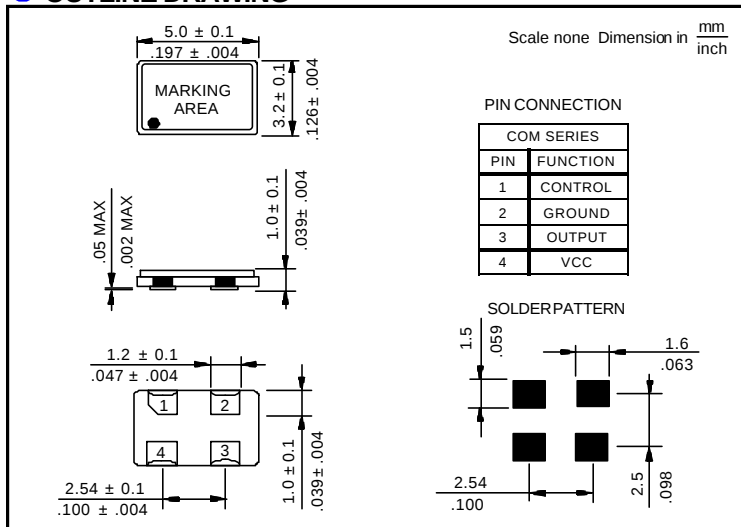

REFLOW SOLDERING PROFILE

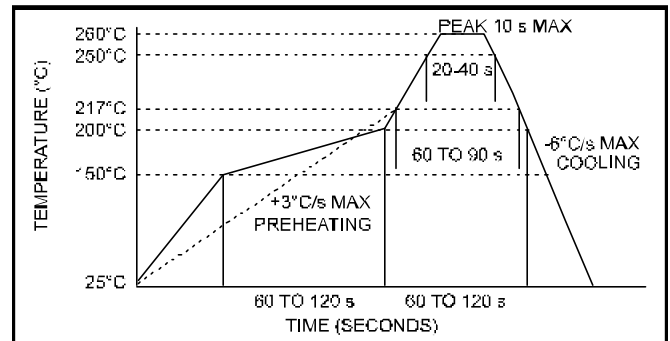

CARRIER TAPE DIMENSIONS

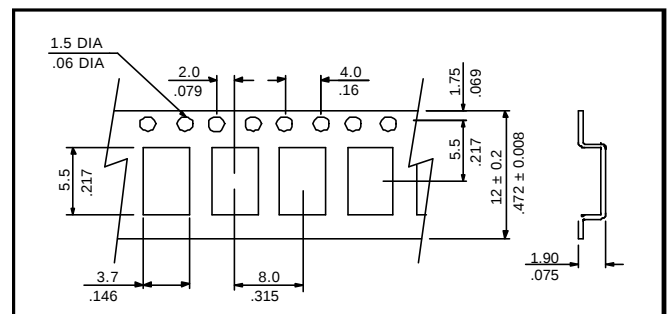

PACKAGING

178 mm REEL DIAMETER, 12mm TAPE WIDTH, 8mm PITCH
QUANTITY: 1000 PIECES PER REEL

PART NUMBERING SYSTEM

SERIES		INPUT VOLTAGE †			FREQUENCY STABILITY †			FREQUENCY		EXTENDED TEMPERATURE			TIGHT SYMMETRY			TAPE AND REEL
COM2	-	5 3 30 28 25 18	5.0 VDC 3.3 VDC 3.0 VDC 2.8 VDC 2.5 VDC 1.8 VDC		10 05 03 025 02 015 01	±100 PPM ±50 PPM ±30 PPM ±25 PPM ±20 PPM ±15 PPM ±10 PPM	-	IN MHz	-	EXT	EXTENDED (-40°C to +85°C)	-	T	TIGHT SYMMETRY (45-55%)	-	TR

EXAMPLE: COM2503-32.000-TR

Raltron Electronics 10400 NW 33rd Street Miami, Florida 33172 U.S.A.

Tel: 305-593-6033 Fax: 305-594-3973 e-mail: sales@raltron.com Internet: <http://www.raltron.com>