

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW82113T**M BZ-2RW82113T**

PAGE 1 OF 1

REPLACES

RELEASE NO. SR 11678

DRAWING
NUMBERISSUE
4

REVISIONS

A	CO-69351-D	JWB	15 JUL 91
B	CO-77589	TSM	29 MAR 94
C	CO93346	DLT	16 SEP 98

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

CHECK

15 JUL 94

REF

15 JUL 94

FORMTEK


FO-50378

DRAWN

L L D

13 JUL 64

CHECK

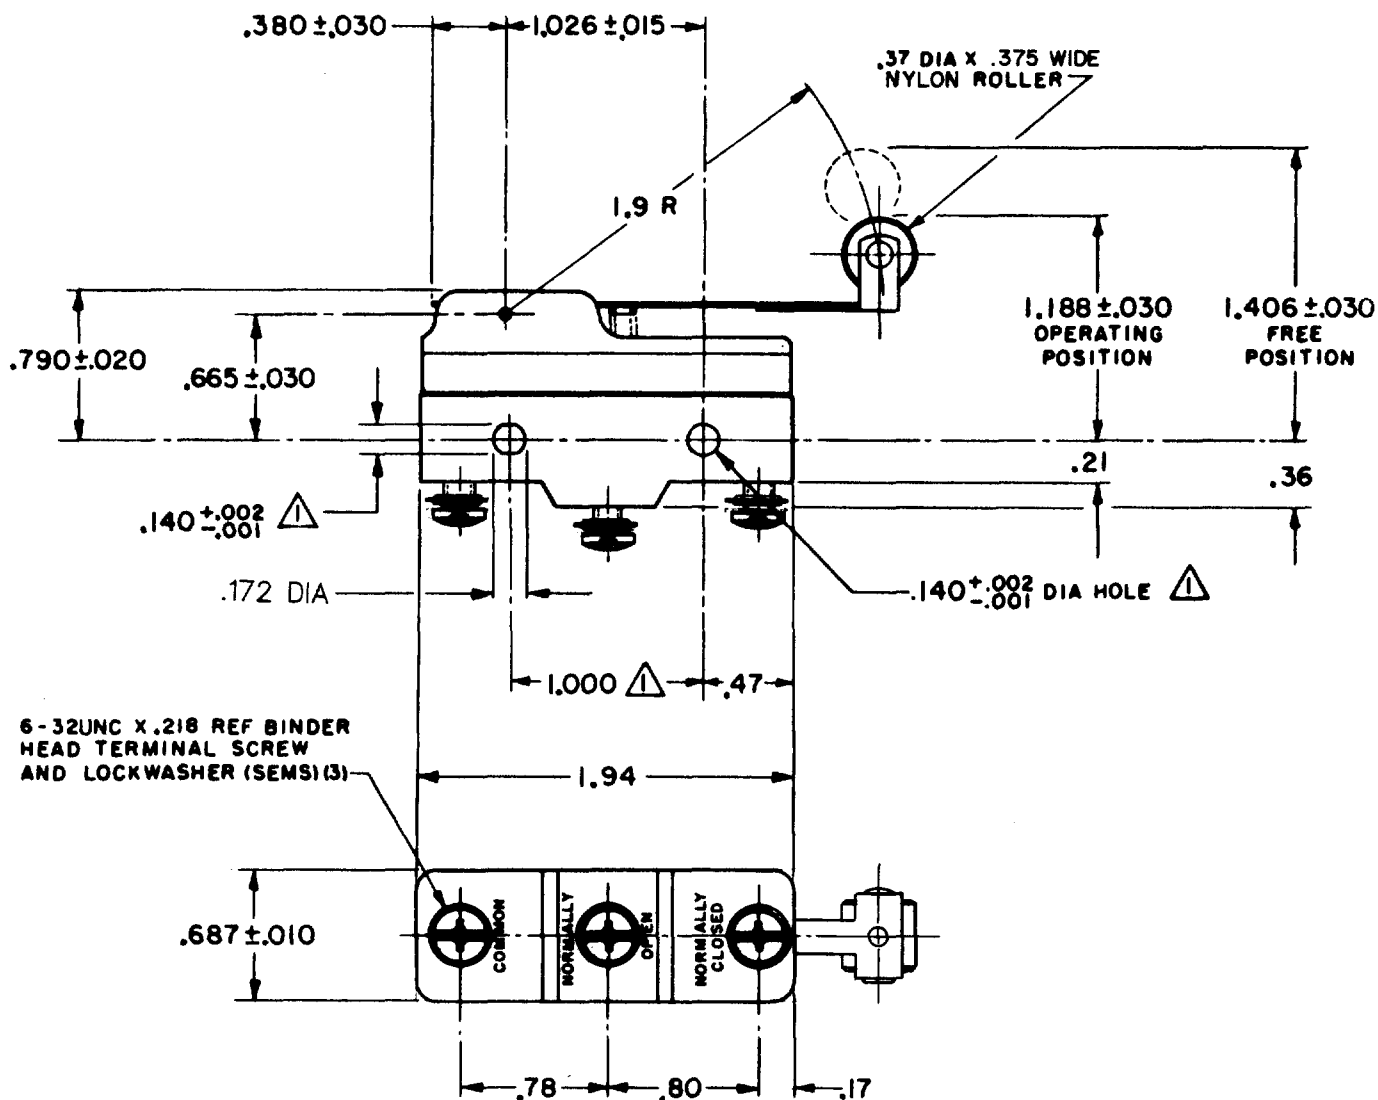

NOTE
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 3 1/2 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 3/4 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATINGS	UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL ----- .004-.040	-L96- 15A-125, 250, OR 480 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL ----- .124 MIN	1/2 A-125 VDC; 1/4 A-250 VDC	TOLERANCES ARE:
	1/8 HP-125 VAC; 1/4 HP-250 VAC	ONE PLACE (.0) $\pm .030$
	-L288-	TWO PLACE (.00) $\pm .015$
	-L299- 16A 250V $\sim$ T85 5E4	THREE PLACE (.000) $\pm .005$
	-L306-	ANGLES $\pm$
		WEIGHT .076 LB