

SK3951

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
10-4 01	NC	ECO 18383	RCW	JLG	COLE
5-18 04	A	ECO 22443		YK	

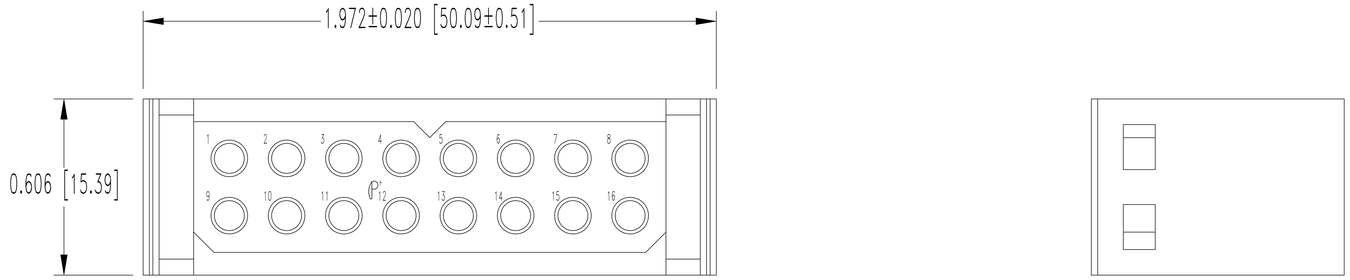

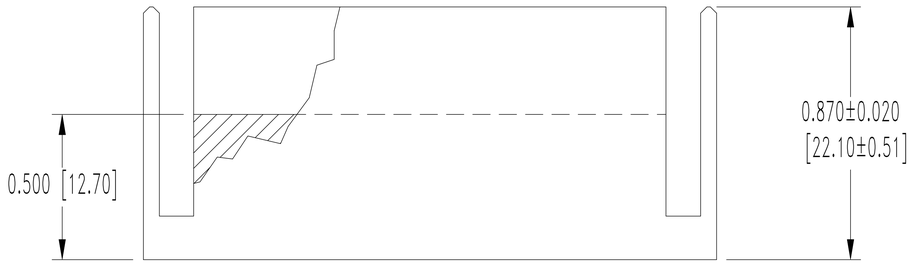

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR - GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
2. ELECTRICAL CHARACTERISTICS:
   INSULATOR RESISTANCE - 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
   WORKING VOLTAGE - 600 VAC.
3. TEMPERATURE RANGE -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ± 0.015 [0.38]	PCS SERIES	SCALE N.T.S.	DRAWN BY J. GREEN
			APPROVED BY RCW
ANGULAR TOL. ± 5°	TITLE PLB16M0000		
	DATE 10-4-01	DRAWING NUMBER SK3951	REV. A

Downloaded from Arrow.com.