
D2FS

Ultra Subminiature Basic Switch

Simple construction and high reliability for long time

- **Developed for a few number of operations during a long period of use such as door-detection to avoid sabotage on meters.**
- **Simple construction with a single-leaf movable spring realizes reasonable cost.**
- **Self-clinching, right-angled and left-angled PCB terminals are also available.**

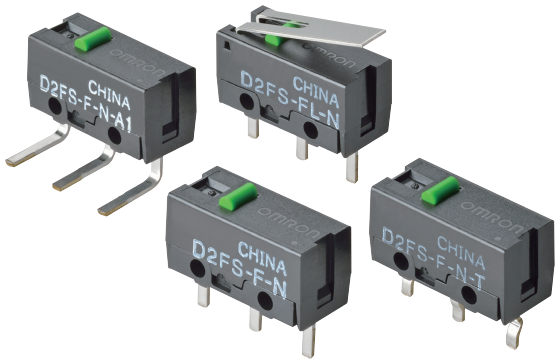

NEW

Model Number Legend

D2FS-F□-N□
(1) (2)

1. Actuator
None : Pin plunger
L : Hinge lever


2. Terminals
None : PCB terminals (Straight)
-T : PCB terminals (Self-clinching)
-A : PCB terminals (Right-angled)
-A1 : PCB terminals (Left-angled)

List of Models

Actuator	Terminals	Model
Pin plunger 	PCB terminals (Straight)	D2FS-F-N
	PCB terminals (Self-clinching)	D2FS-F-N-T
	PCB terminals (Right-angled)	D2FS-F-N-A
	PCB terminals (Left-angled)	D2FS-F-N-A1
Hinge lever 	PCB terminals (Straight)	D2FS-FL-N
	PCB terminals (Self-clinching)	D2FS-FL-N-T
	PCB terminals (Right-angled)	D2FS-FL-N-A
	PCB terminals (Left-angled)	D2FS-FL-N-A1

Contact Form

● **SPST-NO**



Contact Specifications

Contact	**Specification**	Crossbar
	Material	Silver
	Gap (standard value)	0.4 mm
Minimum applicable load (see note)		1 mA at 5 VDC

Note: For more information on the minimum applicable load, refer to *Using Micro Loads*.

Downloaded from Arrow.com.

Ratings

Rated voltage	Resistive load
6 VDC	0.1 A

Note: The rating values apply under the following test conditions.
Ambient temperature: 20 ± 2°C
Ambient humidity: 65 ± 5%
Operating frequency: 20 operations/min

Characteristics


Operating speed		Pin plunger models: 1 mm to 500 mm/s Lever models: 5 mm to 500 mm/s
Operatiing frequency	**Mechanical**	Pin plunger models: 200 operations/min max. Lever models: 100 operations/min max.
	Electrical	30 operations/min max.
Insulation resistance		100 MΩ min. (at 500 VDC)
Contact resistance (initial value)		100 mΩ max.
Dielectric strength	**Between terminals of same polarity**	600 VAC 50/60 Hz 1 min
	Between current carrying metal parts and ground	1,500 VAC 50/60 Hz 1 min
	Between each terminal and non-current carrying metal part	
Vibration resistance	**Malfunction *1**	10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	**Destruction**	1,000 m/s² max.
	Malfunction *1	300 m/s² max.
Durability *2	**Mechanical**	100,000 operations min. (at 30 ops./min.)
	Electrical	10,000 operations min. (at 30 ops./min.)
Degree of protection		IP40
Ambient operatingtamperature		–20 to +70°C (at 60%RH Max.) (with no icing or condensation)
Ambient operation humidity		85%RH max. (for +5 to +35°C)
Weight		Approx. 0.5 g (pin plunger models)

Note: The data given above are initial values.
***1.** The values are at Free Position and Total Travel Position values for pin plunger, and Total Travel Position value for lever.
Close or open circuit of the contact is 1 ms max.
***2.** For testing conditions, consult your OMRON sales representative.


Downloaded from Arrow.com.

Terminals (Unit: mm)


● PCB Terminals (Straight)

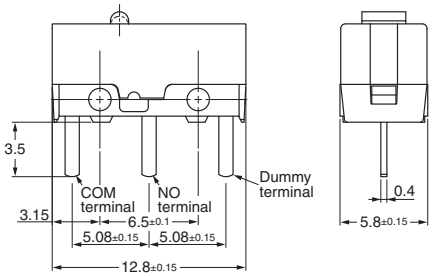

● PCB terminals (Self-clinching)

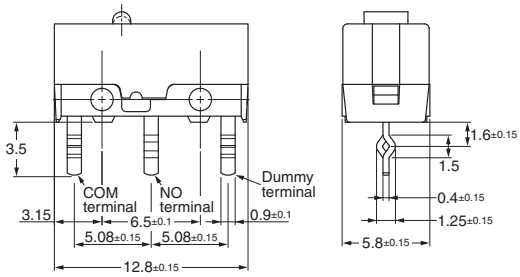


PCB Mounting Dimensions (Reference)




Don't connect the dummy terminal to the circuit.

● PCB Terminals (Right-angled)

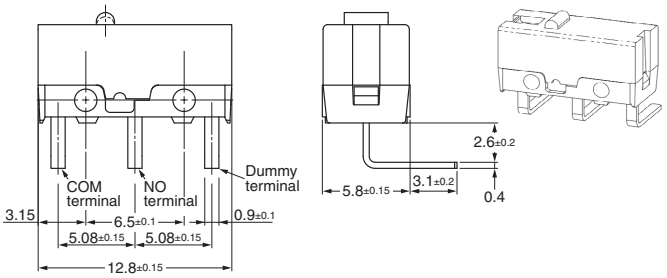

● PCB Terminals (Left-angled)

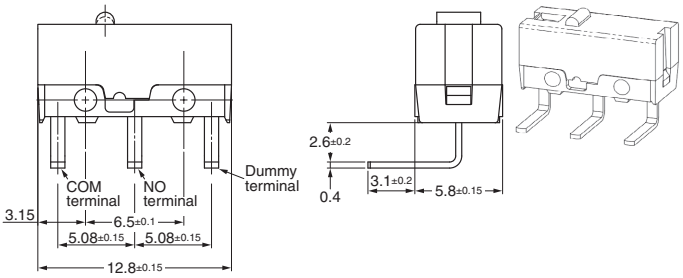


Dimensions (Unit: mm) / Operating Characteristics

The following illustrations and drawings are for D2FS models with PCB terminals (straight). Self-clinching, and right-angled, left angled terminals are omitted from the following drawings. Refer to the above for these terminals.
When ordering, replace □ with the code for the terminal that you need. See the "**List of Models**" for available combinations of models.

● Pin Plunger Models

D2FS-F-N□




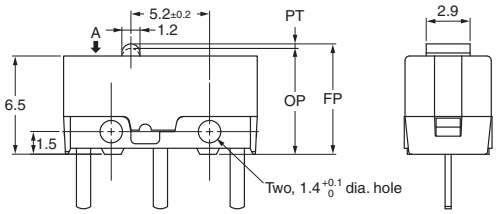


Model	D2FS-F-N□
OF max. RF min.	0.85 N {87 gf} 0.05 N {5 gf}
PT max. OT min. MD max.	0.5 mm 0.25 mm 0.12 mm
FP max. OP	7.5 mm 7.0 ± 0.3 mm

● Hinge Lever Models

D2FS-FL-N□



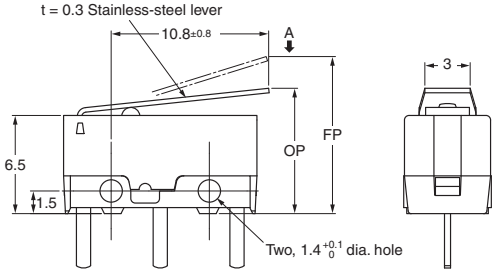

Model	D2FS-FL-N□
OF max. RF min.	0.25 N {25 gf} 0.02 N {2 gf}
OT min. MD max.	0.55 mm 0.5 mm
FP max. OP	11.5 mm 8.3 ± 1.2 mm

Note: 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.
2. The operating characteristics are for operation in the A direction (⬇).

Downloaded from Arrow.com.

Precautions

★**Refer to General Information.**

Cautions

● Soldering

- When using automatic soldering baths, we recommend soldering at 260°C within 5 seconds. Make sure that the liquid surface of the solder does not flow over the edge of the board.
- When soldering terminals manually, perform soldering within 3 seconds at iron tip temperature not higher than 350°C. Do not apply any external force for at least 1 minute after soldering. When applying solder, keep the solder away from the case of the Switch and do not allow solder or flux to flow into the case.


● Side-actuated (Cam/Dog) Operation

- When using a cam or dog to operate the Switch, factors such as the operating speed, operating frequency, push-button indentation, and material and shape of the cam or dog will affect the durability of the Switch. Confirm performance specifications under actual operating conditions before using the Switch in applications.

Correct Use

● Handling

- When handling the Switch, ensure that uneven pressure or, as shown in the following diagram, pressure in a direction other than the operating direction is not applied to the Actuator, otherwise the Actuator or Switch may be damaged, or durability may be decreased.

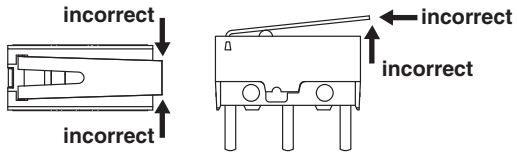

● Using Micro Loads

- Even when using micro load models within the operating range, inrush currents or surges may decrease the life expectancy of the Switch. Therefore, insert a contact protection circuit where necessary.

● Application Environment

- Do not use the Switch in locations that are subject to toxic gas, silicon, excessive dust, excessive dirt, high temperatures, high humidity, sudden temperature changes, water splashes, or oil splashes.
  Otherwise, damage resulting by faulty contact of the Switch contacts, corrosion, or other causes, or other functional faults may occur.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us
Asia-Pacific
https://components.omron.com/ap
Korea
https://components.omron.com/kr
Europe
https://components.omron.com/eu
China
https://components.omron.com.cn
Japan
https://components.omron.com/jp

© OMRON Corporation 2007-2022 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. B121-E1-05
1122 (0207)

Downloaded from Arrow.com.