

Description: 2012 Band Pass Filter
PART NUMBER: BPF2012LKBMR6580A
(Preliminary)
Features:

- Compact size
- RoHS compliant
- AEC-Q200 Qualified

Applications:

- IEEE 802.15.4
- UWB

ELECTRICAL SPECIFICATIONS

DESCRIPTION	Value
Pass Band	6240~8240 MHz
Insertion Loss	1.86 dB(Typ.) 2.5 dB (Max.) at 25°C 2.5 dB (Max.) at -40~85°C
Return Loss	12.2dB(Typ.) 10 dB (Min.)
Attenuation	38.7 dB (Typ.) 35 dB (Min.) @ DC~5200 MHz 16.9 dB (Typ.) 15 dB (Min.) @ 5200~5860 MHz 27.8 dB (Typ.) 10 dB (Min.) @ 9000~9500 MHz 33 dB (Typ.) 30 dB (Min.) @ 9500~18000 MHz
Group delay	0.81 ns (Typ.) 3 ns (Max.) @ 6240~8240 MHz
Group delay ripple	0.44 ns (Typ.) 1 ns (Max.) @ 6240~8240 MHz
Operating Temperature	-40 ~ +125°C
Power Capacity	3W Max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:




Pulse Worldwide Headquarters
 15255 Innovation Drive #100
 San Diego, CA 92128
 USA
 Tel: 1-858-674-8100

Pulse/Larsen Antennas
 18110 SE 34th St Bldg 2 Suite 250
 Vancouver, WA 98683
 USA
 Tel: 1-360-944-7551


Europe Headquarters
 Pulse GmbH & Co, KG
 Zeppelinstrasse 15
 Herrenberg, Germany
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
 99 Huo Ju Road(#29 Bldg,4th Phase
 Suzhou New District
 Jiangsu Province, Suzhou 215009 PR China
 Tel: 86 512 6807 9998

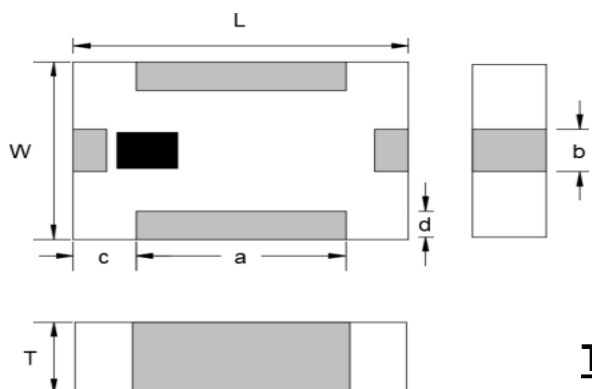
Description: 2012 Band Pass Filter
PART NUMBER: BPF2012LKBMR6580A
(Preliminary)
MECHANICAL DIMENSION
Outline

Dimension

L	W	T	a
2.00±0.15	1.25±0.10	0.95±0.10	1.25±0.15
b	v	d	
0.30±0.15	0.35±0.15	0.25±0.15	

NOTE : Dimensions in mm.

Termination

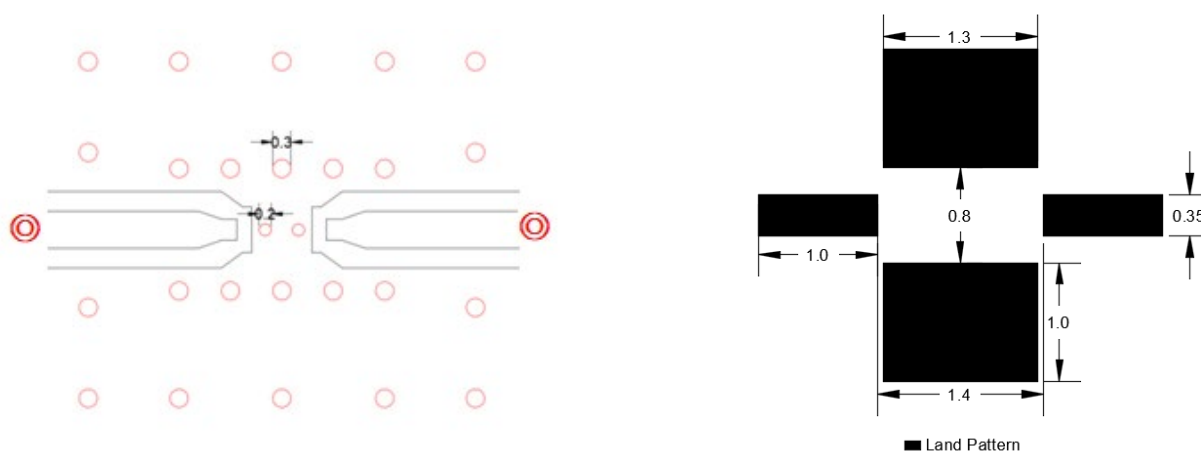Terminal name
Function

1	GND
2	IN/OUT (not connected to GND)
3	GND
4	IN/OUT (not connected to GND)

Reference design of EVB


Unit : mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 Band Pass Filter



PART NUMBER: BPF2012LKBMR6580A
(Preliminary)

MEASURING DIAGRAM

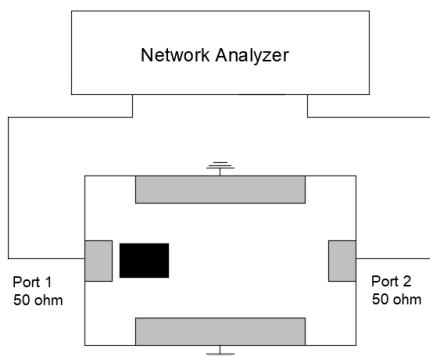

Test Instrument :
Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

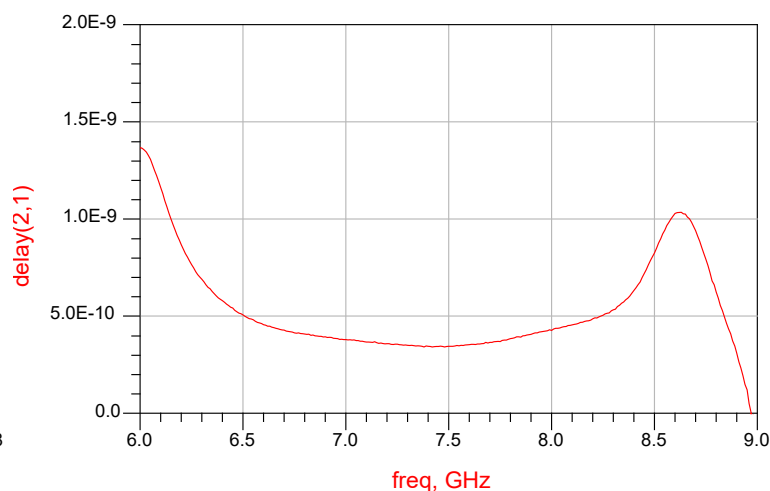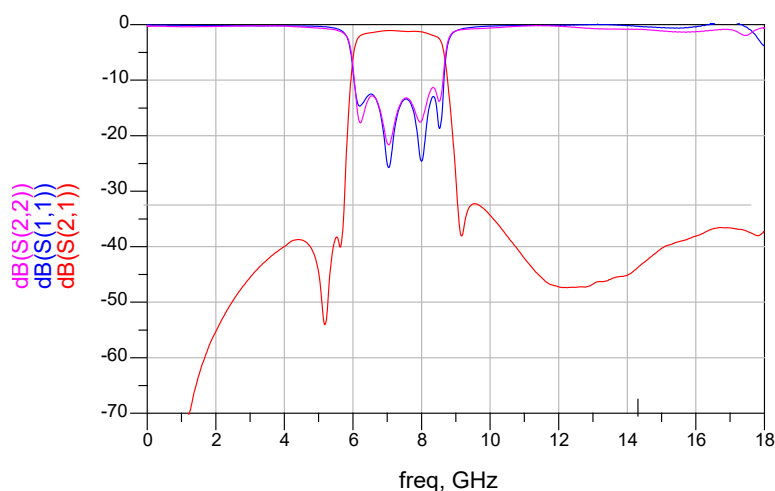

● Measured on Agilent E5071C
Network Analyzer

Frequency Characteristics

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 Band Pass Filter

PART NUMBER: BPF2012LKBMR6580A
(Preliminary)


PACKING SPECIFICATION

Peel-off force

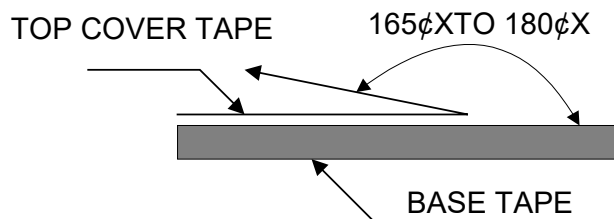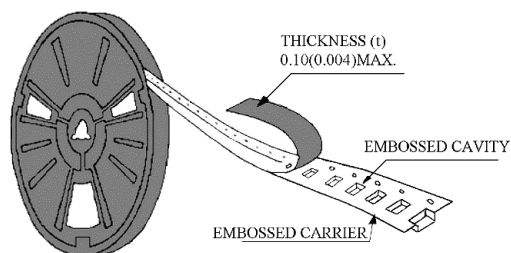

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)

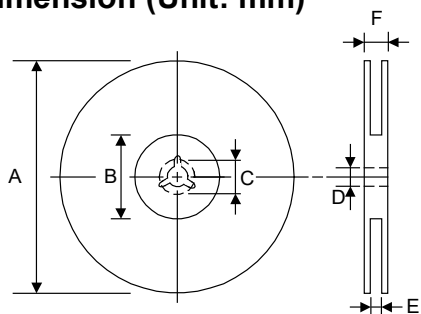

TYPE	A	B	C	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

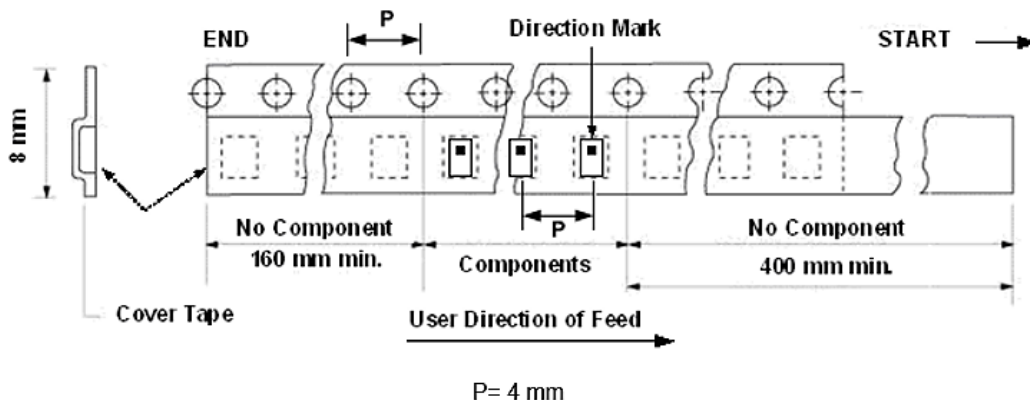

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 Band Pass Filter**PART NUMBER:** BPF2012LKBMR6580A
(Preliminary)**REVISION HISTORY**

Revision	Date	Description
Preliminary	Nov. 16, 2022	- New issue

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

