



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V	REVISED PER ECR-23-173364	25MAY2023	SS	AF

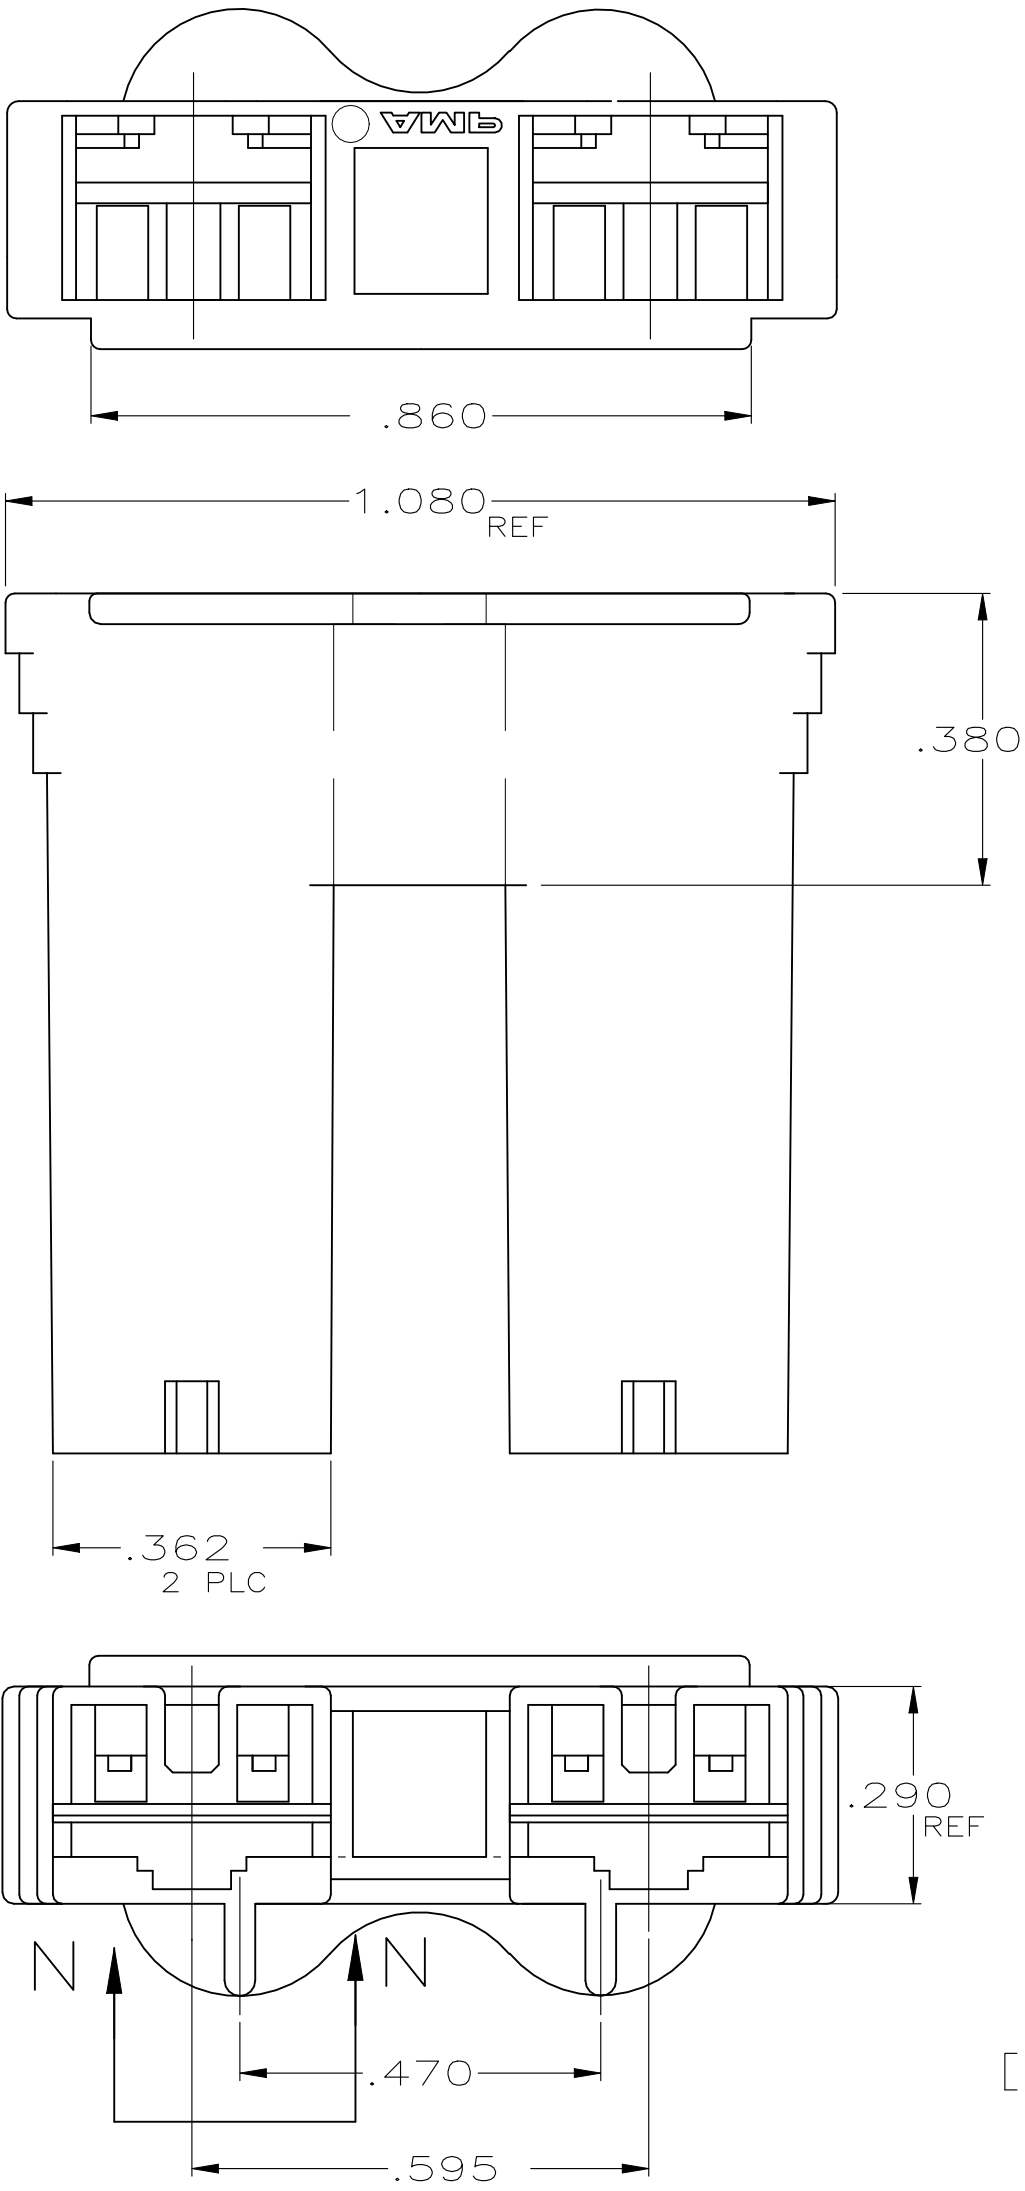

- 1 GLOW WIRE APPROVED; CONTACT TE ENGINEERING FOR SPECIFICATION
- 2 ALL WALL THICKNESSES ARE BETWEEN .016 INCH (0.4MM) AND .118 INCH (3.0MM)

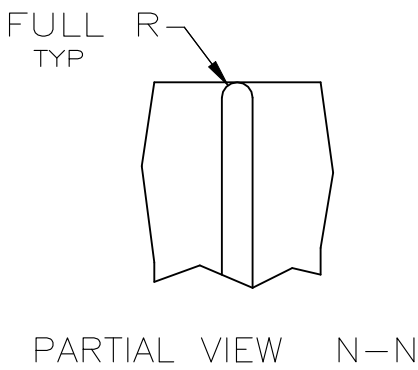

	RED	66 NYLON V0, GWT RED	2-521229-2
	NATURAL	66 NYLON V0, GWT NATURAL	2-521229-1
1	RED	NYLON 6, UL94-V2	1-521229-2
1	NATURAL	NYLON 6, UL94-V2	1-521229-1
	RED	NYLON 66/6, UL94-V0	521229-2
	NATURAL	NYLON 66/6, UL94-V0	521229-1
NOTES	COLOR	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 05NOV99	TE Connectivity	
DIMENSIONS: INCHES		CHK M FEHER 05NOV99		
		APVD D BRATINA 05NOV99		
		PRODUCT SPEC		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	NAME	
0 PLC ± -		114-2074	HOUSING, RECEPTACLE, FASTON, POSITIVE-LOCK MK II, .250 SERIES	
1 PLC ± -		WEIGHT -	SIZE A2	CAGE CODE 00779
2 PLC ± -		DRAWING NO C-521229		RESTRICTED TO -
3 PLC ± .010		SCALE 4:1		SHEET 1 OF 1
4 PLC ± -		REV V		
ANGLES ± -		CUSTOMER DRAWING		
FINISH				
SEE TABLE				