

APSMAJ SERIES

SURFACE MOUNT UNIDIRECTIONAL AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

STAND-OFF VOLTAGE – 6.8 to 120 Volts
POWER DISSIPATION - 400 Watts


FEATURES

- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL flammability classification 94V-0
- Glass Passivation used, IR less than 0.5uA above 11V
- Fast response time: typically less than 1.0ns for Uni-direction less than 5.0ns for Bi-direction from 0 Volts to BV min
- RoHS compliant
- AEC-Q101 qualified
- PPAP capable
- Automotive grade
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e.: parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please refer to the related automotive grade (Q-suffix) part. A listing can be found at <https://www.diodes.com/products/automotive/automotive-products/>.**
- This part is qualified to JEDEC standards (as references in AEC-Q) for High Reliability.
<https://www.diodes.com/quality/product-definitions/>

MECHANICAL DATA

- Package: Molded plastic
- Package Material: Molding compound, UL Flammability classification 94V-0, (No Br. Sb. Cl.) "Halogen-free"
- Polarity: by cathode band denotes uni-directional device, none cathode band denotes bi-directional device
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL STD-202, Method 208 e3
- Weight: 0.002 ounces, 0.064 gram (Approximate)

SMA



SMA		
DIM.	MIN.	MAX.
A	4.06	4.57
B	2.29	2.92
C	1.27	1.63
D	0.15	0.31
E	4.83	5.59
F	0.05	0.20
G	1.96	2.40
H	0.76	1.52

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
PEAK POWER DISSIPATION AT $T_J = 25^\circ\text{C}$, $TP = 1\text{ms}$ (Note 4)	P_{PK}	400	W
Peak Forward Surge Current 8.3ms single half sine-wave @ $T_J = 25^\circ\text{C}$ (Note 5)	I_{FSM}	40	A
Steady State Power Dissipation, with PCB	$P_{M(AV)}$	1.0	W
Maximum Instantaneous forward voltage at 16A (Notes 5, 6)	V_F	3.0	V
Operating Temperature Range	T_J	-55 to +175	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C

Notes:

1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
4. Non-repetitive current pulse, per fig.3 and derated above $TA=25^\circ\text{C}$ per fig.1.
5. Only for uni-directional units.
6. VF max=3V at IF=16A 300us square wave pulse.

ELECTRICAL CHARACTERISTICS

Device Uni- Directional	Device Bi- Directional	Device Marking Code		Reverse Standoff Voltage	Breakdown Voltage VBR Volts			Max. Peak Pulse Current	Max. Clamping Voltage @Ipp	Max. Peak Pulse Current
(UNI)	(BI)	(UNI)	(BI)	VR (V)	Min (V)	Max (V)	It (mA)	IR (uA)	Vc (V)	Ipp (A)
APSMAJ6.8A	APSMAJ6.8CA	A6V8A	A6V8C	5.8	6.45	7.13	10	10.5	38.1	1000
APSMAJ7.5A	APSMAJ7.5CA	A7V5A	A7V5C	6.4	7.13	7.88	10	11.3	35.4	500
APSMAJ8.2A	APSMAJ8.2CA	A8V2A	A8V2C	7.0	7.79	8.61	10	12.1	33.1	200
APSMAJ9.1A	APSMAJ9.1CA	A9V1A	A9V1C	7.8	8.65	9.56	1.0	13.4	29.9	50
APSMAJ10A	APSMAJ10CA	A10A	A10C	8.6	9.50	10.5	1.0	14.5	27.6	10
APSMAJ11A	APSMAJ11CA	A11A	A11C	9.4	10.5	11.6	1.0	15.6	25.6	5
APSMAJ12A	APSMAJ12CA	A12A	A12C	10.	11.4	12.6	1.0	16.7	24.0	0.5
APSMAJ13A	APSMAJ13CA	A13A	A13C	11.	12.4	13.7	1.0	18.2	22.0	0.5
APSMAJ15A	APSMAJ15CA	A15A	A15C	12.8	14.3	15.8	1.0	21.2	18.9	0.5
APSMAJ16A	APSMAJ16CA	A16A	A16C	13.6	15.2	16.8	1.0	22.5	17.8	0.5
APSMAJ18A	APSMAJ18CA	A18A	A18C	15.3	17.1	18.9	1.0	25.2	15.9	0.5
APSMAJ20A	APSMAJ20CA	A20A	A20C	17.1	19.0	21.0	1.0	27.7	14.4	0.5
APSMAJ22A	APSMAJ22CA	A22A	A22C	18.8	20.9	23.1	1.0	30.6	13.1	0.5
APSMAJ24A	APSMAJ24CA	A24A	A24C	20.5	22.8	25.2	1.0	33.2	12.0	0.5
APSMAJ27A	APSMAJ27CA	A27A	A27C	23.1	25.7	28.4	1.0	37.5	10.7	0.5
APSMAJ30A	APSMAJ30CA	A30A	A30C	25.6	28.5	31.5	1.0	41.4	9.7	0.5
APSMAJ33A	APSMAJ33CA	A33A	A33C	28.2	31.4	34.7	1.0	45.7	8.8	0.5
APSMAJ36A	APSMAJ36CA	A36A	A36C	30.8	34.2	37.8	1.0	49.9	8.0	0.5
APSMAJ39A	APSMAJ39CA	A39A	A39C	33.3	37.1	41.0	1.0	53.9	7.4	0.5
APSMAJ43A	APSMAJ43CA	A43A	A43C	36.8	40.9	45.2	1.0	59.3	6.7	0.5
APSMAJ47A	APSMAJ47CA	A47A	A47C	40.2	44.7	49.4	1.0	64.8	6.2	0.5
APSMAJ51A	APSMAJ51CA	A51A	A51C	43.6	48.5	53.6	1.0	70.1	5.7	0.5
APSMAJ56A	APSMAJ56CA	A56A	A56C	47.8	53.2	58.8	1.0	77.0	5.2	0.5
APSMAJ62A	APSMAJ62CA	A62A	A62C	53.0	58.9	65.1	1.0	85.0	4.7	0.5
APSMAJ68A	APSMAJ68CA	A68A	A68C	58.1	64.6	71.4	1.0	92.0	4.3	0.5
APSMAJ75A	APSMAJ75CA	A75A	A75C	64.7	71.3	78.8	1.0	103.0	3.9	0.5
APSMAJ82A	APSMAJ82CA	A82A	A82C	70.1	77.9	86.1	1.0	113.0	3.5	0.5
APSMAJ91A	APSMAJ91CA	A91A	A91C	77.8	86.5	95.6	1.0	125.0	3.2	0.5
APSMAJ100A	APSMAJ100CA	A100A	A100C	85.5	95.0	105.0	1.0	137.0	2.9	0.5
APSMAJ110A	APSMAJ110CA	A110A	A110C	94.0	105.0	116.1	1.0	152.0	2.6	0.5
APSMAJ120A	APSMAJ120CA	A120A	A120C	102.0	114.0	126.0	1.0	165.0	2.4	0.5







Notes:

Suffix 'A' denotes 5% tolerance device.

1.) Add suffix 'C' or ' CA' after part number to specify Bi-directional devices.

2.) The IR limit is double for Bi-Directional devices.

RATING AND CHARACTERISTIC CURVES
APSMAJ SERIES

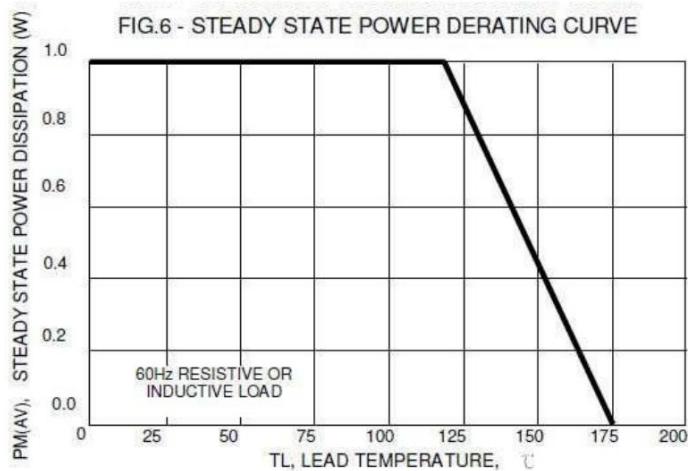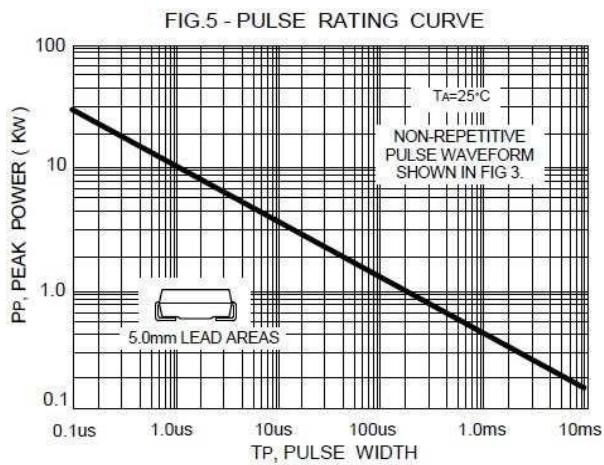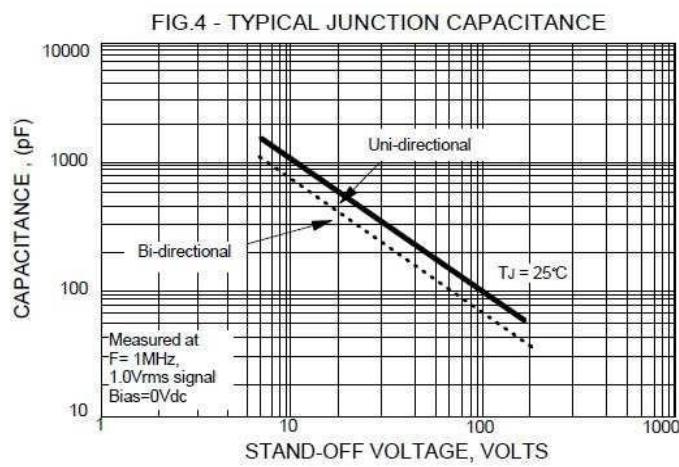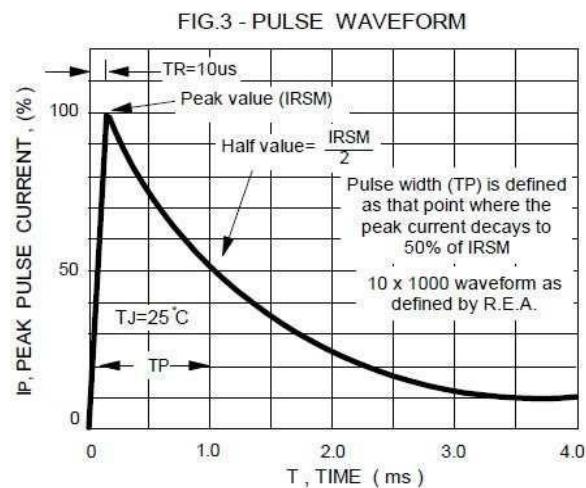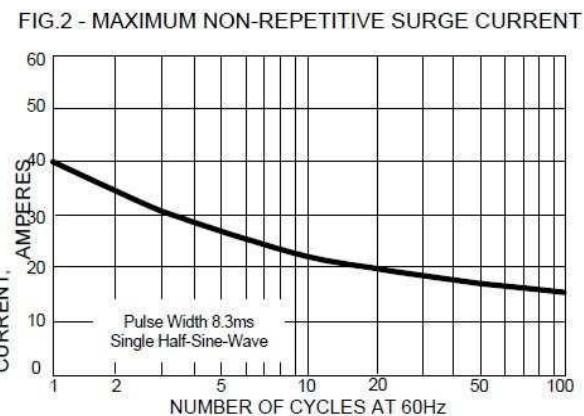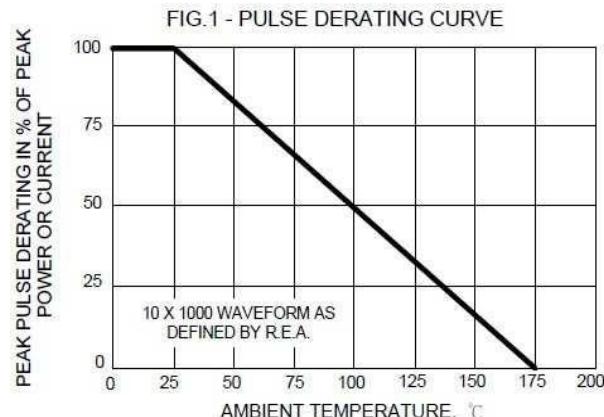

Ordering Information :

Orderable Part Number	Package	Packing	
		Qty.	Carrier
APSMAJ SERIES	SMA	5000pcs	Reel

Marking Information :




XXXX : Assembly Tracing Code
ZZZ : Product Type Marking Code
Bar Denotes Cathode Side

Packaging Information :

DEVICE	Q'TY/REEL (PCS)	REEL DIA. (INCH)	Q'TY/BOX (PCS)	Q'TY/CARTON (PCS)
APSMAJXXA APSMAJXXCA	5000	13	10K	80K

Suggested Pad Layout :

SMA

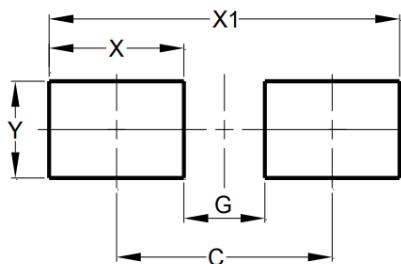

Dimensions	Value (in mm)
C	4.00
G	1.50
X	2.50
X1	6.50
Y	1.70

Note: The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application. These dimensions may be modified based on user equipment capability or fabrication criteria. A more robust pattern may be desired for wave soldering and is calculated by adding 0.2 mm to the 'Z' dimension. For further information, please reference document IPC-7351A, Naming Convention for Standard SMT Land Patterns, and for International grid details, please see document IEC, Publication 97.

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com