



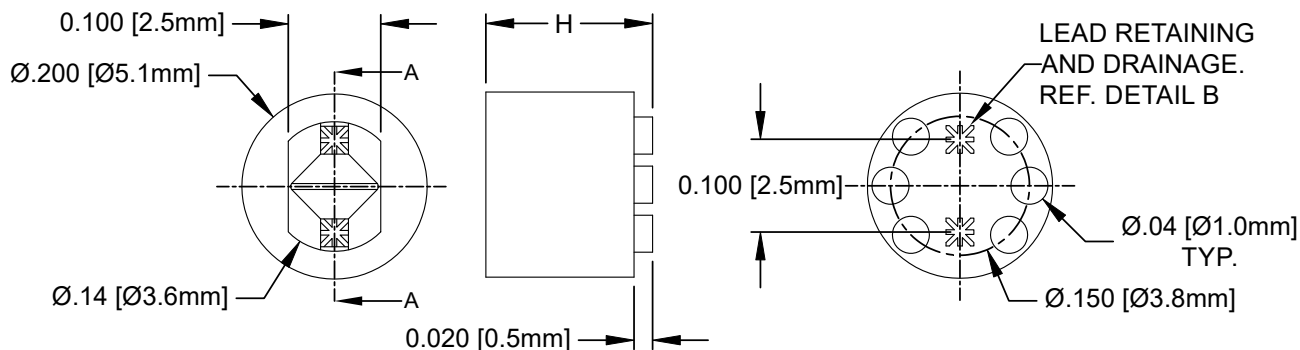


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
E	Changed LTM Material from 44-BK to 56-BK	06/27/07	M. C.
F	Updated Note 3.	09/24/13	T. Y.
G	Chg LTM Material to Halogen Free	11/20/19	A.V.
H	Chg LTM Material to 15%GF, ECO 1026	11/22/19	A.V.
J	ECO-1388 Fixed Dual Dimension Typo	06/09/26	A.V.



SECTION A-A

PART NO.	H	DH	PART NO.	H	DH	PART NO.	H	DH
LTM / NTM-120	.120(3.1)	.060(1.5)	LTM / NTM-300	.300(7.6)	.185(4.7)	LTM / NTM-490	.490(12.5)	.310(7.9)
LTM / NTM-130	.130(3.3)		LTM / NTM-310	.310(7.9)		LTM / NTM-500	.500(12.7)	.435(11.1)
LTM / NTM-140	.140(3.6)		LTM / NTM-320	.320(8.1)		LTM / NTM-520	.520(13.2)	
LTM / NTM-150	.150(3.8)		LTM / NTM-330	.330(8.4)		LTM / NTM-550	.550(14.0)	
LTM / NTM-160	.160(4.1)		LTM / NTM-340	.340(8.6)		LTM / NTM-570	.570(14.5)	
LTM / NTM-170	.170(4.3)		LTM / NTM-350	.350(8.9)		LTM / NTM-600	.600(15.2)	
LTM / NTM-180	.180(4.6)		LTM / NTM-360	.360(9.1)		LTM / NTM-620	.620(15.8)	.560(14.2)
LTM / NTM-190	.190(4.8)		LTM / NTM-370	.370(9.4)		LTM / NTM-650	.650(16.5)	
LTM / NTM-200	.200(5.1)		LTM / NTM-380	.380(9.7)		LTM / NTM-670	.670(17.0)	
LTM / NTM-210	.210(5.3)		LTM / NTM-390	.390(9.9)		LTM / NTM-700	.700(17.8)	
LTM / NTM-220	.220(5.6)	.185(4.7)	LTM / NTM-400	.400(10.2)	.310(7.9)	LTM / NTM-720	.720(18.3)	.690(17.5)
LTM / NTM-230	.230(5.8)		LTM / NTM-410	.410(10.4)		LTM / NTM-750	.750(19.1)	
LTM / NTM-240	.240(6.1)		LTM / NTM-420	.420(10.7)		LTM / NTM-770	.770(19.6)	
LTM / NTM-250	.250(6.4)		LTM / NTM-430	.430(10.9)		LTM / NTM-800	.800(20.3)	
LTM / NTM-260	.260(6.6)		LTM / NTM-440	.440(11.2)		LTM / NTM-820	.820(20.8)	
LTM / NTM-270	.270(6.9)		LTM / NTM-450	.450(11.4)		LTM / NTM-850	.850(21.6)	
LTM / NTM-280	.280(7.1)		LTM / NTM-460	.460(11.7)		LTM / NTM-870	.870(22.1)	
LTM / NTM-290	.290(7.4)		LTM / NTM-480	.480(12.2)		LTM / NTM-900	.900(22.9)	

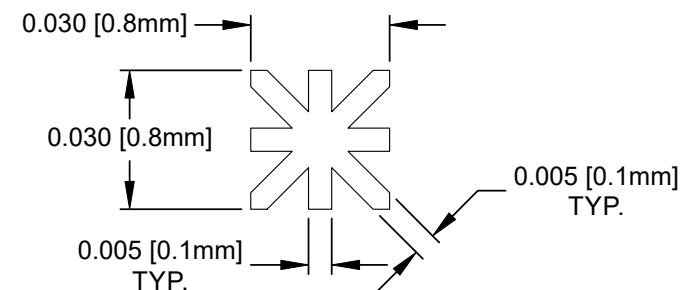

DETAIL B
SCALE 5:1

CUSTOMER USE DRAWING

2. NTM MATERIAL: NYLON 6/6, 94V-2, NATURAL. BIVAR MATERIAL CODE 03-NL.

1. LTM MATERIAL: PBT+15% GLASS FILLED, 94V-0, BLACK.

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR® 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	TITLE: MOLDED, SELF-RETAINING LED MOUNT	
.XX ± .01			
.XXX ± .005		DRAWING NO: LTM-NTM-XXX	
DESIGNED: David Green	DATE: 01/06/03	REVISION: J	
REVISED: K. BARON	DATE: 6/9/2026	SHEET SIZE	A
CHECKED: R. PEREYRA	DATE: 6/9/2026	CAGE CODE: 32559	
		SCALE: NONE	SHEET # 1 OF 1
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING			