

1424437

https://www.phoenixcontact.com/us/products/1424437

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Panel mounting base M1, with single locking latch, material: PA, height: 24 mm, cable gland: none, protective cover: no, Standard, for modular contact inserts

### **Commercial Data**

Item number	1424437
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF56
Product Key	BF7APB
Catalog Page	Page 595 (C-2-2019)
GTIN	4055626372563
Weight per Piece (including packing)	47.6 g
Weight per Piece (excluding packing)	22.22 g
Customs tariff number	85389099
Country of origin	CN



https://www.phoenixcontact.com/us/products/1424437



### **Technical Data**

### Notes

General	for single module width modular contact inserts from the
	HEAVYCON modular system

### Product properties

Туре	M1
Product type	Housing with locking latch
Application	Standard
Housing type	Panel mounting base
Protective cover	no
Locking type	with single locking latch
Shielded	no
Pg screw connection	none

### **Dimensions**

Dimensional drawing	94.5 957 98.6 21.6 40.6
Width	40.6 mm
Height	24 mm
Length	68.6 mm
Drill hole distance, horizontal	57 mm
Drill hole distance, vertical	21.6 mm
Hole diameter	4.5 mm
Installation dimensions	
Width of the assembly cutout	28.6 mm
Length of the assembly cutout	48.2 mm

### Material specifications

Color	black
Flammability rating according to UL 94	V0 (Housing)
	V0 (Interlock)
Seal material	NBR, conductive
Locking latch material	PA
Housing material	PA

### Mechanical properties

Mecl	nanical	data

Locking type	Latch



https://www.phoenixcontact.com/us/products/1424437



### Mounting

Assembly instructions	The housing can accommodate all Phoenix Contact modules with a single module width. Exception: Push-in TWIN modules with Order Numbers 1423962 and 1423961 may not be used due to the lack of rotation protection.
	The housing can accommodate all Phoenix Contact modules with single module width. Exception: Push-in TWIN modules with Item No 1423962 and 1423961 may not be used due to the lack of rotation protection.

### Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-40 °C 125 °C





https://www.phoenixcontact.com/us/products/1424437



### Drawings


### Dimensional drawing

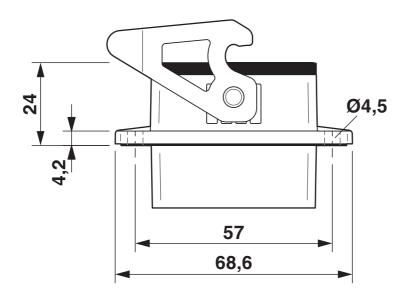

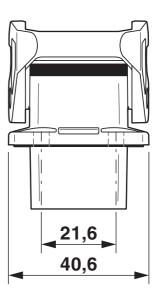

Dimensional drawing

### Dimensional drawing

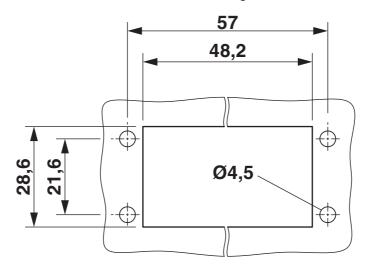


Mounting cutout



https://www.phoenixcontact.com/us/products/1424437



### Dimensional drawing

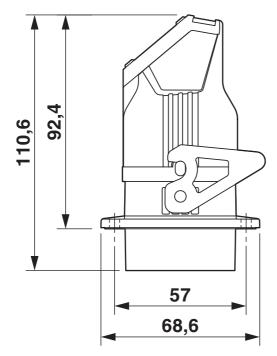

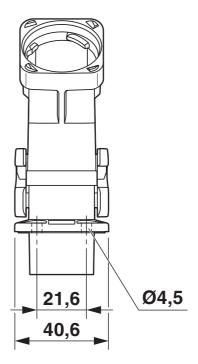


Figure may contain other products.



1424437

https://www.phoenixcontact.com/us/products/1424437

### **Approvals**



Approval ID: TAE000037S



**EAC** 

Approval ID: RU C-DE.Al30.B.01102



**EAC** 

Approval ID: RU C-DE.BL08.B.00511



**cUL Recognized**Approval ID: E255026



**UL Recognized**Approval ID: E255026

cULus Recognized



1424437

https://www.phoenixcontact.com/us/products/1424437

### Classifications

### **ECLASS**

ECLASS-9.0	27440202
ECLASS-10.0.1	27440202
ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
TIM	

### ETIM

ETIM 8.0 EC000437
-------------------

### **UNSPSC**

UNSPSC 21.0	31261500
-------------	----------



https://www.phoenixcontact.com/us/products/1424437



### **Environmental Product Compliance**

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



1424437

https://www.phoenixcontact.com/us/products/1424437

### Accessories

### HC-1/2M-UT-F-6-PE - Contact insert module

1424438

https://www.phoenixcontact.com/us/products/1424438



Contact insert module, Socket, Screw connection, 0.5 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: PE transmission, for housing size HC-EVO-M1

### HC-M1-BCFS-P-BK - Protective cover

1346556

https://www.phoenixcontact.com/us/products/1346556



Protective cover M1, for single locking latch, protective cover material: PC, height: 26.1 mm, seal: no, for panel-mount base

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com