
# 829492-3 Product Details

Live Product Chat US Only 8:30am - 5pm ET, Mon - Fri

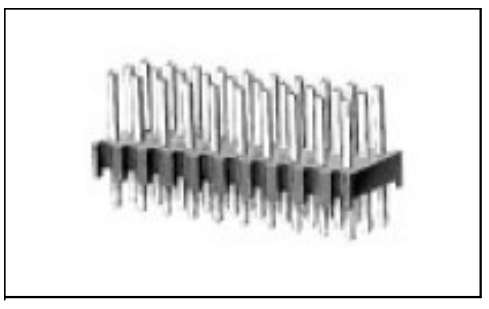

829492-3

Active

## .100 inch AMPMODU Headers

Always EU RoHS/ELV Compliant (Statement of Compliance)

**Product Highlights:**

- Header
- Header Type = Breakaway
- Number of Rows = Triple
- Number of Positions = 9
- Mating Post Length = 7.00 mm

View all Features | Find Similar Products

**Quick Links**

Check Pricing & Availability
Search for Tooling
Product Feature Selector
Contact Us About This Product

## Documentation & Additional Information

**Product Drawings:**

- AMPMODU II PINHEADER TRIPLE ROW STIFTLEISTE DREIREIHIG (PDF, English)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files:**

- None Available

List all Documents

**Additional Information:**

- Product Line Information

**Related Products:**

- Tooling

## Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- Product Type = Header
- Number of Positions = 9
- Mount Angle = Vertical
- PCB Retention Feature = No
- Surface Mount Compatible = No
- Board Standoff = Without
- Mounting Ears = Without
- Mating Connector Lock = Without
- Profile = Standard
- Comment = Headers are side-to-side stackable.

**Mechanical Attachment:**

- Mating Post Length (mm [in]) = 7.00 [0.276]
- Panel Attachment = Without

**Termination Related Features:**

- Termination (Solder) Post Length (mm [in]) = 3.15 [0.124]
- Solder Tail Contact Plating = Tin

**Body Related Features:**

- Header Type = Breakaway
- Number of Rows = Triple
- Centerline, Matrix (mm [in]) = 2.54 x 2.54 x 2.54 [.100 x .100 x .100]
- Selectively Loaded = No
- Mount Type = PC Board

**Contact Related Features:**

- Contact Mating Area Plating = Gold (30)
- Contact Material = Phosphor Bronze

**Housing Related Features:**

- Housing Material = Thermoplastic Polyester
- Housing Flammability Rating = UL 94V-0

**Industry Standards:**

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- High Temperature Housing = No

**Operation/Application:**

- High Speed Serial Data Connector = No

**Other:**

- Brand = AMP


© 2008 Tyco Electronics Corporation All Rights Reserved

Downloaded from Arrow.com.