


The Digi One SP device server is designed for standard serial-to-Ethernet connectivity. It is ideal for applications requiring simple and easy-to-use data communications.

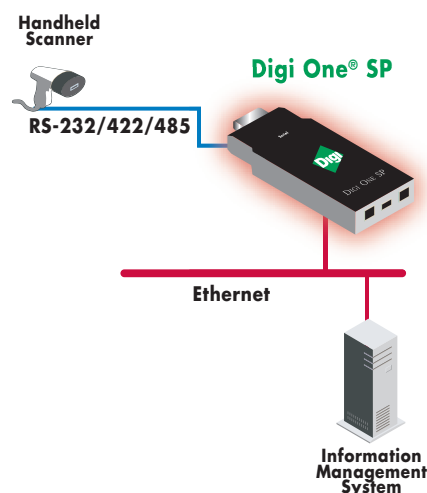

Features/Benefits

- Easy configuration using installation CD
- Digi's patented RealPort® technology for COM or TTY port control and management
- TCP/UDP Socket Services for broad device connectivity and application use
- Auto-connect the serial device to networked server using raw, Telnet, Rlogin
- Reverse Telnet for easy access of serial devices from network
- Easy configuration through web interface (HTTP)
- Switch selectable RS-232/422/485 for simple interfacing to any type of serial device
- Modem emulation allows support for devices designed only for modem communications

Overview

The Digi One SP device server allows any device with a serial port to easily connect to the Ethernet. Its compact design delivers cost-effective performance and capability in one of the smallest form factors available.

Part of Digi's broad device server offering, the Digi One SP delivers standard serial-to-Ethernet connectivity and is ideal for serial tunneling, or where TCP/UDP socket or multiple unicast functionality is needed. Serial tunneling allows two previously non-networked and isolated devices to easily communicate information and operate with existing installed software applications on an Ethernet network, eliminating the long serial cable. The Digi One SP also works with software applications using TCP/UDP Sockets, allowing a serial device to interoperate with the software applications without the need to install a driver.

The Digi One SP is easy to install locally or remotely through a variety of IP addressing methods, including DHCP, RARP, and ARP-Ping. Included on the installation CD is an application that will automatically detect all Digi One SP devices on your network. A quick-start guide is also provided to make network configuration easy and hassle-free.

Features/Specifications

FEATURES

- RS-232/422/485 switch selectable
- DB-9M serial connector
- Baud rates up to 230 Kbps
- Full modem and hardware flow control
- Modem emulation
- 10/100Base-T Ethernet support
- TCP/UDP Socket Services
- Supports multiple unicasts
- Telnet and Reverse Telnet
- DHCP/RARP/ARP-Ping for IP address assignment
- HTTP configuration
- Patented RealPort technology for COM and TTY ports
- LED status for link and power

OPERATING SYSTEMS

RealPort drivers for COM/TTY support

- AIX
- HP-UX
- Linux
- Windows® 98/98SE
- Windows ME
- Windows XP
- Windows 2000
- Windows Server™ 2003
- Windows NT®
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)

DIMENSIONS

- Length: 3.70 in (9.04 cm)
- Width: 1.72 in (4.30 cm)
- Depth: 0.93 in (2.30 cm)
- Weight: 2.29 oz (65.00 g)

REGULATORY APPROVALS

- FCC Part 15 Subpart B, Class A
- EN55022, Class A
- EN55024
- EN61000-3-2,3
- UL60950
- CAN/CSA C22.2 No.60950
- EN60950

ENVIRONMENTAL

- Operating temperature: 10° C to 45° C (50° F to 113° F)
- Relative humidity: 5% to 90% (non-condensing)

POWER REQUIREMENTS


- Power supply included
 - North America**
12VDC/.5A max out; 120VAC in (wall mount)
 - International**
12VDC/.5A max out; 100-240VAC in (small brick)
- Product will accept 9-30VDC
- Power Consumption
 - Typical: 4W
 - Max: 6W
- Surge Protection (with included power supply)
 - 4 kV burst (EFT)
 - 2 kV surge

Digi One SP - Front




DB-9M Serial

Digi One SP - Back



Ethernet Power

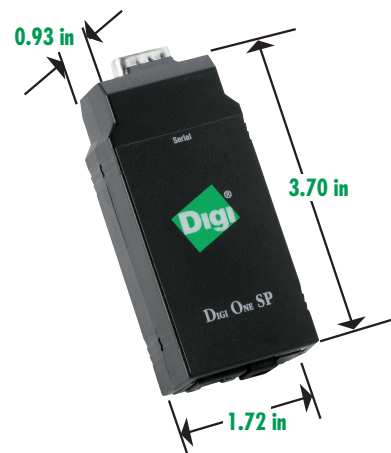

Wall Bracket

MODEL PART NUMBERS

Model	North America	International
Digi One SP	70001851	70001852
Accessories		
Wall Mount Bracket	76000662	76000662
DB-9F to DB-9F Crossover Cable (4-ft.)	76000642	76000642
Replacement Power Supply (wall mount)	76000737	N/A
Replacement Power Supply (small brick)	76000654	76000654

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Unit 3206 - 08A, 32/F,
AIA Tower
183 Electric Road,
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 1999-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo, Digi One and RealPort are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders.

**WHEN
RELIABILITY
MATTERS™**

91001157
D2/808

