Full Color PLCC4 LED

OVSARGB4R8



Features:

- Surface mount device packaged in 8 mm tape on 7” diameter reel
- Compatible with automatic placement equipment
- Compatible with infrared and vapor phase reflow solder
- Dimensions: 3.5 x 2.8 x 1.9 mm
- 120° viewing angle


Description:

The OVSARGB4R8 provides full color light output from a single package, 3-die design. This surface mount package is an efficient solution in modular applications that require uniform brightness and color-on-demand. Light output is optimized by an interior reflector, and the wide viewing angle adds flexibility for applications ranging from hand-held appliances to automotive interiors.

Applications:

- RGB full-color indoor and outdoor displays
- Backlighting
- Coupling into light guides
- Automotive interiors
- Entertainment equipment

Part Number	Chip				Lens Color
	Type	Material	Emitted Color	Intensity Typ. Mcd	
OVSARGB4R8	R G B	AlInGaP InGaN InGaN	Red Green Blue	635 1000 335	Diffused

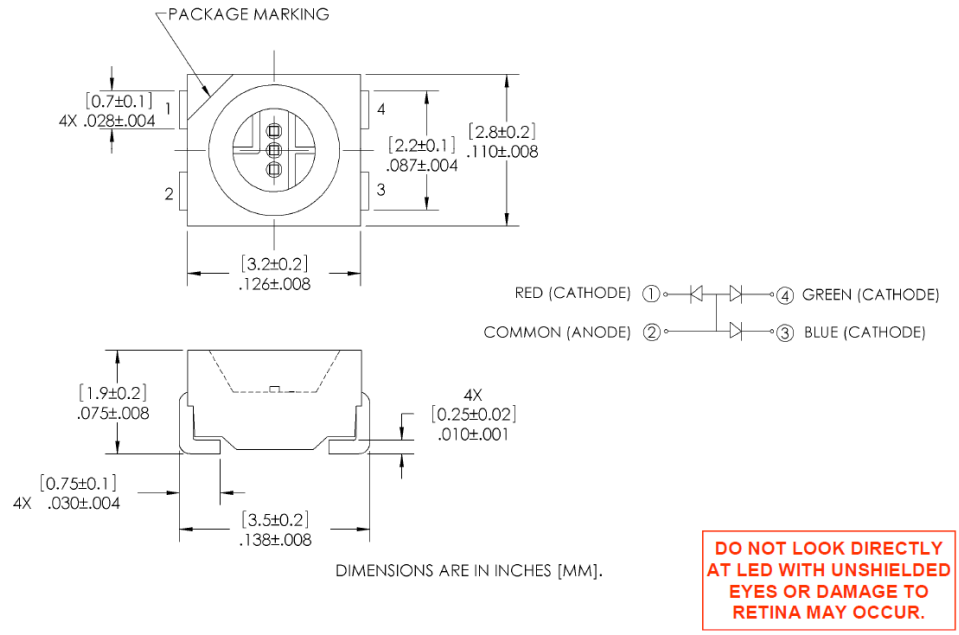

RoHS

5a
Moisture

ATTENTION
OBSERVE PRECAUTIONS FOR ELECTROSTATIC SENSITIVE DEVICES

DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

© TT Electronics plc

Downloaded from Arrow.com.

Electrical Specifications

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

PARAMETER	RATING			UNIT
	R	G	B	
Storage Temperature	-40 ~ +100			° C
Operating Temperature	-40 ~ +100			° C
Reverse Voltage	5			V
Continuous Forward Current (1 chip on)	50	25	25	mA
Peak Forward Current (10% Duty Cycle, PW ≤ 100 µsec, 1 chip on)	200	100	100	mA
Power Dissipation	130	100	100	mW
Junction Temperature	110	110	110	° C
Junction/ ambient (1 chip on)	450	400	450	° C/W
Junction/ ambient (3 chip on)	650	580	680	° C/W
Junction/ solder point (1 chip on)	300	280	300	° C/W
Junction/ solder point (3 chip on)	450	430	480	° C/W
Electrostatic Discharge Classification (JEDEC-JESD22-A114F)				Class 1C
Moisture Sensitivity Level (IPC/JEDEC J-STD-020C)				5a / 24 Hrs

Electrical Characteristics (T_A = 25° C unless otherwise noted)

SYMBOL	PARAMETER		VALUES			UNITS	TEST CONDITIONS
			R	G	B		
I_V	Luminous Intensity	Min	450	710	224	mcd	I_F = 20 mA
		Typ	635	1000	335		
V_F	Forward Voltage	Typ	2.0	3.2	3.2	V	I_F = 20 mA
		Max	2.6	4.0	4.0		
I_R	Reverse Current		10	10	10	µA	V_R = 5 V
λ_D	Dominant Wavelength		619-624	520-540	460-475	nm	I_F = 20 mA
2 Θ½	50% Power Angle		120	120	120	deg	I_F = 20 mA
Δλ	Spectral Radiation Bandwidth		24	38	28	nm	I_F = 20 mA

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc


Downloaded from Arrow.com.

Performance


Typical Electro-Optical Characteristics Curves

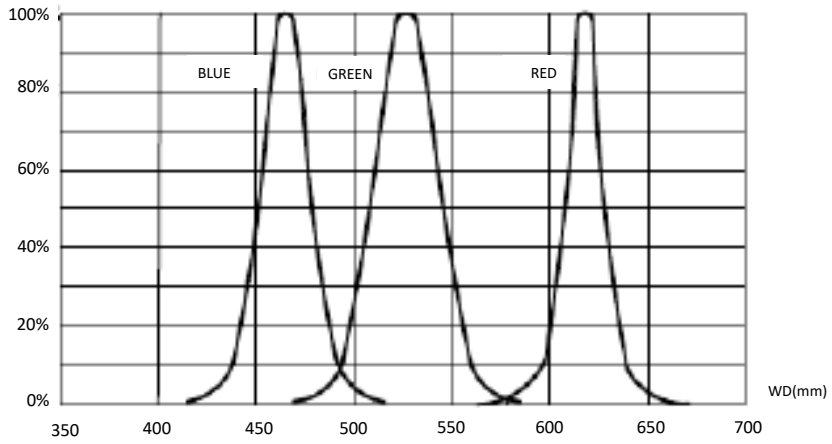

Relative Intensity vs Dominant Wavelength

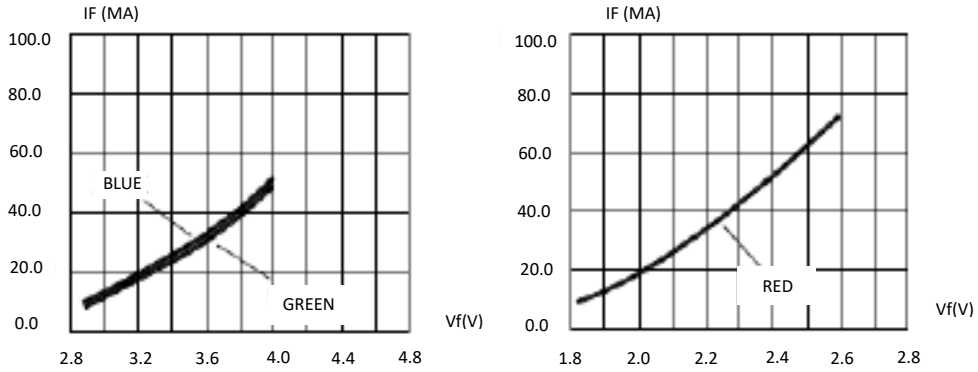

Forward Current vs Forward Voltage

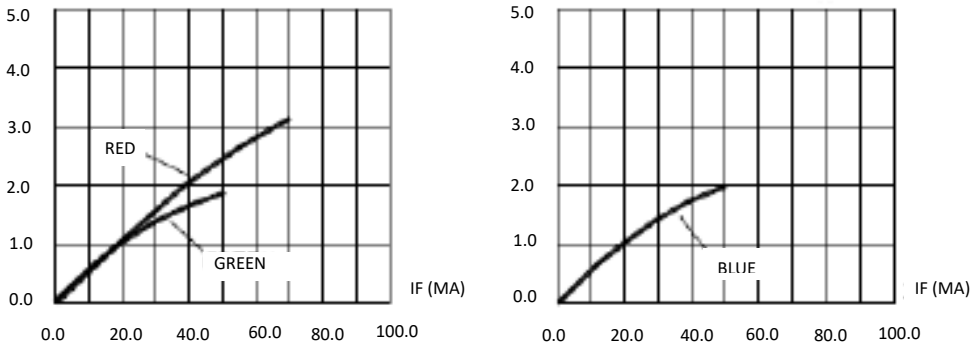

Relative Luminous Intensity vs Forward Current

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc


Downloaded from Arrow.com.

Performance


Typical Electro-Optical Characteristics Curves

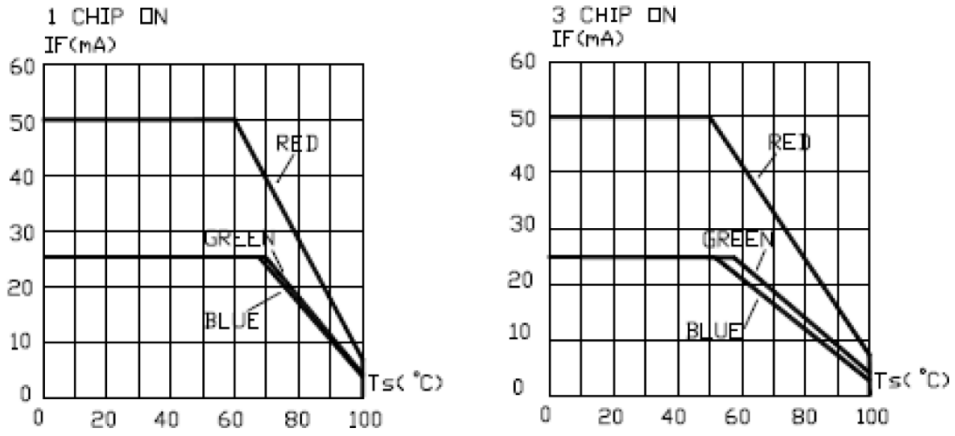

Maximum Forward DC Current vs Solder Point Temperature

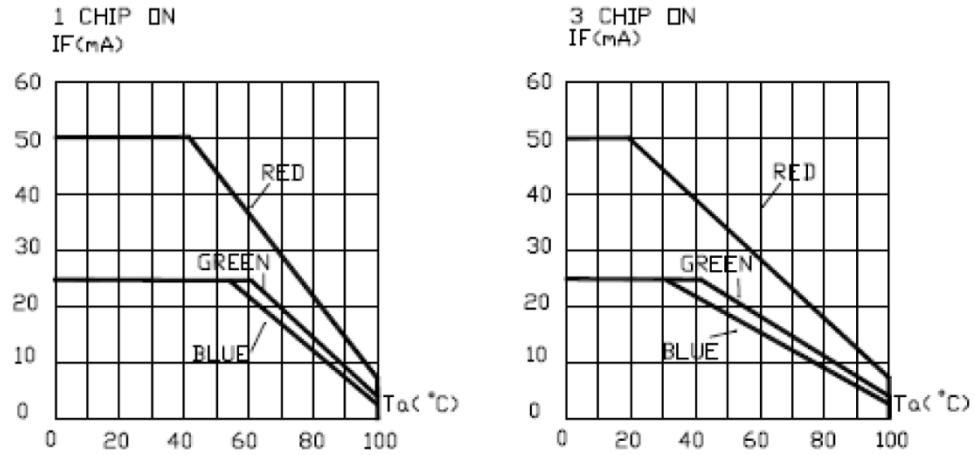

Maximum Forward DC Current vs Ambient Temperature

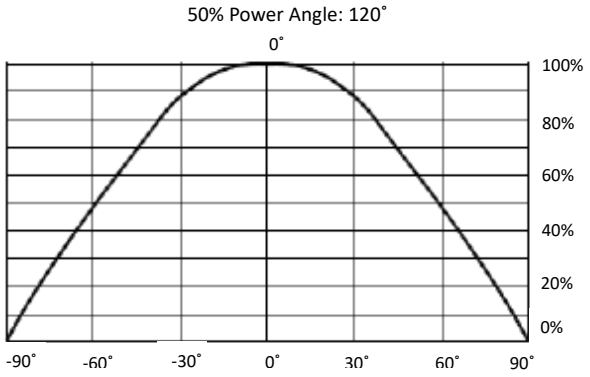

Far Field Pattern

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT Electronics plc

Downloaded from Arrow.com.

Reflow Solder Profile

Manual soldering by soldering iron

- The use of a soldering iron of less than 25W is recommended. The temperature of the iron must be kept at below 315° C with soldering time within 2 seconds.
- The epoxy resin of the SMD LED should not contact the tip of the soldering iron.
- No mechanical stress should be exerted on the resin portion of the SMD LED during soldering.
- Handling of the SMD LED should be done when the package has been cooled down to below 40° C or less. This is to prevent LED failures due to thermal-mechanical stress during handling.
- The temperature (top surface of the SMD LED) profile is as below:

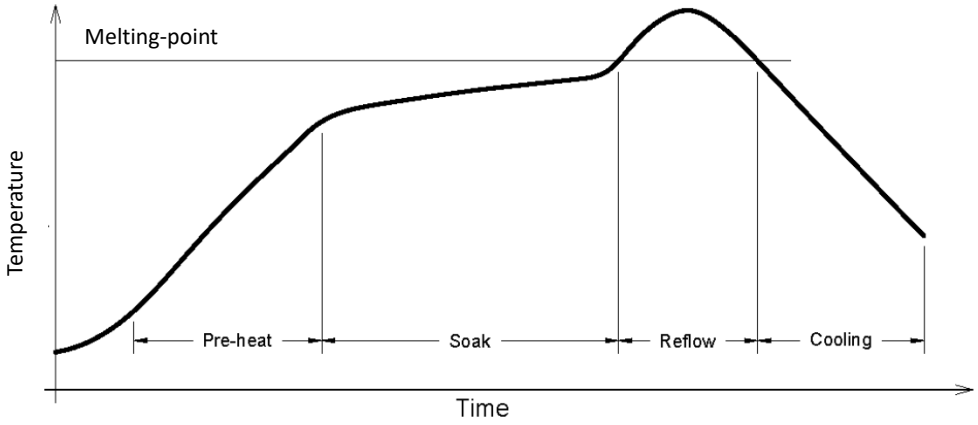

Solder = Lead-Free
Average ramp-up rate = 4°C / sec. max
Preheat temperature: 150 - 200°C
Preheat time: 120 sec. max.
Ramp-down rate = 6°C / sec. max.
Peak temperature = 250°C max.
Time within 5°C of actual peak temperature = 10 sec. max
Duration above 217°C is 60 sec. max


OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT Electronics plc

Downloaded from Arrow.com.


Reel Dimensions: 7-inch reel

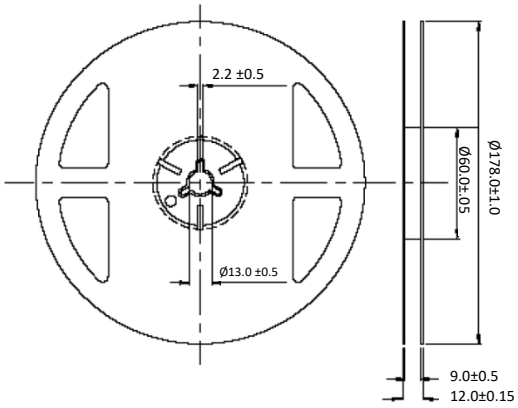

Carrier Tape Dimensions: Loaded quantity 2,000 pieces per reel

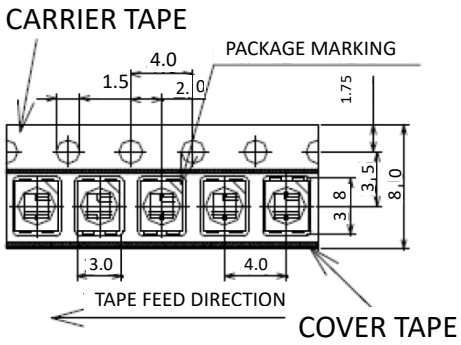

Moisture Resistant Packaging

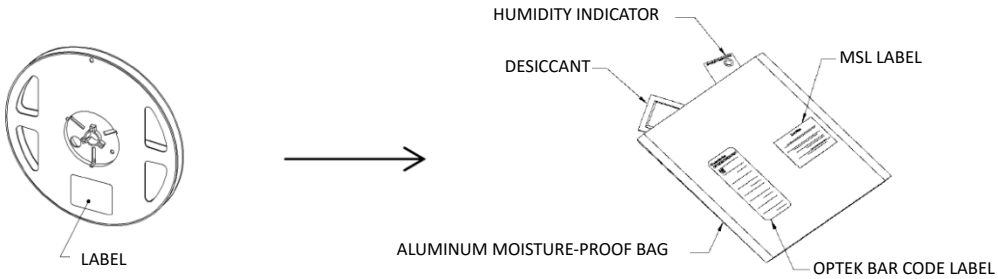

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

Downloaded from Arrow.com.