

Type TYC Series


Key Features

- Choice of Dielectrics (NPO, X7R, X5R, Y5V)
- 0402 to 1812 sizes as standard
- Other sizes available. 0201 available soon
- 6.3V to 50V in standard range
- Voltage ratings to 3kV on selected products
- Range of tolerances available
- RoHS Compliant
- Excellent thermal stability
- Low dissipation factor



Multilayer ceramic capacitors (MLCC) are manufactured by suspending ceramic powders in liquid and casting into a thin green sheet from 0.0mm in thickness to 5mm or thinner. Metal electrodes are sieved printed onto green sheets, which are later stacked to form a laminated structure. The metal electrodes are arranged so that the termination alternates from one edge to another of the capacitor. Upon sintering at high temperature the part becomes a monolithic block, which can provide an extremely high capacitance in small mechanical volumes. Finally, the termination electrodes are formed by composite of outer metal-glass electrode and followed by a barrier layer and pure-tin plating to permit MLCC to be soldered directly onto printed circuit board.

Structure

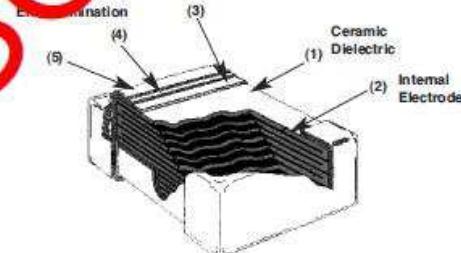

Class 1

No	Specifications	Material
1	Ceramic dielectric	Barium titanate base
2	Internal Electrode	Pb, PdAg
3	Inner Layer	Ag
4	End Terminal	Ni
5	Outer Layer	Sn

Class 2

No	Specifications	Material
1	Ceramic dielectric	Barium titanate base
2	Internal Electrode	Pb, PbAg
3	Inner Layer	Ag
4	End Terminal	Ni
5	Outer Layer	Sn

Type TYC Series

Capacitance & Voltage (NPO)

EIA Code	Size	0402					0603					0805					1206					1210					1812				
		VDCW	10V	16V	25V	50V	10V	16V	25V	50V	10V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V	10V	16V	25V	50V				
0R5	0.5pF	N	N	N	N	N	S	S	S	S	A	A	A	A	A																
1R0	1	N	N	N	N	N	S	S	S	S	A	A	A	A	A																
1R2	1.2	N	N	N	N	N	S	S	S	S	A	A	A	A	A																
1R5	1.5	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
1R8	1.8	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
2R2	2.2	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
2R7	2.7	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
3R3	3.3	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
3R9	3.9	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
4R7	4.7	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
5R6	5.6	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
6R8	6.8	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
8R2	8.2	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
100	10pF	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
120	12	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
150	15	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
180	18	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B												
220	22	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
270	27	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
330	33	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
390	39	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
470	47	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
560	56	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
680	68	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
820	82	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
101	100pF	F	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
121	120	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
151	150	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
181	180	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
221	220	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
271	270	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
331	330	N	N	N	N	N	S	S	S	S	A	A	A	A	A	B	B	B	B	C	C	C	C								
391	390	N	N				S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C								
471	470	N	N				S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C								
561	560						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C								
681	680						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C								
821	820						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C								
102	1000pF						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
122	1200						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
152	1500						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
182	1800						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
222	2200						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
272	2700						S	S	S	S	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
332	3300						S	S	S	S	D	D	D	D	D	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
392	3900										D	D	D	D	D	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
472	4700										D	D	D	D	D	B	B	B	B	C	C	C	C	D	D	D	D	D	D		
562	5600										D	D				B	B	B	B	C	C	C	C	D	D	D	D	D	D		
682	6800										D	D				C	C	C	C					D	D	D	D	D	D		
822	8200										D	D				C	C	C	C					D	D	D	D	D	D		
103	0.01μF										D	D			D'									D	D	D	D	D	D		
123	0.012																								D	D	D	D	D	D	
153	0.015																								D	D	D	D	D	D	
183	0.018																								D	D	D	D	D	D	
223	0.022																								D	D	D	D	D	D	
273	0.027																								D	D	D	D	D	D	
333	0.033																								D	D	D	D	D	D	
393	0.039																								D	D	D	D	D	D	
473	0.047																								D	D	D	D	D	D	
563	0.056																								D	D	D	D	D	D	
683	0.068																								D	D	D	D	D	D	
823	0.082																								D	D	D	D	D	D	
104	0.1μF																								D	D	D	D	D	D	

1773291 Rev. D 08/2018

Dimensions in
millimetres unless
otherwise specified

Dimensions Shown for
reference purposes only.
Specifications subject to
change

For Email, phone or live chat,
go to: www.te.com/help

Type TYC Series

Capacitance & Voltage (Hi-Voltage NPO)

EA Code	Size VDCW	0603					0805					1206					1210					1808					1812							
		100	100	200	250	500	100	200	250	500	1000	2000	100	200	250	500	1000	2000	3000	1000	2000	3000	1000	2000	3000	100	200	250	500	1000	2000	3000		
0R5	0.5pF	S	A	A	A	A																												
1R0	1	S	A	A	A	A																												
1R2	1.2	S	A	A	A	A																												
1R5	1.5	S	A	A	A	A	B	B	B	B	B	B																						
1R8	1.8	S	A	A	A	A	B	B	B	B	B	B																						
2R2	2.2	S	A	A	A	A	B	B	B	B	B	B																						
2R7	2.7	S	A	A	A	A	B	B	B	B	B	B																						
3R3	3.3	S	A	A	A	A	B	B	B	B	B	B																						
3R9	3.9	S	A	A	A	A	B	B	B	B	B	B																						
4R7	4.7	S	A	A	A	A	B	B	B	B	B	B																						
5R6	5.6	S	A	A	A	A	B	B	B	B	B	B																						
6R8	6.8	S	A	A	A	A	B	B	B	B	B	B																						
8R2	8.2	S	A	A	A	A	B	B	B	B	B	B																						
100	10pF	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
120	12	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
150	15	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
180	18	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
220	22	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
270	27	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
330	33	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
390	39	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
470	47	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
560	56	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
680	68	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
820	82	S	A	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
101	100pF	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
121	120	S	A	A	A	D	B	B	B	B	D	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
151	150	S	A	B	B	D	B	B	B	C	D	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D					
181	180	S	A	B	B	D	B	B	B	C	G	C	C	C	C	C	C	D	D	K	D	D	D	D	D	D	D	D	D					
221	220	S	A	D	D	B	B	B	D	G	C	C	C	C	C	C	C	D	D	K	D	D	D	D	D	D	D	D	D					
271	270	S	A	D	D	B	B	C	D	C	C	C	C	C	C	C	C	D	D	K	D	D	D	D	D	D	K	D	D	D				
331	330	S	A	D	D	B	B	C	B	C	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	K	D					
391	390	S	B	D	D	B	B	B	C	C	C	C	C	C	C	C	C	D	K	D	D	D	D	D	D	D	K	D	K					
471	470	S	B	D	B	C	C	C	C	C	C	C	C	C	C	C	C	D	K	D	D	D	D	D	D	D	D	K	D					
561	560	S	B	D	B	C	C	C	C	C	C	C	C	C	C	C	C	K	K	D	D	D	D	D	D	D	D	D	D					
681	680	B	D	B	C	C	C	C	C	C	C	C	C	C	C	C	C	K	K	D	D	D	D	D	D	D	K	D	K					
821	820	B	D	B	C	D	D	C	C	C	C	C	C	C	C	C	C	K	K	D	D	D	D	D	D	D	K	D	K					
102	1000pF	B	B	C																														
122	1200	B	B	C																														
152	1500	B	B	C																														
182	1800	B	B	C																														
222	2200	B	B	D																														
272	2700	D	B																															
332	3300	D	B																															
392	3900	D	B																															
472	4700	B																																
562	5600	B																																
682	6800	C																																
822	8200	C																																
103	0.01pF																																	
123	0.012																																	
153	0.015																																	
183	0.018																																	
223	0.022																																	
273	0.027																																	
333	0.033pF																																	

Size Unit: Inch (mm) 0402 (1005)	0603 (1608)	0805 (2012)	1206 (3216)	1210 (3225)	1808 (4520)	1812 (4532)
A= 0.60±0.10 mm	—	—	Paper 4Kp/reel	—	—	—
B= 0.80±0.10 mm	—	—	Paper 4Kp/reel	Paper 4Kp/reel	—	—
C= 0.95±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	—
D= 1.25±0.10 mm	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 2Kp/reel	Plastic 1Kp/reel
E= 1.60±0.20 mm	—	—	—	Plastic 2Kp/reel	Plastic 2Kp/reel	—
F= 0.80±0.07 mm	—	Paper 4Kp/reel	—	—	—	—
N= 0.50±0.05 mm	Paper 10Kp/reel	—	—	—	Plastic 2Kp/reel	Plastic 1

Type TYC Series

Capacitance & Voltage (X7R/X5R)

EIA Code	Size	0402				0603				0805				1206				1210				1812					
		VDCW	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	
101	100pF	N	N	N	N	N	S	S	S	S	S	B	B	B	B												
121	120	N	N	N	N	N	S	S	S	S	S	B	B	B	B												
151	150	N	N	N	N	N	S	S	S	S	S	B	B	B	B												
181	180	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
221	220	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
271	270	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
331	330	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
391	390	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
471	470	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
561	560	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
681	680	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
821	820	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
102	1000pF	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
122	1200	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
152	1500	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
182	1800	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
222	2200	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
272	2700	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
332	3300	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
392	3900	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
472	4700	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
562	5600	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
682	6800	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
822	8200	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
103	0.01 μ F	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
123	0.012	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
153	0.015	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
183	0.018	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
223	0.022	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
273	0.027	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
333	0.030	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
393	0.039	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
473	0.047	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
563	0.056	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
683	0.068	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
823	0.082	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
104	0.1 μ F	N	N	N	N	N	S	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	B	B	B		
124	0.12						S	S	S	S	S	B	B	D	D	B	B	B	B	B	B	B	B	B	B		
154	0.15						S	S	S	S	S	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
184	0.18						S	S	S	S	S	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
224	0.22						S	S	S	S	S	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
274	0.27						S	S	S	S	S	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
334	0.33						S'	S'	S'	S'	S'	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
394	0.39						S'	S'	S'	S'	S'	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
474	0.47						S'	S'	S'	S'	S'	D	D	D	D	C	C	C	C	C	C	C	C	C	C		
564	0.56						S	S	S	S	S	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
684	0.68						S	S	S	S	S	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
824	0.82						S	S	S	S	S	D	D	D	D	D	D	D	D	D	D	D	D	D	D		
105	1 μ F						S'	S'	S'	S'	S'	D	D	D	D	D	D	G	G	G	G	G	G	G	G	G	
225	2.2						S'	S'	S'	S'	S'	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
335	3.3						S'	S'	S'	S'	S'	D	D	D	D	G	G	G	G	K	K	K	K	K	K	K	
475	4.7						S'	S'	S'	S'	S'	D	D	D	D	G	G	G	G	K	K	K	K	K	K	K	
685	6.8																										
106	10 μ F																										
226	22 μ F																										
107	100 μ F																										

Size Unit: Inch (mm) 0402 (1005)	0603 (1608)	0805 (2012)	1206 (3216)	1210 (3225)	1808 (4520)	1812 (4532)
A= 0.60±0.10 mm	—	—	Paper 4Kp/reel	—	—	—
B= 0.80±0.10 mm	—	—	Paper 4Kp/reel	Paper 4Kp/reel	—	—
C= 0.95±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	—
D= 1.25±0.10 mm	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 2Kp/reel	Plastic 1Kp/reel
G= 1.60±0.20 mm	—	—	—	Plastic 2Kp/reel	Plastic 2Kp/reel	—
S= 0.80±0.07 mm	—	Paper 4Kp/reel	—	—	—	—
N= 0.50±0.05 mm	Paper 10Kp/reel	—	—	—	—	—
K= 2.00±0.20 mm	—	—	—	Plastic 2Kp/reel	Plastic 1Kp/reel	Plastic 1Kp/reel
M= 2.50±0.30 mm	—	—	—	Plastic 1Kp/reel	—	Plastic 1Kp/reel
U= 2.80±0.30 mm	—	—	—	—	—	Plastic 0.5Kp/reel

Type TYC Series

Capacitance & Voltage (Hi-Voltage X7R)

EIA Code	Size	0603				0805				1206				1210				1808				1812					
		100	100	200	250	500	100	200	250	500	1000	1500	2000	100	200	250	500	1000	1500	2000	100	200	250	500	1000	2000	3000
101	100pF	S	B	B ^A	B ^A	B ^A																					
121	120	S	B	B ^A	B ^A	B ^A																					
151	150	S	B	B ^A																							
181	180	S	B	B ^A																							
221	220	S	B	B ^A																							
271	270	S	B	B ^A																							
331	330	S	B	B ^A																							
391	390	S	B	B ^A	C ^A																						
471	470	S	B	B ^A	C ^A																						
561	560	S	B	B ^A	C ^A																						
681	680	S	B	B ^A	C ^A																						
821	820	S	B	B ^A	G ^A																						
102	1000pF	S	B	B ^A	G ^A	C ^A																					
122	1200	S	B	B ^A	G ^A	C ^A																					
152	1500	S	B	B ^A	C ^A	G ^A	C ^A																				
182	1800	S	B	B ^A	C ^A	G ^A	C ^A																				
222	2200	S	B	B ^A	D ^A	G ^A	C ^A																				
272	2700	S	B	B ^A	G ^A		C ^A																				
332	3300	S	B	B ^A	G ^A		C ^A																				
392	3900	S	B	B ^A	G ^A		C ^A																				
472	4700	S	B	B ^A			C ^A																				
562	5600	S	B	D ^A	D ^A	B	B ^A			C ^A																	
682	6800	S	B	D ^A	D ^A	B	B ^A			C ^A																	
822	8200	S	B	D ^A	D ^A	B	B ^A	C ^A		C	C ^A																
103	0.01μF	S	B	D ^A	D ^A	B	B ^A	C ^A		C	C ^A																
123	0.012	B				B	B ^A			C	C ^A																
153	0.015	B				B	C ^A			C	C ^A																
183	0.018	B				B	C ^A			C	C ^A																
223	0.022	B				B	C ^A			C	C ^A																
273	0.027	D				B	C ^A			C	C ^A																
333	0.033	D				B	G ^A			C	C ^A																
393	0.039					B	G ^A			C	C ^A																
473	0.047					B	G ^A			C	D ^A																
563	0.056					B							C	D ^A	K ^A												
683	0.068					B																				K ^A	
823	0.082					D							C													D ^A	
104	0.1μF					D							C													D ^A	
124	0.12												C													D ^A	
154	0.15												D													K ^A	
184	0.18												D													K ^A	
224	0.22												D													K ^A	
274	0.27																									D	
334	0.33																									D	
394	0.39																									D	
474	0.47																									K	
564	0.56																									K	
684	0.68																									K	
824	0.82																										
105	1μF																										

Size Unit: Inch (mm)	0402 (1005)	0603 (1608)	0805 (2012)	1206 (3216)	1210 (3225)	1808 (4520)	1812 (4532)
A= 0.60±0.10 mm	—	—	Paper 4Kp/reel	—	—	—	—
B= 0.80±0.10 mm	—	—	Paper 4Kp/reel	Paper 4Kp/reel	—	—	—
C= 0.95±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	—	—
D= 1.25±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 2Kp/reel	Plastic 1Kp/reel</

Type TYC Series

Capacitance & Voltage (Y5V)

EIA Code	Size VDCW	0402					0603					0805					1206					1210					1812				
		6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	10V	16V	25V	35V	50V	10V	16V	25V	50V	10V	16V	25V	50V		
102	1000pF																														
122	1200																														
152	1500																														
182	1800																														
222	2200																														
272	2700																														
332	3300																														
392	3900																														
472	4700																														
562	5600																														
682	6800																														
822	8200																														
103	0.01 μ F	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
123	0.012	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
153	0.015	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
183	0.018	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
223	0.022	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
273	0.027	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
333	0.033	N	N	N	N		S	S	S	S		A	A	A	A	B	B	B	B	B	B										
393	0.039	N	N	N			S	S	S	S		A	A	A	A	B	B	B	B	B	B										
473	0.047	N	N	N			S	S	S	S		A	A	A	A	B	B	B	B	B	B										
563	0.056	N	N				S	S	S	S		A	A	A	A	B	B	B	B	B	B										
683	0.068	N	N				S	S	S	S		A	A	A	A	B	B	B	B	B	B										
823	0.082	N	N				S	S	S	S		A	A	A	A	B	B	B	B	B	B										
104	0.1 μ F	N	N				S	S	S	S		A	A	A	A	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
154	0.15	N					S	S	S	S		A	A	A	A	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
224	0.22	N					S	S	S	S		A	A	A	A	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
334	0.33	N	N				S	S	S			B	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
474	0.47	N	N				S	S	S			B	B	B	B	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
684	0.68						S					B	B	D	D	B	B	B	B	B	B	C	C	C	C	D	D	D	D		
105	1 μ F	N					S	S				B	B	D	D	C	C	C	C	C	C	C	C	C	C	D	D	D	D		
155	1.5						S					D	L			C	C	C	C	C	C	C	C	C	C	D	D	D	D		
225	2.2						S					D	D			C	C	C	D	C	C	C	C	C	C	D	D	D	D		
335	3.3						S					D				D	D	D	C	C	C	C	C	C	D	D	D	D			
475	4.7						S					D	D	D	D	D	D	D	C	C	D	G	D	D	D	D	D	D			
685	6.8											D	D			D	D	D	C	C	D	D	D	D	D	D	D	D			
106	10 μ F											D	D			D	D	D	D	D	G	D	D	D	D	D	D	D			
226	22 μ F															G'			K	K											
476	47 μ F																	K													

(1) [D]: The thickness spec. of said items is special defined on 2.0mm for 0805 and 1.15±0.15mm for 1206.

(2) [G]: The thickness spec. of said items is special defined on 1.60±0.10mm.

Size Unit: Inch (mm)	0402 (1005)	0603 (1008)	0805 (2012)	1206 (3216)	1210 (3225)	1808 (4520)	1812 (4532)
A= 0.60±0.10 mm	—		Paper 4Kp/reel	—	—	—	—
B= 0.80±0.10 mm	—		Paper 4Kp/reel	Paper 4Kp/reel	—	—	—
C= 0.95±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	—	—
D= 1.25±0.10 mm	—	—	—	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 2Kp/reel	Plastic 1Kp/reel
G= 1.60±0.20 mm	—	—	—	Plastic 2Kp/reel	Plastic 2Kp/reel	—	—
S= 0.80±0.07 mm	—	Paper 4Kp/reel	—	—	—	—	—
N= 0.50±0.05 mm	Paper 10Kp/reel	—	—	—	—	—	—
K= 2.00±0.20 mm	—	—	—	—	Plastic 2Kp/reel	Plastic 1Kp/reel	Plastic 1Kp/reel

Type TYC Series

Capacitance & Voltage (Hi-Voltage Y5V)


EIA	Size	0805			1206			1210			1812		
		VDCW	100	200	250	100	200	250	100	200	250	100	200
103	0.01 μ F	B	B	B	B	B	B	C	C	C	D	D	D
153	0.015	B	B	B	B	B	B	C	C	C	D	D	D
223	0.022	B	B	B	B	B	B	C	C	C	D	D	D
333	0.033	B	B	B	B	B	B	C	C	C	D	D	D
473	0.047	B	B	B	B	B	B	C	C	C	D	D	D
683	0.068	B	B	B	B	B	B	C	C	C	D	D	D
104	0.1 μ F	B		B	B	B	B	C	C	C	D	D	D
154	0.15			C	C	C	C	C	C	C	D	D	D
224	0.22			C			C			D	D	D	D
334	0.33						C			D	D	D	D
474	0.47									D	D	D	D
684	0.68									D	D	D	D
105	1 μ F									D			

Size Unit: Inch (mm)	0805 (2012)	1206 (3216)	1210 (3225)	1812 (4532)
A= 0.60±0.10 mm	Paper 4Kp/reel	—	—	—
B= 0.80±0.10 mm	Paper 4Kp/reel	Paper 4Kp/reel	—	—
C= 0.95±0.10 mm	—	Plastic 3Kp/reel	Plastic 3Kp/reel	—
D= 1.25±0.10 mm	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 3Kp/reel	Plastic 1Kp/reel
G= 1.60±0.20 mm	—	Plastic 2Kp/reel	—	—
S= 0.80±0.07 mm	—	—	—	—
N= 0.50±0.05 mm	—	—	—	—
K= 2.00±0.20 mm	—	—	—	Plastic 1Kp/reel
M= 2.50±0.30 mm	—	—	—	—

Packaging

Chip Size	Paper Tape			Plastic Tape			Chip Thickness
	Width (reel)	Thickness	Unit/Reel	Width (reel)	Thickness	Unit/Reel	
0402	8mm (7")	N	10Kp/Reel				A=0.50-0.70
	8mm (7")	S	4Kp/Reel				B=0.85±0.05/-0.15
0603	8mm (10")	S	10Kp/Reel				C=1.00±0.05/-0.13
	8mm (13")	S	5Kp/Reel				D=1.20±0.15
0805	8mm (7")	A, B	4Kp/Reel	8mm (7")	C, D	3Kp/Reel	S=0.80±0.07
	8mm (10")	A, B	10Kp/Reel	8mm (10")	C, D	3Kp/Reel	H=0.50-0.60
1206	8mm (10")	A, B	15Kp/Reel	8mm (13")	C, D	3Kp/Reel	E=0.65-0.75
	8mm (13")	A, B	10Kp/Reel	8mm (10")	C, D	3Kp/Reel	N=0.50±0.05
1210	8mm (10")	A, B	15Kp/Reel	8mm (13")	C, D	3Kp/Reel	F=1.40±0.05/-0.15
	8mm (13")	A, B	8mm (7")	F, G	3Kp/Reel		G=1.60±0.05/-0.15
1808	8mm (10")	A, B	10Kp/Reel	8mm (7")	K	3Kp/Reel	K=2.00±0.10
	8mm (13")	A, B	12mm (7")	C, D	3Kp/Reel		
1812	8mm (10")	A, B	12mm (7")	F	3Kp/Reel		
	8mm (13")	A, B	12mm (7")	C, G	3Kp/Reel		
				12mm (7")	K	3Kp/Reel	
				12mm (7")	D	3Kp/Reel	


Dimensions

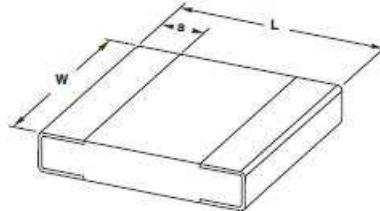


SIZE CODE	L	W	A
0402	1.00±0.05	0.50±0.05	0.25±0.05/-0.10
0603	1.60±0.10	0.80±0.07	0.40±0.15
0805	2.00±0.15	1.25±0.10	0.50±0.20
1206	3.20±0.15	1.60±0.15	0.60±0.20
1210	3.20±0.30	2.50±0.20	0.75±0.25
1808	4.50±0.40	2.03±0.25	0.75±0.25
1812	4.50±0.40	3.20±0.30	0.75±0.25

Type TYC Series

Packaging (continued)

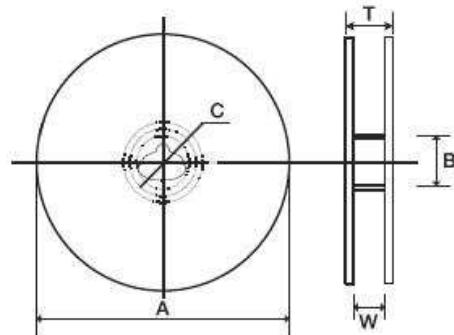

ϕA	ϕB	ϕC	W
178 ± 1 (7")	60.5 ± 1	3.0 ± 1	9.0 ± 1
250 ± 1 (10")	80 ± 1		13.5 ± 1
330 ± 1 (13")	62.5 ± 1		9.0 ± 1
	100 ± 1		9.0 ± 1

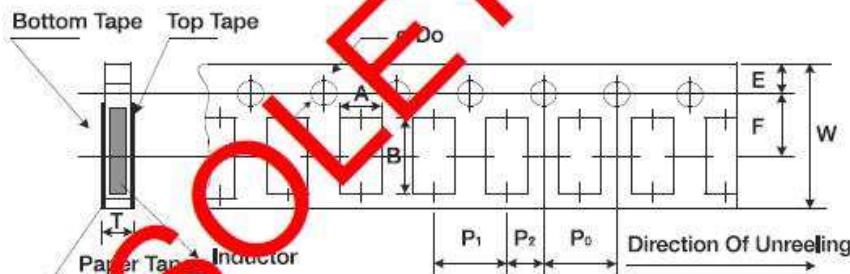

Type	A	B	W	ϕD_0	E	F	P_0	P_1	P_2	T
0402	0.7 ± 0.05	1.23 ± 0.05								0.6 ± 0.05
0603	1.0 ± 0.05	1.84 ± 0.1								
0805	1.5 ± 0.2	2.35 ± 0.2	8.0 ± 0.32	1.55 ± 0.05	1.70 ± 0.1	3.50 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	<1.0
1206	2.0 ± 0.2	3.5 ± 0.2								

How to Order

TYC	0201	A	101	B	C	T
Common Part	Size	Dielectric	Capacitance Code	Tolerance	Voltage	Packaging
TYC - Multilayer Ceramic Chip Capacitor	0201	A = NPO	101 - 100pF	B = $0.1 \mu\text{F}$ C = $0.25 \mu\text{F}$ D = $0.5 \mu\text{F}$ F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$ Z = $\pm 80\% / -20\%$	C = 6.3V D = 10V E = 16V F = 25V G = 50V H = 100V J = 200V L = 500V P = 1KV Q = 2KV R = 3KV S = 4KV	T = Paper (7") P = Plastic (7")
	0402	B = X7R	102 - 1000pF			
	0603	C = X5R	103 - 0.01uF			
	0805	D = Y5V				
	1206					

1773291 Rev. D 08/2018

Dimensions in
millimetres unless
otherwise specifiedDimensions Shown for
reference purposes only.
Specifications subject to
changeFor Email, phone or live chat,
go to: www.te.com/help