

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

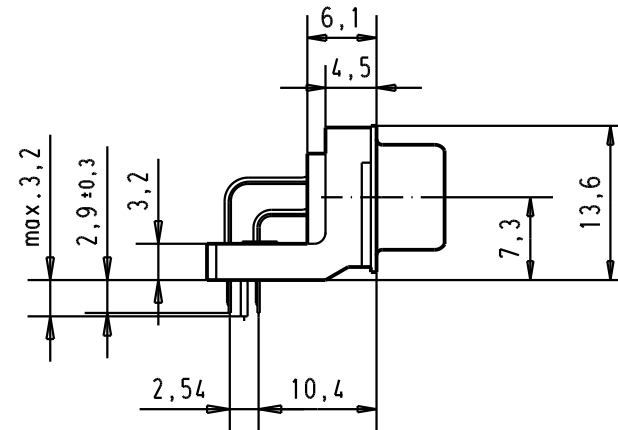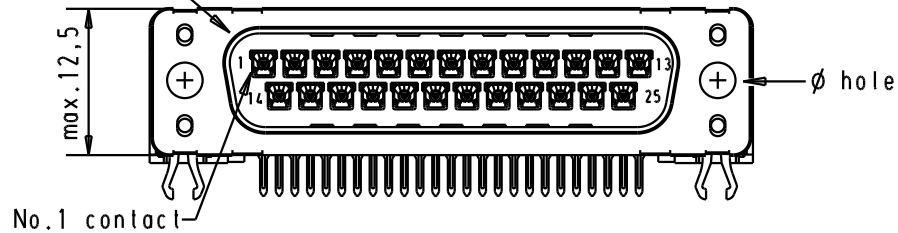


PCB layout hole
component side

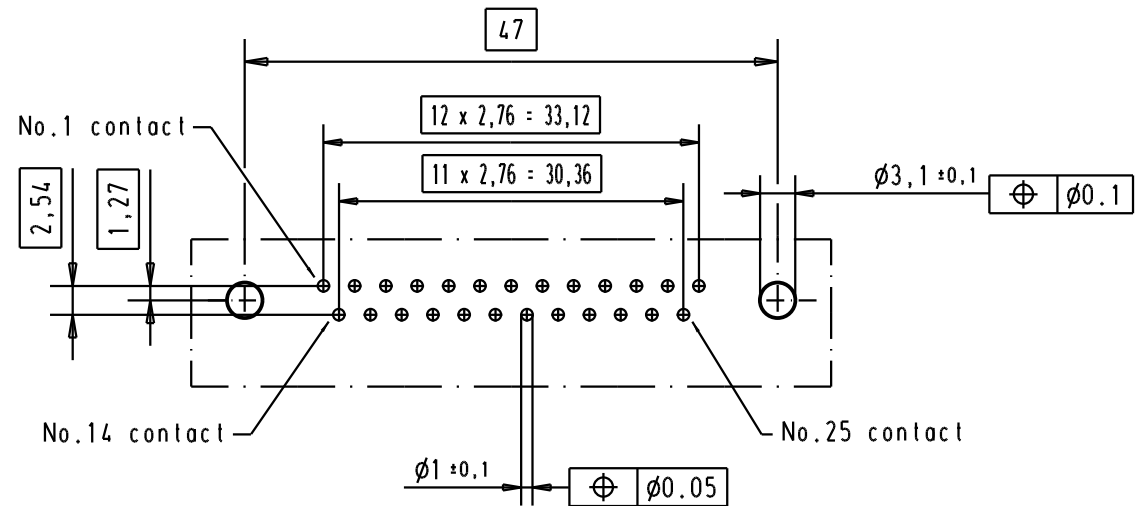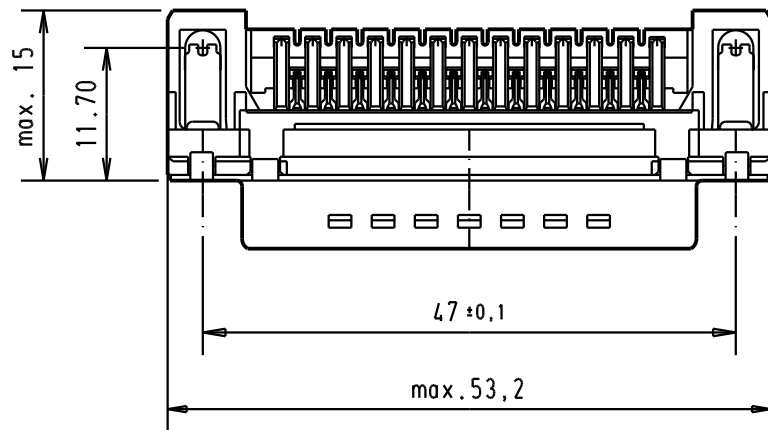

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

							Dat.	Name			
							Detail.	15/dec/00	ALSPACE		
							Insp.				
							Stand.				
09 65 362 3810	3.1 ± 0.1	1	31892	22/04/04	JH						
09 65 362 6810	3.1 ± 0.1	2	29689	03/07/01	AA						
09 65 362 7810	3.1 ± 0.1	3	27960	15/dec/00	ALSPACE						
Part number	ø hole	Performance level	Mod.	Dat.	Name						



All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, standard angle,
25 poles, with solder pin,
hole and grounding board lock.

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0965362x81x

Blatt/ Page

4

Sub.