Fair-Rite Products Corp.
Your Signal Solution®

Oval Clip-It Core (0375184751)

Part Number: 0375184751

75 OVAL CABLE CORE ASSEMBLY

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade

The B dimension is the core inside diameter.

Weight: 65 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	30.43	+/- 1.0	1.20	_
B	19.20	_	0.75 min	
C	29.90	+/- 1.0	1.18	_
D	23.0	+/- 1.0	0.91	_
E	9.2	_	0.36 min	

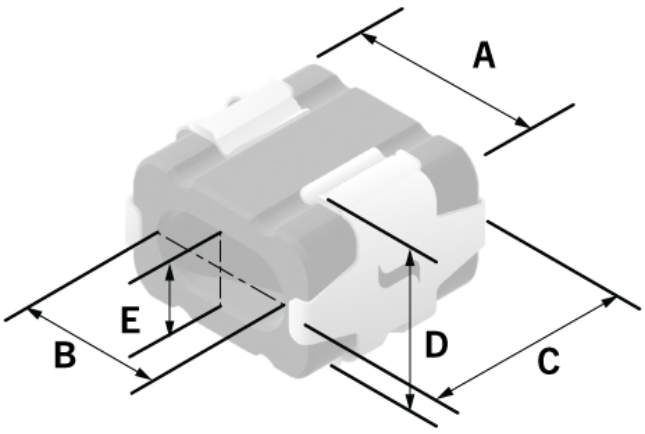


Chart Legend
+ Test frequency
•For solid cable cores, see Round Cable EMI Suppression Cores

Downloaded from Arrow.com.

Typical Impedance (Ω)	
500 kHz	21 Min
1 MHz	38 Min
5 MHz	29 Min

Electrical Properties	
Ae(cm^2)	1.27
Σl/A(cm^{-1})	0.0583
l_e(cm)	7.41
V_e(cm^3)	9.410

Round cable snap-it assemblies are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impendance (Ω)	
0.5 MHz	21
1 MHz^+	38
5 MHz^+	29

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Downloaded from Arrow.com.