DATE	DESCRIPTION	REV.
6.27.19	CHANGE AS PER ECN 19-060 ROTATE TEST PINT IN THE POCKET FOR 90°	A
7.29.19	CHANGE AS PER ECN 19-062 INSULATION MAT'L WAS LCP 30% GLASS FILLED, UL 94V-0	B

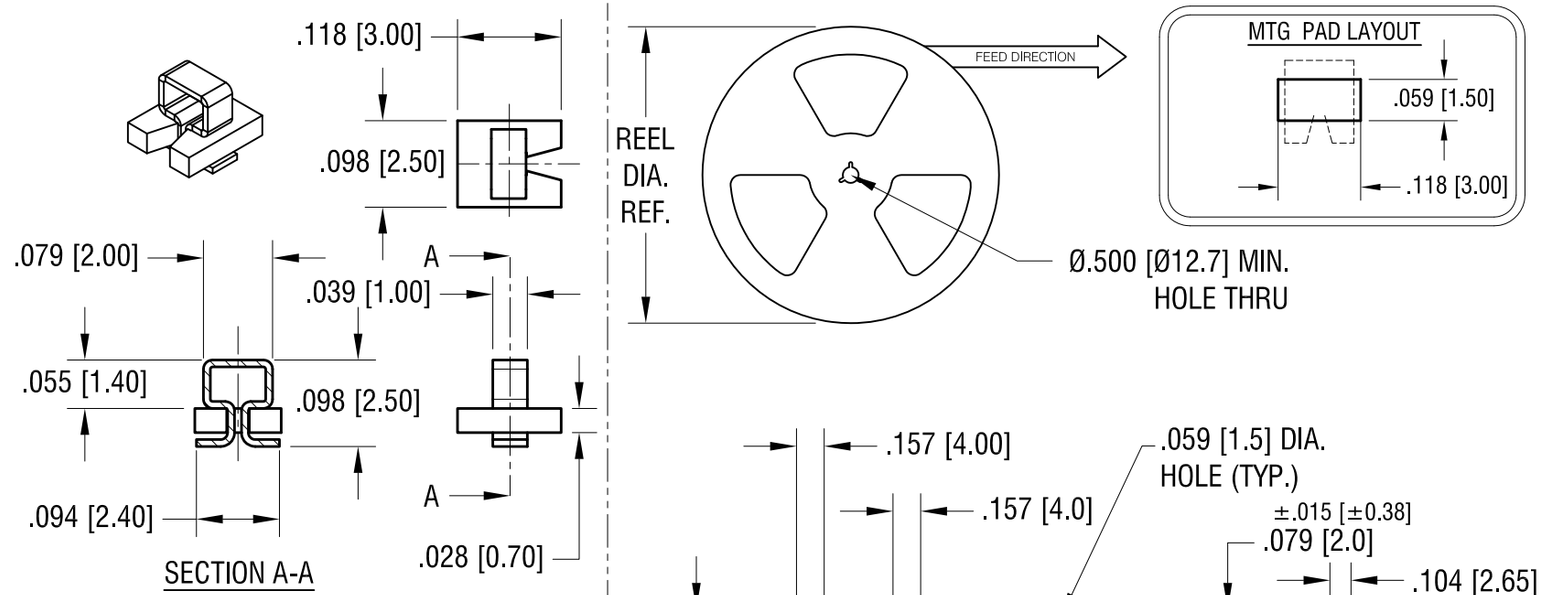

PART NO.	BASE COLOR	PART NO.	BASE COLOR
5190TR	RED	5195TR	BROWN
5191TR	BLACK	5196TR	GREEN
5192TR	WHITE	5197TR	BLUE
5193TR	ORANGE	5198TR	GREY
5194TR	YELLOW	5199TR	PURPLE

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2. TAPE:
   MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
   ANSI/EIA-481 STANDARD
3. REEL:
   7" [180.0] DIA. 1000 PIECES PER REEL

TEST POINT SPECIFICATIONS:

1. CONTACT:
   MAT'L -.008 [0.20] TH'K PHOSPHOR BRONZE
   FINISH: SILVER PLATE
2. INSULATOR:
   MAT'L -PA6T, UL 94V-0
   (SEE COLOR IN THE TABLE)

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME	TEST POINT		
MATERIAL	AS NOTED		
FINISH	AS NOTED	DRN BY: NT	DATE: 2.26.19
		APP'D: RH	SCALE: 5X
TOLERANCES: DECIMAL ± .005 [± 0.13] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED		CODE: C	DWG NO.: 5190TR-5199TR

Downloaded from Arrow.com.