



NVIDIA ConnectX-6 Dx Ethernet Adapter Cards User Manual

Table of contents

Introduction	7
Interfaces	19
Driver Installation	24
Linux Driver Installation	24
Windows Driver Installation	25
VMware Driver Installation	36
Updating Adapter Firmware	40
Troubleshooting	42
Specifications	45
Monitoring	63
Finding the MAC on the Adapter Card	64
Compliance	65
Document Revision History	78

About This Manual

This User Manual describes NVIDIA® ConnectX®-6 Dx Ethernet adapter cards. It provides details as to the interfaces of the board, specifications, required software and firmware for operating the board, and relevant documentation.

Ordering Part Numbers

The table below provides the ordering part numbers (OPN) for the available ConnectX-6 Dx adapter cards designed to fit into Half-Height, Half-Length (HHHL) slots.

Configuration	NVIDIA SKU	Legacy OPN	Marketing Description
100GbE Cards	900-9X6AG-0086-ST0 ^(a)	MCX623106AC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket
	900-9X6AG-0056-ST1	MCX623106AN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, PCIe 4.0 x16 , No Crypto, Tall Bracket
	900-9X6AG-0076-ST0	MCX623106AS-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, PCIe 4.0 x16, Secure Boot , No Crypto, Tall Bracket

Note:

^(a) If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Cards Product Release Notes document to learn about a potential bandwidth limitation. See [Related Documents](#) section for details on accessing the document.

Legacy (EOL) Ordering Part Numbers

Legacy OPN	Marketing Description
MCX621202AS-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, with active cooling, Dual-port SFP28, PCIe 4.0 x8, Secure Boot , No Crypto, Tall Bracket

Legacy OPN	Marketing Description
MCX621202AC-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, with active cooling, Dual-port SFP28 , PCIe 4.0 x8, Crypto and Secure Boot , Tall Bracket
MCX623105AN-VDAT	ConnectX-6 Dx EN adapter card, 200GbE, Single-port QSFP56 , PCIe 4.0 x16 , No Crypto, Tall Bracket
MCX623102AS-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x16, Secure Boot , No Crypto, Tall Bracket
MCX623102AS-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x16, Secure Boot , No Crypto, Tall Bracket
MCX621102AN-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x8 , No Crypto, Tall Bracket
MCX621102AC-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x8, Crypto and Secure Boot , Tall Bracket
MCX623102AC-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket
MCX623102AN-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x16 , No Crypto, Tall Bracket
MCX621102AE-ADAT	ConnectX-6 Dx EN adapter card, 25GbE, Dual-port SFP28 , PCIe 4.0 x8, Crypto , No Secure Boot, Tall Bracket
MCX623102AC-GDAT	ConnectX-6 Dx EN adapter card, 50GbE, Dual-port SFP56 , PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket
MCX623102AN-GDAT	ConnectX-6 Dx EN adapter card, 50GbE, Dual-port SFP56 , PCIe 4.0 x16 , No Crypto, Tall Bracket
MCX623102AE-GDAT	ConnectX-6 Dx EN adapter card, 50GbE, Dual-port SFP56 , PCIe 4.0 x16, Crypto , No Secure Boot, Tall Bracket
MCX623102AS-GDAT	ConnectX-6 Dx EN adapter card, 50GbE, Dual-port SFP56 , PCIe 4.0 x16, Secure Boot , No Crypto, Tall Bracket
MCX623105AN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Single-port QSFP56 , PCIe 4.0 x16 , No Crypto, Tall Bracket
MCX623106PC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , with PPS In/Out , PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket
MCX623105AC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Single-port QSFP56 , PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket

Legacy OPN	Marketing Description
MCX623105AE-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Single-port QSFP56 , PCIe 4.0 x16, Crypto , No Secure Boot, Tall Bracket
MCX623106AE-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , PCIe 4.0 x16, Crypto , No Secure Boot, Tall Bracket
MCX623109AC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE , Single-port DSFP, PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket
MCX623109AN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE , Single-port DSFP, PCIe 4.0 x16, No Crypto, Tall Bracket
MCX623106GC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, Enhanced-SyncE & PTP GM support and GNSS , PPS Out, PCIe 4.0 x16, Crypto and Secure Boot , FHHL with Tall Bracket
MCX623106TC-CDAT ^(a)	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, Enhanced-SyncE & PTP, PPS In/Out , PCIe 4.0 x16, Crypto and Secure Boot , FHHL with Tall Bracket
MCX623106GN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56, Enhanced-SyncE & PTP GM support and GNSS, PPS Out , PCIe 4.0 x16, No Crypto, Tall Bracket
MCX623106PC-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , with PPS In/Out , PCIe 4.0 x16, Crypto and Secure Boot, Tall Bracket
MCX623106PE-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , with PPS In/Out , PCIe 4.0 x16, Crypto , No Secure Boot, Tall Bracket
MCX623106PN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , with PPS In/Out , PCIe 4.0 x16 , No Crypto , Tall Bracket
MCX623106TN-CDAT	ConnectX-6 Dx EN adapter card, 100GbE, Dual-port QSFP56 , with PPS In/Out , PCIe 4.0 x16 , No Crypto , Tall Bracket
MCX623105AE-VDAT	ConnectX-6 Dx EN adapter card, 200GbE, Single-port QSFP56 , PCIe 4.0 x16, Crypto , No Secure Boot, Tall Bracket
MCX623105AS-VDAT	ConnectX-6 Dx EN adapter card, 200GbE, Single-port QSFP56 , PCIe 4.0 x16, Secure Boot , No Crypto, Tall Bracket
MCX623105AC-VDAT ^(a)	ConnectX-6 Dx EN adapter card, 200GbE, Single-port QSFP56 , PCIe 4.0 x16, Crypto and Secure Boot , Tall Bracket

Legacy OPN	Marketing Description
<p>Note:</p> <p>(a) If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Cards Product Release Notes document to learn about a potential bandwidth limitation. See Related Documents section for details on accessing the document.</p>	

Intended Audience

This manual is intended for the installer and user of these cards. The manual assumes basic familiarity with Ethernet network and architecture specifications.

Technical Support

Customers who purchased NVIDIA products directly from NVIDIA are invited to contact us through the following methods:

- URL: <https://www.nvidia.com> > Support
- E-mail: enterprisesupport@nvidia.com

Customers who purchased NVIDIA M-1 Global Support Services, please see your contract for details regarding Technical Support.

Customers who purchased NVIDIA products through an NVIDIA-approved reseller should first seek assistance through their reseller.

Related Documentation

NVIDIA MLNX_OFED for Linux User Manual and Release Notes	User Manual and Release Notes describing MLNX_OFED features, performance, band diagnostic, tools content, and configuration. See NVIDIA MLNX_OFED for Linux Documentation.
WinOF-2 for Windows User Manual and Release Notes	User Manual describing WinOF-2 features, performance, Ethernet diagnostic, tools content, and configuration. See WinOF-2 for Windows Documentation .
NVIDIA VMware for Ethernet User Manual and Release Notes	User Manual describing the various components of the NVIDIA ConnectX® NATIVE ESXi stack. See VMware® ESXi Documentation .

NVIDIA MLNX_OFED for Linux User Manual and Release Notes	User Manual and Release Notes describing MLNX_OFED features, performance, band diagnostic, tools content, and configuration. See NVIDIA MLNX_OFED for Linux Documentation.
NVIDIA Firmware Update	NVIDIA firmware update and query utility used to update the firmware. See NVIDIA Firmware Utility_(mlxup) Documentation .
NVIDIA Firmware Tools (MFT) User Manual	User Manual describing the set of MFT firmware management tools for a single node. See MFT User Manual .
IEEE Std 802.3 Specification	IEEE Ethernet Specifications
PCI Express Specifications	Industry Standard PCI Express Base and Card Electromechanical Specifications .
LinkX Interconnect Solutions	LinkX Ethernet cables and transceivers are designed to maximize the performance of High-Performance Computing networks, requiring high-bandwidth, low-latency connections between compute nodes and switch nodes. NVIDIA offers one of the industry's broadest portfolio of 40GbE, 56GbE, 100GbE, 200GbE and 400GbE cables, including Direct Attach Copper cables (DACs), copper splitter cables, Active Optical Cables (AOCs) and transceivers in a wide range of lengths from 0.5m to 10km. In addition to meeting Ethernet standards, NVIDIA tests every product in an end-to-end environment ensuring a Bit Error Rate of less than 1E-15 . Read more at LinkX Cables and Transceivers .
ConnectX-6 Dx Adapters Product Release Notes	Describes the hardware release notes for the ConnectX-6 Dx adapters. The document is available via NVOnline, please contact your NVIDIA representative for access.

Document Conventions

When discussing memory sizes, MB and MBytes are used in this document to mean size in mega Bytes. The use of Mb or Mbits (small b) indicates size in mega bits. In this document PCIe is used to mean PCI Express.

Revision History

A list of the changes made to this document are provided in [.Document Revision History](#).

Introduction

Product Overview

This is the *User Manual* for Ethernet adapter cards based on the ConnectX®-6 Dx integrated circuit device.

As the world's most advanced cloud SmartNIC, ConnectX-6 Dx provides up to two ports of 25, 50 or 100Gb/s or a single-port of 200Gb/s Ethernet connectivity, powered by 50Gb/s PAM4 SerDes technology and PCIe Gen 4.0 host connectivity. ConnectX-6 Dx continues among NVIDIA's innovation path in scalable cloud fabrics, delivering unparalleled performance and efficiency at every scale. ConnectX-6 Dx's innovative hardware offload engines, including IPsec and TLS inline data-in-motion encryption, are ideal for enabling secure network connectivity in modern data-center environments. Please refer to [Feature and Benefits](#) for more details.

ConnectX-6 Dx 25GbE Adapter Cards

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Crypto
MCX621102AC-ADAT	4.89in. x 2.71in (124.22mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x8	✓	✓
MCX621102AN-ADAT	4.89in. x 2.71in (124.22mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x8	-	-

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Crypto
MCX621102AN-ADAT	4.89in. x 2.71in (124.22mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x8	-	-
MCX623102AC-ADAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓
MCX623102AN-ADAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-
MCX623102AS-ADAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	-

ConnectX-6 Dx 25GbE Adapter Cards with Active Cooling

i Note

These cards are optimized for Workstation Environments and include an onboard cooling fan that meets the acoustic requirements for workstations.

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Crypto
MCX621202AS-ADAT	6.01in. x 2.71in (152.90mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x8	✓	-
MCX621202AC-ADAT	6.01in. x 2.71in (152.90mm x 68.90mm)	25/10/1 GbE	Dual-port SFP28	PCIe Gen 4.0 SERDES @ 16.0GT/s x8	✓	-

ConnectX-6 Dx 50GbE Adapter Cards

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Crypto
MCX623102AC-GDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	50/25/10/1 GbE	Dual-port SFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓
MCX623102AE-GDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	✓
MCX623102AN-GDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Crypto
MCX623102AS-GDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	25/10/1 GbE	Dual-port SFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	-

ConnectX-6 Dx 100GbE Adapter Cards

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Cryp
MCX623105AN-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-
MCX623106AN-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-
MCX623105AC-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓
MCX623106AC-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Cryp
MCX623105AE-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	✓
MCX623106AE-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	✓
MCX623106AS-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	-

ConnectX-6 Dx 100GbE Adapter Cards for Timing and Telecommunication Application SMAs

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Cryp
MCX623106PN-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot	Cryp
MCX623106PC-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓
MCX623106TN-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-
MCX623106TC-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓
MCX623106GN-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-	-
MCX623106GC-CDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	100/50/25/10/1 GbE	Dual-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓	✓

ConnectX-6 Dx 200GbE Adapter Cards

OPN	Form Factor/Dimensions	Data Transmission Rate	No. of Ports and Type	PCIe Interface	Secure Boot
MCX623105AC-VDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	200/100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓
MCX623105AE-VDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	200/100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-
MCX623105AN-VDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	200/100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	-
MCX623105AS-VDAT	5.59in. x 2.71in (142.00mm x 68.90mm)	200/100/50/25/10/1 GbE	Single-port QSFP56	PCIe Gen 4.0 SERDES @ 16.0GT/s x16	✓

For more detailed information see [Specifications](#).

Features and Benefits

Note

This section describes hardware features and capabilities. Please refer to the relevant driver and/or firmware release notes for feature availability.

Feature	Description
PCI Express (PCIe)	PCIe Gen 4.0 SERDES@ 8.0GT/s / 16.0GT/s through x8/x16 Edge Connector
Up to 200GbE	NVIDIA adapters comply with the following IEEE 802.3 standards: 200GbE / 100GbE / 50GbE / 40GbE / 25GbE / 10GbE / 1GbE – IEEE 802.3bj, 802.3bm 100 Gigabit Ethernet – IEEE 802.3by, Ethernet Consortium25, 50 Gigabit Ethernet, supporting all FEC modes– IEEE 802.3ba 40 Gigabit Ethernet– IEEE 802.3by 25 Gigabit Ethernet– IEEE 802.3ae 10 Gigabit Ethernet– IEEE 802.3ap based auto-negotiation and KR startup– IEEE 802.3ad, 802.1AX Link Aggregation– IEEE 802.1Q, 802.1P VLAN tags and priority– IEEE 802.1Qau (QCN)– Congestion Notification– IEEE 802.1Qaz (ETS)– IEEE 802.1Qbb (PFC)– IEEE 802.1Qbg– IEEE 1588v2– Jumbo frame support (9.6KB)
Memory	<ul style="list-style-type: none">• PCI Express - stores and accesses Ethernet fabric connection information and packet data.• SPI Quad - includes 256Mbit SPI Quad Flash device (MX25L25645GXDI-08G device by Macronix)• Available only in QSFP cards: FRU EEPROM - Stores the parameters and personality of the card. The EEPROM capacity is 128Kbit. FRU I2C address is (0x50) and is accessible through the PCIe SMBus (Note: A ddress 0x58 is reserved.)
Overlay Networks	In order to better scale their networks, data center operators often create overlay networks that carry traffic from individual virtual machines over logical tunnels in encapsulated formats such as NVGRE and VXLAN. While this solves network scalability issues, it hides the TCP packet from the hardware offloading engines, placing higher loads on the host CPU. ConnectX-6 Dx effectively addresses this by providing advanced NVGRE and VXLAN hardware offloading engines that encapsulate and de-capsulate the overlay protocol.

Feature	Description
RDMA over Converged Ethernet (RoCE)	ConnectX-6 Dx, utilizing RoCE (RDMA over Converged Ethernet) technology, delivers low-latency and high-performance over Band and Ethernet networks. Leveraging data center bridging (DCB) capabilities, as well as ConnectX-6 Dx, advanced congestion control hardware mechanisms, RoCE provides efficient low-latency RDMA services over Layer 2 and Layer 3 networks.
NVIDIA PeerDirect [®]	NVIDIA PeerDirect [®] communication provides high-efficiency RDMA access by eliminating unnecessary internal data copies between components on the PCIe bus (for example, from GPU to CPU), and therefore significantly reduces application run time. ConnectX-6 Dx advanced acceleration technology enables higher cluster efficiency and scalability to tens of thousands of nodes.
CPU Offload	Adapter functionality enables reduced CPU overhead leaving more CPU resources available for computation tasks. Open vSwitch (OVS) offload using ASAP ² (TM). Flexible match-action flow tables• Tunneling encapsulation/decapsulation
Quality of Service (QoS)	Support for port-based Quality of Service enabling various application requirements for latency and SLA.
Hardware-based I/O Virtualization	ConnectX-6 Dx provides dedicated adapter resources and guaranteed isolation and protection for virtual machines within the server.
Storage Acceleration	A consolidated compute and storage network achieves significant cost-performance advantages over multi-fabric networks. Standard block and file access protocols can leverage <ul style="list-style-type: none"> • RDMA for high-performance storage access • NVMe over Fabric offloads for the target machine
SR-IOV	ConnectX-6 Dx SR-IOV technology provides dedicated adapter resources and guaranteed isolation and protection for virtual machines (VM) within the server.
High-Performance Accelerations	<ul style="list-style-type: none"> • Tag Matching and Rendezvous Offloads • Adaptive Routing on Reliable Transport• Burst Buffer Offloads for Background Checkpointing

Feature	Description
Time Sensitive Applications	<p>NVIDIA offers a full IEEE 1588v2 PTP software solution, as well as time-sensitive related features called “5T”. NVIDIA PTP and 5T software solutions are designed to meet the most demanding PTP profiles. ConnectX-6 Dx incorporates an integrated Hardware Clock (PHC) that allows ConnectX-6 Dx to achieve sub 20u Sec accuracy and also offers many timing-related functions such as time-triggered scheduling or time-based SND accelerations (time-based ASAP²). Furthermore, 5T technology enables the software application to transmit fronthaul (ORAN) compatible in high bandwidth. The PTP part supports the subordinate clock, master clock, and boundary clock.</p> <p>ConnectX-6 Dx PTP solution allows you to run any PTP stack on your host.</p>
Enhanced-SyncE & PTP	<p>NVIDIA offers ConnectX-6 Dx cards with SyncE support including an improved holdover to meet ITU-T G.8273.2 class C.</p> <p>Enabled in MCX623106TN-CDAT, MCX623106TC-CDAT, MCX623106GN-CDAT, and MCX623106GC-CDAT.</p>
Grand Master (GNSS Reciver)	<p>NVIDIA offers ConnectX-6 Dx with an integrated GNSS receiver to allow a compact and efficient solution for a Grand Master at every server.</p> <p>Enabled in MCX623106G[N/C]-CDAT</p>

Feature	Description
PPS In/Out SMAs	<p>NVIDIA offers a full IEEE 1588v2 PTP software solution, as well as time-sensitive related features called “5T”. NVIDIA PTP and 5T software solutions are designed to meet the most demanding PTP profiles. ConnectX-6 Dx incorporates an integrated Hardware Clock (PHC) that allows ConnectX-6 Dx to achieve sub 20u Sec accuracy and also offers many timing-related functions such as time-triggered scheduling or time-based SND accelerations (time-based ASAP²). Furthermore, 5T technology enables the software application to transmit fronthaul (ORAN) compatible in high bandwidth. The PTP part supports the subordinate clock, master clock, and boundary clock. ConnectX-6 Dx PTP solution allows you to run any PTP stack on your host.</p> <p>With respect to testing and measurements, selected NVIDIA adapters allow you to use the PPS-out signal from the onboard SMA connector, ConnectX-6 Dx also allows measuring PTP in scale, with PPS-In signal. The PTP HW clock on the Network adapter will be sampled on each PPS-In signal, and the timestamp will be sent to the SW.</p> <p>Enabled in MCX623106PN-CDAT, MCX623106PC-CDAT, MCX623106TN-CDAT, MCX623106TC-CDAT, MCX623106GN-CDAT, and MCX623106GC-CDAT.</p>

Operating Systems/Distributions

- RHEL/CentOS
- Windows
- FreeBSD
- VMware
- OpenFabrics Enterprise Distribution (MLNX_OFED)
- OpenFabrics Windows Distribution (WinOF-2)

Connectivity


- Interoperable with 1/10/25/40/50/100/200 Gb/s Ethernet switches
- Passive copper cable with ESD protection
- Powered connectors for optical and active cable support

Interfaces

The below figures show the component side of the ConnectX-6 Dx adapter card. Each numbered interface that is referenced in the figures is described in the following table with a link to detailed information.

i Note

The below figures are for illustration purposes only and might not reflect the current revision of the adapter card.

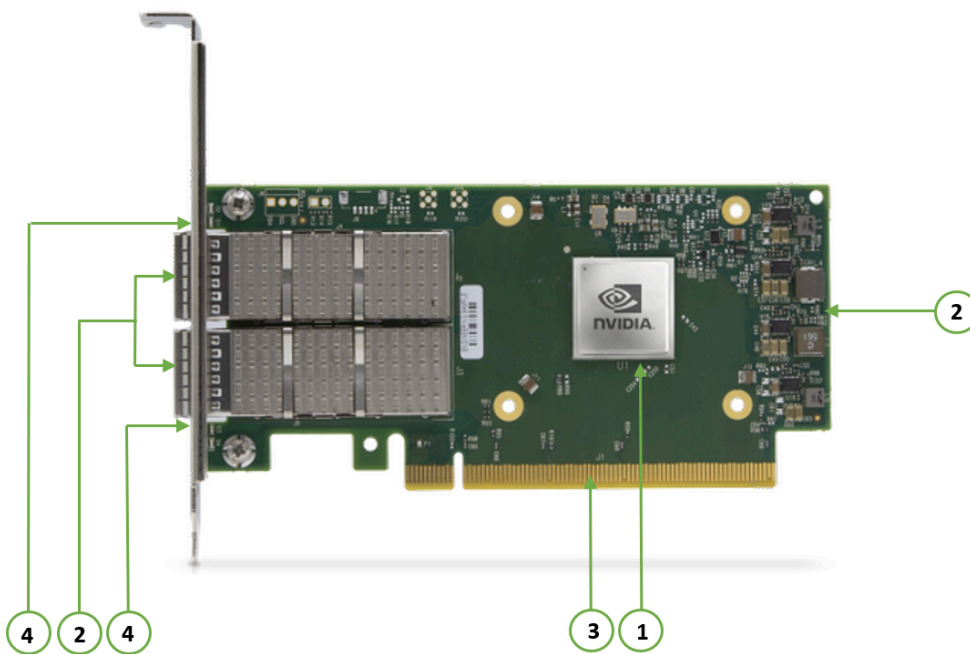

Callout	Item	Description
1	“ConnectX-6 Dx IC”	ConnectX-6 Dx IC on the board.

Callout	Item	Description
2	"Ethernet SFP28/SFP56/QSFP56 Interface"	Ethernet traffic is transmitted through the adapter's SFP28/SFP56/QSFP56 connectors. The networking connectors allow for the use of modules, optical and passive cable interconnect solutions.
3	"PCI Express Interface"	PCIe Gen 3.0/4.0 through an x8/x16 edge connector.
4	"Networking Ports LEDs Interface"	There are two I/O LEDs per port to indicate speed and link status.
	"SMBus Interface"	Allows BMC connectivity using MCTP over SMBus or MCTP over PCIe protocols.
	"Voltage Regulators"	Voltage supply pins that feed onboard regulators.

ConnectX-6 Dx IC Interface

The ConnectX®-6 Dx EN family of adapter IC devices delivers two ports of 10/25/40/50/100Gb/s or a single-port of 200Gb/s Ethernet connectivity paired with best-in-class hardware capabilities that accelerate and secure cloud and data-center workloads.

Encryption

Note

Applies to Crypto OPNs only.

ConnectX-6 Dx brings security to every end-point, including:

- Purpose-built inline acceleration engines that offload IPsec and TLS data-in-motion and XTS-AES data-at-rest cryptographic operations.
- Stateful firewall solution acceleration, powered by Open vSwitch connection tracking and NVIDIA's ASAP2 technology.
- Embedded hardware root-of-trust and support for RSA-based secure firmware update and secure boot, providing guaranteed integrity of the network adapter.

Ethernet SFP28 / SFP56 / QSFP56 Interfaces

The network ports of the ConnectX-6 Dx adapter card are compliant with the IEEE 802.3 Ethernet standards listed in [Features and Benefits](#). Ethernet traffic is transmitted through the SFP28 / SFP56 / QSFP56 connector on the adapter card.

Note

The adapter card includes special circuits to protect from ESD shocks to the card/server when plugging copper cables.

PCI Express Interface

ConnectX-6 Dx adapter cards support PCI Express Gen 3.0/4.0 (1.1 and 2.0 compatible) through x8/16 edge connectors. The device can be either a master initiating the PCI Express bus operations, or a slave responding to PCI bus operations.

The following lists PCIe interface features:

- PCIe Gen 4.0 and 3.0 compliant, 2.0 and 1.1 compatible
- 2.5, 5.0, 8.0, or 16.0 GT/s link rate x8 or x16 lanes
- Auto-negotiates to x16, x8, x4, x2, or x1
- Support for MSI/MSI-X mechanisms

Networking Ports LEDs Interface

For the networking ports LEDs description, follow the below table depending on the OPN you have purchased.

OPN	LEDs Scheme
MCX621102A[C/N/E]-ADAT, MCX621202A(C/S)-ADAT	Scheme 1: One Bi-Color LED

OPN	LEDs Scheme
MCX623102A[C/N]-ADAT, MCX623102A[C/N]-GDAT, MCX623102A[S/E/N/C]-GDAT MCX623105A[N/E]-CDAT, MCX623106A[C/N/S/E]-CDAT, MCX623106P[C/N/E]-CDAT,MCX623105A[C/N/S/E]-V DAT	<u>Scheme 2: One Bi-Color LED and one Single Color LED</u>

Scheme 1: One Bi-Color LED

There is one bicolor (Yellow and Green) I/O LED per port to indicate speed and link status.

Link Indications

State	Bi-Color LED (Yellow/Green) Physical link speed									
Beacon command for locating the adapter card	1Hz blinking Yellow									
Error	4Hz blinking Yellow Indicates an error with the link. The error can be one of the following:									
	<table border="1"> <thead> <tr> <th>Error Type</th> <th>Description</th> <th>LED Behavior</th> </tr> </thead> <tbody> <tr> <td>I²C</td> <td>I²C access to the networking ports fails</td> <td>Blinks until error is fixed</td> </tr> <tr> <td>Over-current</td> <td>Over-current condition of the networking ports</td> <td>Blinks until error is fixed</td> </tr> </tbody> </table>	Error Type	Description	LED Behavior	I ² C	I ² C access to the networking ports fails	Blinks until error is fixed	Over-current	Over-current condition of the networking ports	Blinks until error is fixed
	Error Type	Description	LED Behavior							
I ² C	I ² C access to the networking ports fails	Blinks until error is fixed								
Over-current	Over-current condition of the networking ports	Blinks until error is fixed								
Physical Activity	The Green LED will blink.									
Link Up	The Green LED will be solid.									

Scheme 2: One Bi-Color LED and one Single Color LED

There are two I/O LEDs per port to indicate speed and link status. LED1 is a bicolor LED (Yellow and green) and LED2 is a single color LED (green).

Link Indications

State	Bi-Color LED (Yellow/Green)	Single Color LED (Green)									
Beacon command for locating the adapter card	1 Hz blinking Yellow	OFF									
Error	4Hz blinking Yellow Indicates an error with the link. The error can be one of the following:	ON									
	<table border="1"> <thead> <tr> <th>Error Type</th> <th>Description</th> <th>LED Behavior</th> </tr> </thead> <tbody> <tr> <td>I²C</td> <td>I²C access to the networking ports fails</td> <td>Blinks until error is fixed</td> </tr> <tr> <td>Over-current</td> <td>Over-current condition of the networking ports</td> <td>Blinks until error is fixed</td> </tr> </tbody> </table>		Error Type	Description	LED Behavior	I ² C	I ² C access to the networking ports fails	Blinks until error is fixed	Over-current	Over-current condition of the networking ports	Blinks until error is fixed
	Error Type		Description	LED Behavior							
I ² C	I ² C access to the networking ports fails	Blinks until error is fixed									
Over-current	Over-current condition of the networking ports	Blinks until error is fixed									
Physical Activity	In full port speed: the Green LED is solid In less than full port speed: the Yellow LED is solid	Blinking									
Link Up	In full port speed: the Green LED is solid In less than full port speed: the Yellow LED is solid	ON									

SMBus Interface

ConnectX-6 Dx technology maintains support for manageability through a BMC. ConnectX-6 Dx PCIe stand-up adapter can be connected to a BMC using MCTP over SMBus or MCTP over PCIe protocols as if it is a standard NVIDIA PCIe stand-up adapter. For configuring the adapter for the specific manageability solution in use by the server, please contact NVIDIA Support.

Voltage Regulators

The voltage regulator power is derived from the PCI Express edge connector 12V supply pins. These voltage supply pins feed on-board regulators that provide the necessary power to the various components on the card.

Driver Installation

Please use the relevant driver installation section.

- [Linux Driver Installation](#)
- [Windows Driver Installation](#)
- [VMware Driver Installation](#)

Linux Driver Installation

This section describes how to install and test the MLNX_OFED for Linux package on a single server with a ConnectX-6 Dx adapter card installed.

Prerequisites

Requirements	Description
Platforms	A server platform with a ConnectX-6 Dx Ethernet adapter card installed.
Required Disk Space for Installation	1GB
Operating System	Linux operating system. For the list of supported operating system distributions and kernels, please refer to the <i>MLNX_OFED Release Notes</i> .
Installer Privileges	The installation requires administrator (root) privileges on the target machine.

Downloading MLNX_OFED

1. Verify that the system has a network adapter installed by running `lspci` command. The below table provides output examples per ConnectX-6 Dx card configuration.

```
# lspci -v | grep Mellanox
86:00.0 Network controller [0207]: Mellanox Technologies
MT28908A0 Family
Subsystem: Mellanox Technologies Device 0014
86:00.1 Network controller [0207]: Mellanox Technologies
MT28908A0 Family
Subsystem: Mellanox Technologies Device 0014
```

For Linux driver installation, please refer to [NVIDIA DOCA Installation Guide for Linux](#).

Windows Driver Installation

For Windows, download and install the latest WinOF-2 for Windows software package available via the NVIDIA website at: [WinOF-2 webpage](#). Follow the installation instructions included in the download package (also available from the download page).

The snapshots in the following sections are presented for illustration purposes only. The installation interface may slightly vary, depending on the operating system in use.

Software Requirements

For the full list of supported operating systems, please refer to the [WinOF-2 Documentation](#) -> Release Notes.

Downloading WinOF-2 Driver

➤ **To download the .exe file according to your Operating System, please follow the steps below:**

1. Obtain the machine architecture.
 1. To go to the Start menu, position your mouse in the bottom-right corner of the Remote Desktop of your screen.
 2. Open a CMD console (Click Task Manager-->File --> Run new task and enter CMD).

3. Enter the following command.

```
echo %PROCESSOR_ARCHITECTURE%
```

Note

On an x64 (64-bit) machine, the output will be “AMD64”.

2. Go to the WinOF-2 web page at: <https://www.nvidia.com/en-us/networking/> > Products > Software > InfiniBand Drivers (Learn More) > Nvidia WinOF-2.
3. Download the .exe image according to the architecture of your machine (see [Step 1](#)).

The name of the .exe is in the following format: MLNX_WinOF2-
<version>_<arch>.exe.

Note

Installing the incorrect .exe file is prohibited. If you do so, an error message will be displayed.

For example, if you install a 64-bit .exe on a 32-bit machine, the wizard will display the following (or a similar) error message: “The installation package is not supported by this processor type. Contact your vendor”

Installing WinOF-2 Driver

The snapshots in the following sections are for illustration purposes only. The installation interface may slightly vary, depending on the used operating system.

This section provides instructions for two types of installation procedures, and both require administrator privileges:

- Attended Installation

An installation procedure that requires frequent user intervention.

- Unattended Installation

An automated installation procedure that requires no user intervention.

Attended Installation

The following is an example of an installation session.

1. Double click the .exe and follow the GUI instructions to install MLNX_WinOF2.
2. **[Optional]** Manually configure your setup to contain the logs option (replace "LogFile" with the relevant directory).

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v" /l*vx  
[LogFile]"
```

3. **[Optional]** If you do not want to upgrade your firmware version (i.e., MT_SKIPFWUPGRD default value is False).

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v" MT_SKIPFWUPGRD=1"
```

4. **[Optional]** If you do not want to install the Rshim driver, run.

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v"  
MT_DISABLE_RSHIM_INSTALL=1"
```

Note


The Rshim driver installation will fail if a prior Rshim driver is already installed. The following fail message will be displayed in the log:

"ERROR!!! Installation failed due to following errors: MlxRshim drivers installation disabled and MlxRshim drivers Installed, Please remove the following oem inf files from driver store: <oem inf list>"


5. **[Optional]** If you want to skip the check for unsupported devices, run.

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v"  
SKIPUNSUPPORTEDDEVCHECK=1"
```


6. Click Next in the Welcome screen.

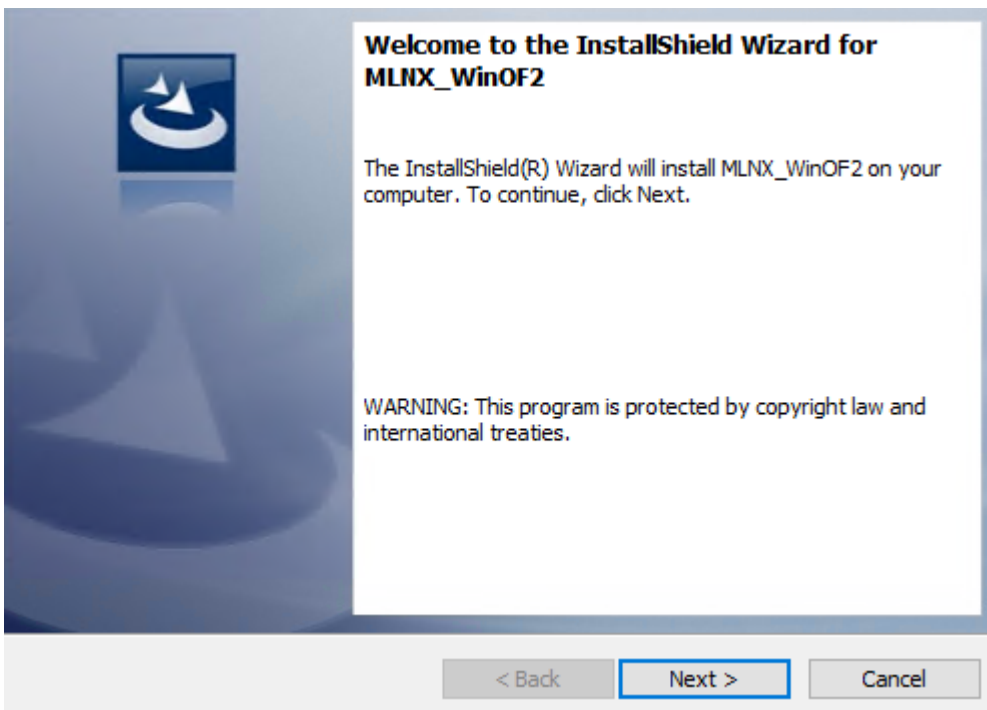

7. Read and accept the license agreement and click Next.

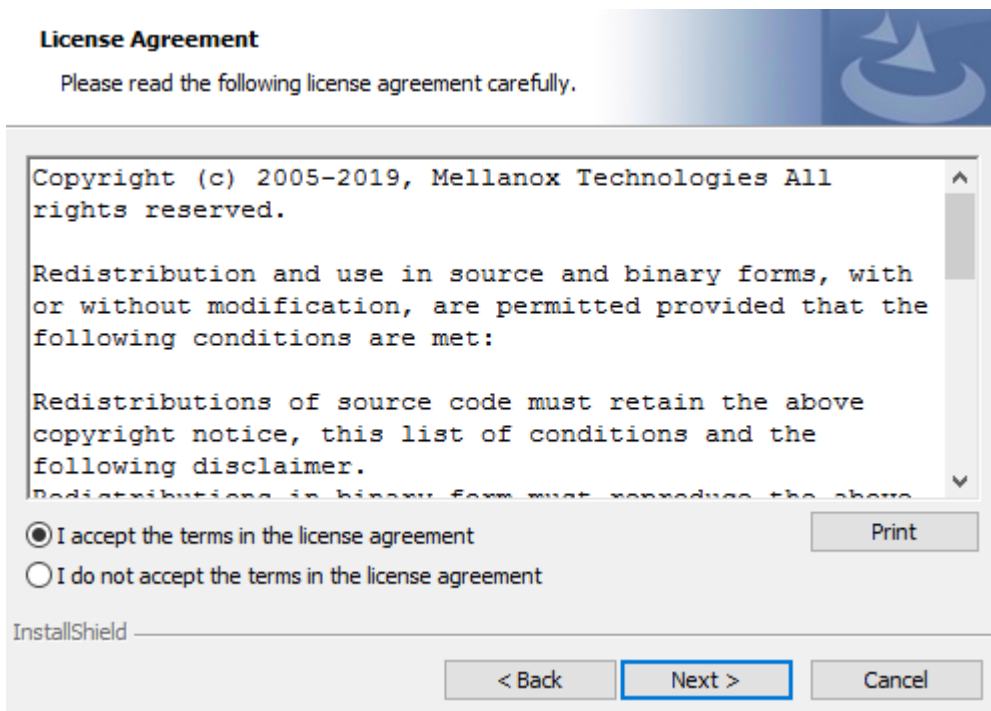


8. Select the target folder for the installation.

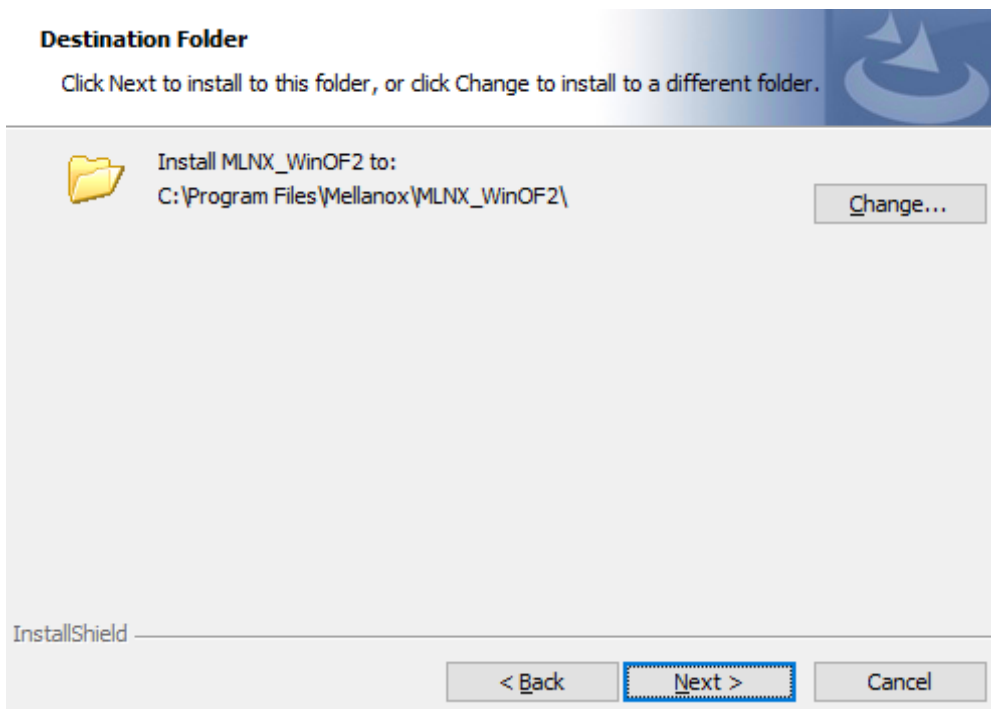


9. The firmware upgrade screen will be displayed in the following cases:

- If the user has an OEM card. In this case, the firmware will not be displayed.
- If the user has a standard NVIDIA® card with an older firmware version, the firmware will be updated accordingly. However, if the user has both an OEM

card and a NVIDIA® card, only the NVIDIA® card will be updated.

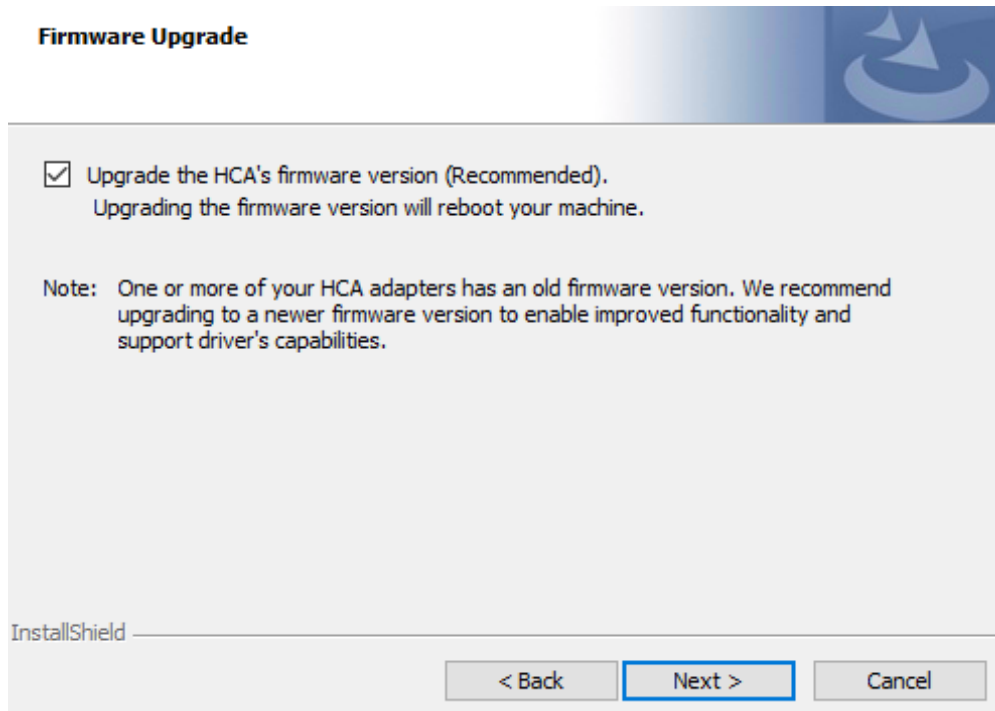

10. Select a Complete or Custom installation, follow [Step a](#) onward.

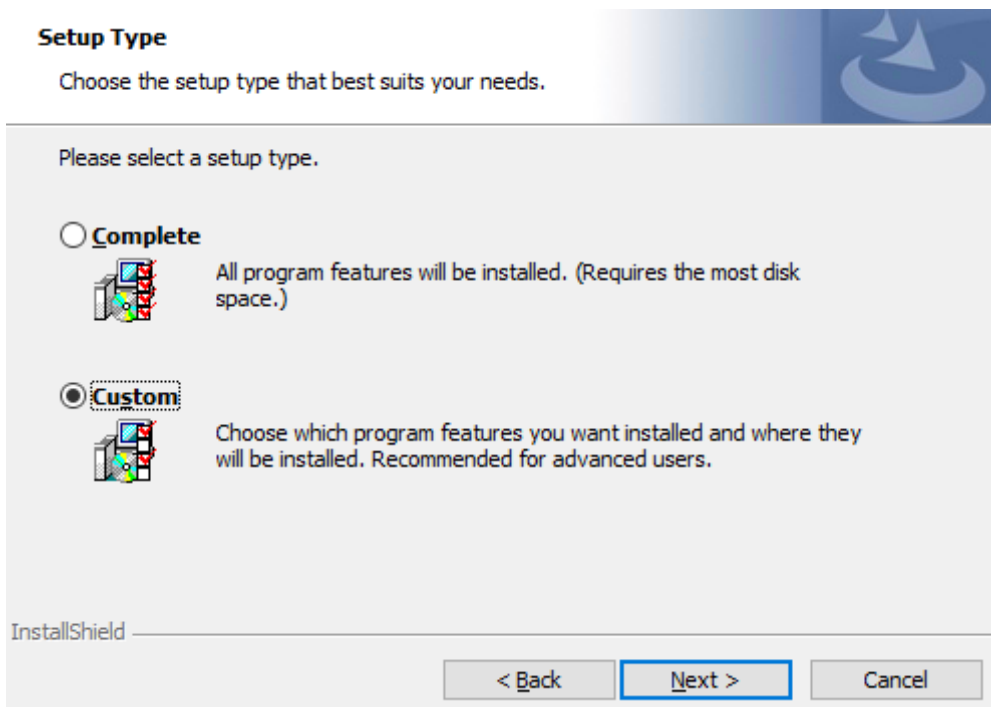


1. Select the desired feature to install:


- Performances tools - install the performance tools that are used to measure performance in user environment


- Documentation - contains the User Manual and Release Notes
- Management tools - installation tools used for management, such as mlxstat
- Diagnostic Tools - installation tools used for diagnostics, such as mlx5cmd


2. Click Next to install the desired tools.

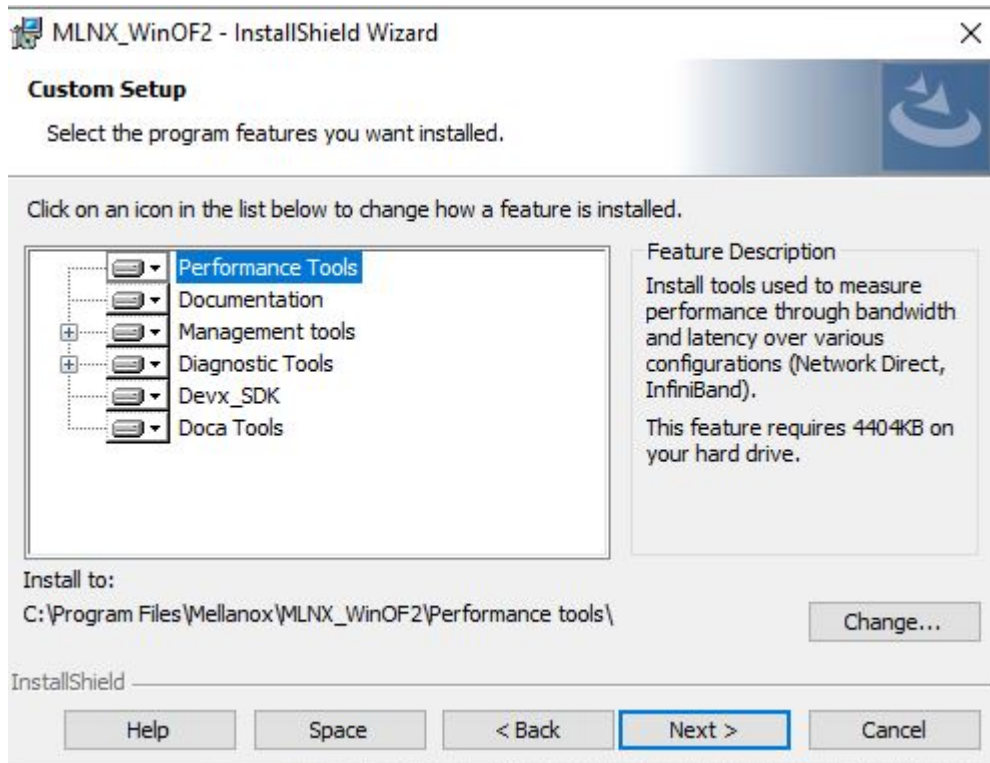


11. Click Install to start the installation.

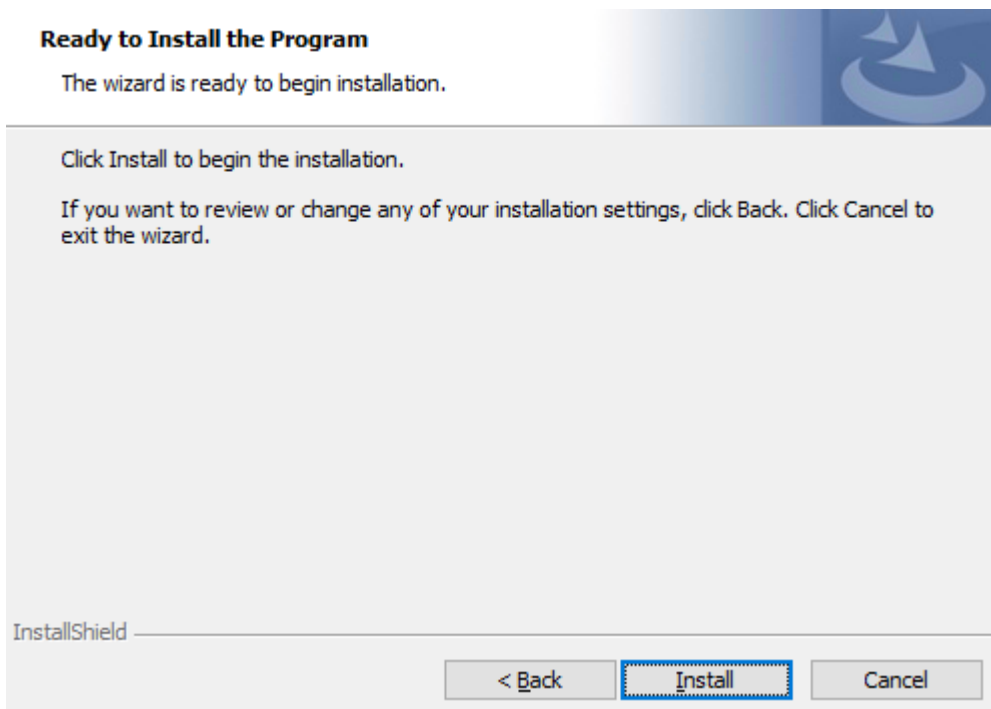

12. In case firmware upgrade option was checked in [Step 7](#), you will be notified if a firmware upgrade is required (see ).

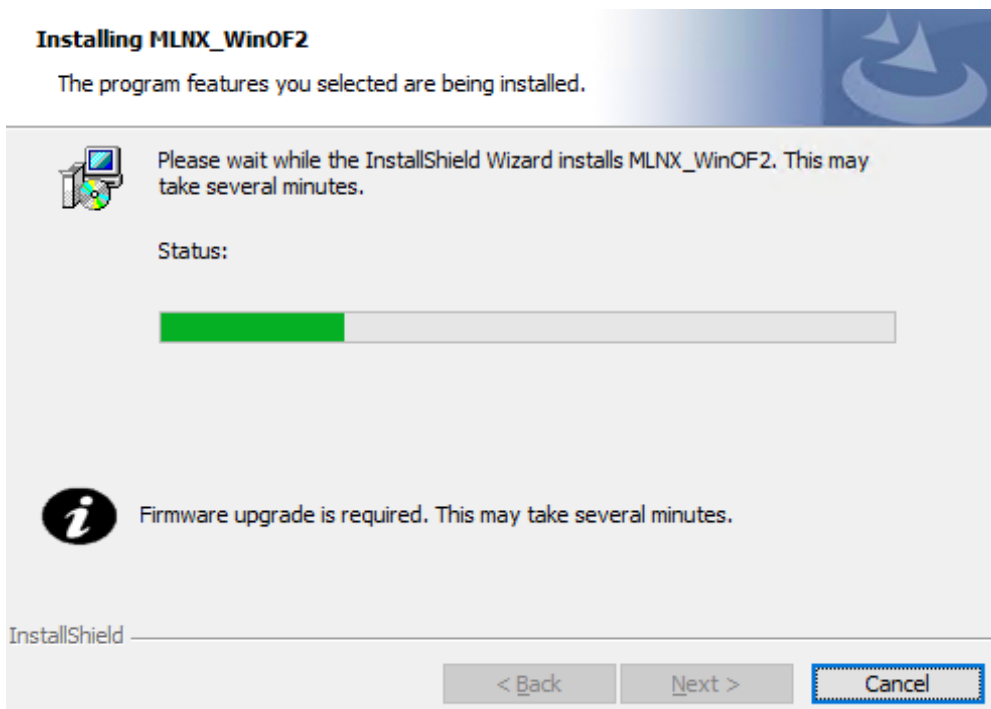

13. Click Finish to complete the installation.

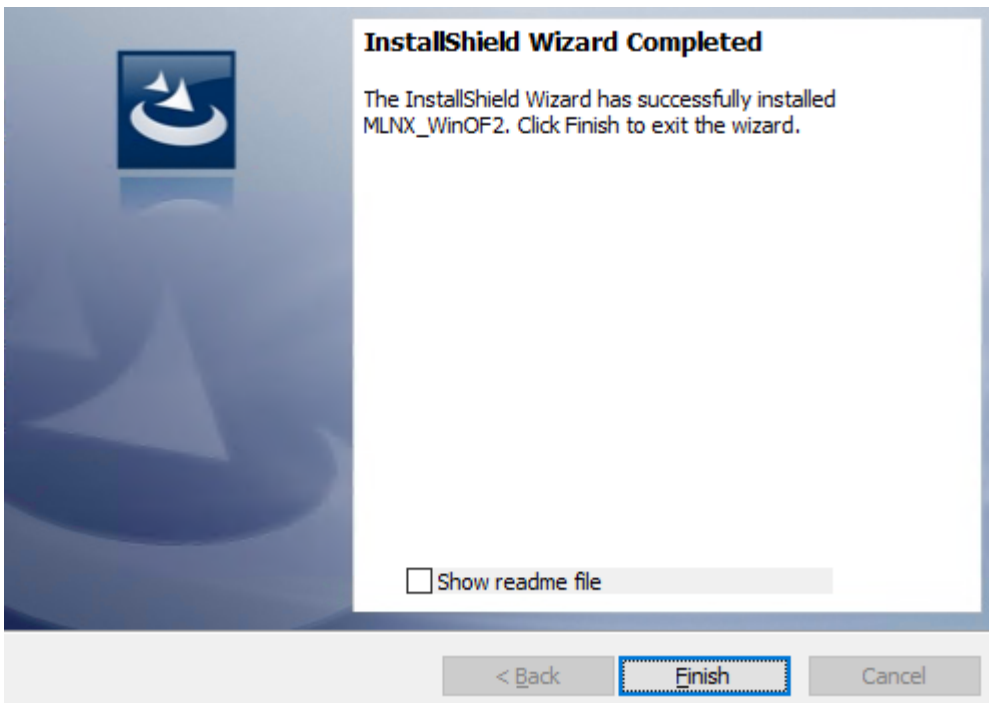

Unattended Installation

Note

If no reboot options are specified, the installer restarts the computer whenever necessary without displaying any prompt or warning to the user.

To control the reboots, use the */norestart* or */forcerestart* standard command-line options.

The following is an example of an unattended installation session.

1. Open a CMD console-> Click Start-> Task Manager File-> Run new task-> and enter CMD.
2. Install the driver. Run:

```
MLNX_WinOF2-[Driver/Version]_<revision_version>_All_-Arch.exe  
/S /v/qn
```

3. **[Optional]** Manually configure your setup to contain the logs option:

```
MLNX_WinOF2-[Driver/Version]_<revision_version>_All_-Arch.exe  
/S /v/qn /v"/l*vx [LogFile]"
```

4. **[Optional]** if you wish to control whether to install ND provider or not (i.e., *MT_NDPROPERTY* default value is *True*).

```
MLNX_WinOF2-[Driver/Version]_<revision_version>_All_Arch.exe  
/vMT_NDPROPERTY=1
```

5. **[Optional]** If you do not wish to upgrade your firmware version (i.e., *MT_SKIPFWUPGRD* default value is *False*).

```
MLNX_WinOF2-[Driver/Version]_<revision_version>_All_Arch.exe  
/vMT_SKIPFWUPGRD=1
```

6. **[Optional]** If you do not want to install the Rshim driver, run.

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v"  
MT_DISABLE_RSHIM_INSTALL=1"
```

Note

The Rshim driver installation will fail if a prior Rshim driver is already installed. The following fail message will be displayed in the log:

```
"ERROR!!! Installation failed due to following errors: MlxRshim
drivers installation disabled and MlxRshim drivers Installed,
Please remove the following oem inf files from driver store:
<oem inf list>"
```

7. **[Optional]** If you want to enable the default configuration for Rivermax, run.

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v"MT_RIVERMAX=1 /!*vx
C:\Users\<user>\log.txt "
```

8. **[Optional]** If you want to skip the check for unsupported devices, run/

```
MLNX_WinOF2_<revision_version>_All_Arch.exe /v"
SKIPUNSUPPORTEDDEVCHECK=1"
```

Firmware Upgrade

If the machine has a standard NVIDIA® card with an older firmware version, the firmware will be automatically updated as part of the NVIDIA® WinOF-2 package installation. For information on how to upgrade firmware manually, please refer to [MFT User Manual](#).

If the machine has a DDA (pass through) facility, firmware update is supported only in the Host. Therefore, to update the firmware, the following must be performed:

1. Return the network adapters to the Host.
2. Update the firmware according to the steps in the [MFT User Manual](#).

3. Attach the adapters back to VM with the DDA tools.

VMware Driver Installation

This section describes VMware Driver Installation.

Hardware and Software Requirements

Requirement	Description
Platforms	A server platform with an adapter card based on NVIDIA devices: <ul style="list-style-type: none">• ConnectX®-6 Dx (EN) (firmware: fw-ConnectX6Dx)
Operating System	ESXi 8.x
Installer Privileges	The installation requires administrator privileges on the target machine.

Installing NATIVE ESXi Driver for VMware vSphere

Note

Please uninstall all previous driver packages prior to installing the new version.

To install the driver:

1. Log into the ESXi server with root permissions.
2. Install the driver.

```
#> esxcli software vib install -d <path>/<bundle_file>
```

Example:

```
#> esxcli software vib install -d /tmp/MLNX-NATIVE-ESX-ConnectX-4-5_4.16.8.8-10EM-650.0.0.4240417.zipesxcli
```

3. Reboot the machine.

4. Verify the driver was installed successfully.

```
esxcli software vib list | grep nmlx
nmlx5-core      4.16.8.8-10EM.650.0.0.4240417    MEL
PartnerSupported 2017-01-31
nmlx5-rdma      4.16.8.8-10EM.650.0.0.4240417    MEL
PartnerSupported 2017-01-31
```

Note

After the installation process, all kernel modules are loaded automatically upon boot.

Removing Earlier NVIDIA Drivers

Note

Please unload the previously installed drivers before removing them.

To remove all the drivers:

1. Log into the ESXi server with root permissions.
2. List all the existing NATIVE ESXi driver modules. (See Step 4 in [Installing NATIVE ESXi Driver for VMware vSphere.](#))
3. Remove each module:

```
#> esxcli software vib remove -n nmlx5-rdma
#> esxcli software vib remove -n nmlx5-core
```

Note

To remove the modules, you must run the command in the same order as shown in the example above.

4. Reboot the server.

Firmware Programming

1. Download the VMware bootable binary images v4.6.0 from the [Firmware Tools \(MFT\) site.](#)
 1. ESXi 6.5 File: mft-4.6.0.48-10EM-650.0.0.4598673.x86_64.vib
 2. MD5SUM: 0804cffe30913a7b4017445a0f0adbe1
2. Install the image according to the steps described in the [MFT User Manual.](#)

Note

The following procedure requires custom boot image downloading, mounting and booting from a USB device.

Updating Adapter Firmware

Each adapter card is shipped with the latest version of qualified firmware at the time of manufacturing. However, NVIDIA issues firmware updates occasionally that provide new features and bug fixes. To check that your card is programmed with the latest available firmware version, download the mlxup firmware update and query utility. The utility can query for available NVIDIA adapters and indicate which adapters require a firmware update. If the user confirms, mlxup upgrades the firmware using embedded images. The latest mlxup executable and documentation are available in [mlxup - Update and Query Utility](#).

```

[server1]# ./mlxup
Querying Mellanox devices firmware ...
Device Type:      ConnectX-6 Dx
Part Number:      MCX623105AN-VDAT
Description:      ConnectX®-6 Dx EN adapter card, 200GbE , Single-
port QSFP56, PCIe 4.0 x16, No Crypto, Tall Bracket
PSID:             MT_2190110032
PCI Device Name:  0000:06:00.0
Base GUID:        e41d2d0300fd8b8a
Versions:         Current          Available
                  FW 16.23.1020    16.24.1000

Status:           Update required

Device Type:      ConnectX-6 Dx
Part Number:      MCX623105AN-VDAT
Description:      ConnectX®-6 Dx EN adapter card, 200GbE , Single-
port QSFP56, PCIe 4.0 x16, No Crypto, Tall Bracket
PSID:             MT_2170110021
PCI Device Name:  0000:07:00.0
Base MAC:         0000e41d2da206d4
Versions:         Current          Available
                  FW 16.24.1000    16.24.1000

Status:           Up to date

Perform FW update? [y/N]: y
Device #1: Up to date
Device #2: Updating FW ... Done

Restart needed for updates to take effect.
Log File: /var/log/mlxup/mlxup-yyyymmdd.log

```

Troubleshooting

General Troubleshooting

Server unable to find the adapter	<ul style="list-style-type: none">• Ensure that the adapter is placed correctly• Make sure the adapter slot and the adapter are compatible Install the adapter in a different PCI Express slot• Use the drivers that came with the adapter or download the latest• Make sure your motherboard has the latest BIOS• Try to reboot the server
The adapter no longer works	<ul style="list-style-type: none">• Reseat the adapter in its slot or a different slot, if necessary• Try using another cable• Reinstall the drivers for the network driver files may be damaged or deleted• Reboot the server
Adapters stopped working after installing another adapter	<ul style="list-style-type: none">• Try removing and re-installing all adapters• Check that cables are connected properly• Make sure your motherboard has the latest BIOS
Link indicator light is off	<ul style="list-style-type: none">• Try another port on the switch• Make sure the cable is securely attached• Check you are using the proper cables that do not exceed the recommended lengths• Verify that your switch and adapter port are compatible
Link light is on, but with no communication established	<ul style="list-style-type: none">• Check that the latest driver is loaded• Check that both the adapter and its link are set to the same speed and duplex settings

Event message received of insufficient power	<ul style="list-style-type: none"> • When [adapter's current power consumption] > [PCIe slot advertised power limit] – a warning message appears in the server's system even logs (Eg. dmesg: "Detected insufficient power on the PCIe slot") • It's recommended to use a PCIe slot that can supply enough power. • If a message of the following format appears – "mlx5_core 0003:01:00.0: port_module:254:(pid 0): Port module event[error]: module 0, Cable error, One or more network ports have been powered down due to insufficient/unadvertised power on the PCIe slot" please upgrade your Adapter's firmware. • If the message remains – please consider switching from Active Optical Cable (AOC) or transceiver to Direct Attached Copper (DAC) connectivity.
--	--

Linux Troubleshooting

Environment Information	<pre>cat /etc/issue uname -acat /proc/cupinfo grep 'model name' uniqofed_info - sifconfig -aip link showethtool <interface>ethtool -i <interface_of_Mellanox_port_num>ibdev2netdev</pre>
Card Detection	<pre>lspci grep -i Mellanox</pre>
Mellanox Firmware Tool (MFT)	<p>Download and install MFT: MFT Documentation Refer to the User Manual for installation instructions.Once installed, run:mst startmst statusflint -d <mst_device> q</p>
Ports Information	<pre>ibstat ibv_devinfo</pre>
Firmware Version Upgrade	<p>To download the latest firmware version, refer to the NVIDIA Update and Query Utility.</p>
Collect Log File	<pre>cat /var/log/messages dmesg >> system.logjournalctl (Applicable on new operating systems)cat /var/log/syslog</pre>

Windows Troubleshooting

Environment Information	<p>From the Windows desktop choose the Start menu and run:</p> <pre>msinfo32</pre> <p>To export system information to a text file, choose the Export option from the File menu. Assign a file name and save.</p>
Mellanox Firmware Tool (MFT)	<p>Download and install MFT: MFT Documentation</p> <p>Refer to the User Manual for installation instructions. Once installed, open a CMD window and run: WinMFTmst startmst statusflint -d <mst_device> q</p>
Ports Information	vstat
Firmware Version Upgrade	<p>Download the latest firmware version using the PSID/board ID from here.</p> <pre>flint -d <mst_device> -i <firmware_bin_file> b</pre>
Collect Log File	<ul style="list-style-type: none"> • Event log viewer • MST device logs: <ul style="list-style-type: none"> ◦ mst start ◦ mst status • flint -d <mst_device> dc > dump_configuration.log • mstdump <mst_device> dc > mstdump.log

Specifications

Note

Power numbers are provided for passive cables only. For board power numbers while using active cables, please add the outcome of the following formula to the passive cables power numbers stated below:

Active_Module_Power x *Number_of_Modules* x 1.1 (efficiency factor)

MCX621 102AC-ADAT / MCX621 102AN-ADAT Specifications

Info

These products have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none">• MCX621 102AC-ADAT: Crypto enabled, Secure Boot enabled• MCX621 102AN-ADAT: Crypto disabled, Secure Boot disabled		
Physical	Size: 4.89in. x 2.71in (124.22mm x 68.90mm)		
	Connector: Dual SFP28 Ethernet (copper and optical)		
Protocol Support	Data Rate:	Ethernet	1/10/25 Gb/s
	Ethernet: 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR		
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 8 lanes (2.0 and 1.1 compatible)		

Power and Airflow Specifications^(a)	Voltage: 3.3Aux Maximum current: 100mA			
	Power	Cable	PCIe Gen 3.0	PCIe Gen 4.0
	Typical Power	Passive Cables	10.88W	11.29W
	Maximum Power	Passive Cables	15.55W	15.96W
	Maximum power available through SFP28 port: 1.5W (per port)			
	Airflow @ 55C^{b)}	Cable Type	Hot Aisle - Heatsink to Port	
		Passive Cable	200LFM	
Active 0.8W Cable		400 LFM		
Environmental	Temperature	Operational	0°C to 55°C	
		Non-operational	-40°C to 70°C ^(c)	
	Humidity	Operational	10% to 85% relative humidity	
		Non-operational	10% to 90% relative humidity	
Altitude (Operational)	3050m			
Regulatory	Safety	CB / cTUVus / CE		
	EMC	CE / FCC / VCCI / ICES / RCM		
	RoHS	RoHS compliant		
<p>a. Typical power for ATIS traffic load.</p> <p>b. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.</p> <p>c. The non-operational storage temperature specifications apply to the product without its package.</p>				

MCX623102AC-ADAT / MCX623102AN-ADAT / MCX623102AS-ADAT Specifications

i Info

These products have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623102AC-ADAT: Crypto enabled, Secure Boot enabled • MCX623102AN-ADAT: Crypto disabled, Secure Boot disabled • MCX623102AS-ADAT: Crypto disabled, Secure Boot enabled 				
Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)				
	Connector: Dual SFP28 Ethernet (copper and optical)				
Protocol Support	Data Rate:	Ethernet	1/10/25 Gb/s		
	Ethernet: 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR				
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)				
Power and Airflow ^(a)	Voltage: 3.3Aux				
	Maximum current: 100mA				
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0	
	Typical Power	Passive Cables	14.87W	15.68W	
	Maximum Power	Passive Cables	18.92W	19.74W	
	Maximum power available through SFP28 port: 2.5W (each port)				
	Airflow @ 55C^(b)	Cable Type	Hot Aisle - Heatsink to Port		
		Passive Cable	300LFM		
Active 0.8 Cable		400LFM			
Active 2.5W Cable		500LFM			

Environmental	Temperature	Operational	0°C to 55°C
		Non-operational	-40°C to 70°C (c)
	Humidity	Operational	10% to 85% relative humidity
		Non-operational	10% to 90% relative humidity
	Altitude (Operational)	3050m	
Regulatory	Safety	CB / cTUVus / CE	
	EMC	CE / FCC / VCCI / ICES / RCM	
	RoHS	RoHS compliant	

a. Typical power for ATIS traffic load.

b. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.

c. The non-operational storage temperature specifications apply to the product without its package.

MCX621202AS-ADAT / MCX621202AC-ADAT Specifications

Note

These cards are optimized for Workstation Environments and include an onboard cooling fan that meets the acoustic requirement for workstations.

- At Idle 20 dBA max
- TDP Room 34 dBA Max
- TDP Max 47 dBA Max

Fan speed is controlled automatically depending on board load.

Capabilities	<ul style="list-style-type: none"> • MCX621202AS-ADAT: Crypto disabled, Secure Boot enabled • MCX621202AC-ADAT: Crypto enabled, Secure Boot enabled
--------------	---

Physical	Size: 6.01 in. x 2.71 in (152.9mmx 68.9 mm)			
	Connector: Dual SFP28 Ethernet (copper and optical)			
Protocol Support	Data Rate:	Ethernet	1/10/25 Gb/s	
	Ethernet: 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR			
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 8 lanes (2.0 and 1.1 compatible)			
Capabilities	MCX621202AS-ADAT: Crypto Disabled, Secure Boot Enabled MCX621202AC-ADAT: Crypto Enabled ^(a) , Secure Boot Enabled			
Power Specifications^(a)	Voltage: 3.3Aux Maximum current: 100mA			
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0
	Typical Power	Passive Cables	9.6W	9.9W
	Maximum Power	Passive Cables	13.7W	14W
	Maximum power available through SFP28 port: 2.5W (each port)			
Maximum Allowed Inlet Temperature ^(b)	External Airflow Conditions	Cable Type	Maximum Allowed Fan Inlet Temperature	
	No External Airflow	Passive Copper Module	50°	
		NVIDIA SFP28 0.8W Module	40°	
		10G Base SFP-10G-T-NC 2.5W Cable	40°	
	150LFM External Airflow (Airflow Direction: Heatsink to Port)	Passive Copper Module	55°	
		NVIDIA SFP28 0.8W Module	50°	
		10G Base SFP-10G-T-NC 2.5W Cable	50°	

Environmental	Temperature	Operational	0°C to 55°C
		Non-operational	-40°C to 70°C ^(c)
	Humidity	Operational	10% to 85% relative humidity
		Non-operational	10% to 90% relative humidity
Altitude (Operational)	3050m		
Regulatory	Safety	CB / cTUVus / CE	
	EMC	CE / FCC / VCCI / ICES / RCM	
	RoHS	RoHS compliant	
<p>a. If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Product Release Notes document to learn about a potential bandwidth limitation. See Related Documents section for details on accessing the document.</p> <p>b. Typical power for ATIS traffic load.c. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.</p>			

MCX623102AC-GDAT / MCX623102AE-GDAT / MCX623102AN-GDAT / MCX623102AS-GDAT Specifications

Info

These products have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623102AC-GDAT: Crypto enabled, Secure Boot enabled • MCX623102AE-GDAT: Crypto disabled, Secure Boot disabled • MCX623102AN-GDAT: Crypto disabled, Secure Boot disabled • MCX623102AS-GDAT: Crypto disabled, Secure Boot enabled
--------------	---

Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)				
	Connector: Dual SFP56 Ethernet (copper and optical)				
Protocol Support	Data Rate:	Ethernet	1/10/25/40/50 Gb/s		
	Ethernet: 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR				
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)				
Power and Airflow (a)	Voltage: 3.3Aux Maximum current: 100mA				
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0	
	Typical Power	Passive Cables	14.94W	15.76W	
	Maximum Power	Passive Cables	20.16W	20.98W	
	Maximum power available through SFP56 port: 2.5W (each port)				
	Airflow Requirements @ 55C^(b)	Cable Type		Hot Aisle - Heatsink to Port	
		Passive Cable		300LFM	
Active 0.8 Cable		400LFM			
Environmental	Temperature	Operational	0°C to 55°C		
		Non-operational	-40°C to 70°C		
	Humidity	Operational	10% to 85% relative humidity		
		Non-operational	10% to 90% relative humidity ^(c)		
	Altitude (Operational)	3050m			
Regulatory	Safety	CB / cTUVus / CE			
	EMC	CE / FCC / VCCI / ICES / RCM			
	RoHS	RoHS compliant			

- a. Typical power for ATIS traffic load.
 b. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels. c. The non-operational storage temperature specifications apply to the product without its package.

MCX623105AN-CDAT / MCX623105AE-CDAT / MCX623105AC-CDAT Specifications

Info

MCX623105AE-CDAT and MCX623105AN-CDAT have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623105AN-CDAT: Crypto disabled, Secure Boot disabled • MCX623105AE-CDAT: Crypto enabled, Secure Boot disabled • MCX623105AC-CDAT: Crypto enabled, Secure Boot enabled 		
Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)		
	Connector: Single QSFP56 Ethernet (copper and optical)		
Protocol Support	Data Rate:	Ethernet	1/10/25/40/50/100 Gb/s
	Ethernet: 100GBASE-CR2, 100GBASE-CR4, 100GBASE-KR4, 100GBASE-SR4, 100GBASE-LR4, 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR, 100GBASE-CR2, 100GBASE-KR2, 100GBASE-SR2		
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)		

Power and Airflow (a)	Voltage: 3.3Aux Maximum current: 100mA				
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0	
	Typical Power	Passive Cables	15.67W	16.48W	
	Maximum Power	Passive Cables	20.51W	22W	
	Maximum power available through QSFP56 port: 5W (each port)				
	Altitude (Operational)	3050m			
	Airflow Requirements @ 55C^(b)			Hot Aisle - Heatsink to Port	
Passive Cable		500LFM			
Active 3.5W Cable		600LFM			
Environmental	Temperature	Operational	0°C to 55°C		
		Non-operational	-40°C to 70°C		
	Humidity	Operational	10% to 85% relative humidity		
		Non-operational	10% to 90% relative humidity ^(c)		
Altitude (Operational)	3050m				
Regulatory	Safety	CB / cTUVus / CE			
	EMC	CE / FCC / VCCI / ICES / RCM			
	RoHS	RoHS compliant			
<p>a. Typical power for ATIS traffic load.</p> <p>b. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.</p> <p>c. The non-operational storage temperature specifications apply to the product without its package</p>					

MCX623106AS-CDAT / MCX623106AN-CDAT / MCX623106AC-CDAT / MCX623106AE-CDAT Specifications

i Info

MCX623106AE-CDAT has reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623106AS-CDAT: Crypto disabled, Secure Boot enabled • MCX623106AN-CDAT: Crypto disabled, Secure Boot disabled • MCX623106AC-CDAT^(a): Crypto enabled, Secure Boot enabled • MCX623106AE-CDAT: Crypto enabled, Secure Boot disabled 			
Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)			
	Connector: Dual QSFP56 Ethernet (copper and optical)			
Protocol Support	Data Rate:	Ethernet	1/10/25/40/50/100 Gb/s	
	Ethernet: 100GBASE-CR2, 100GBASE-CR4, 100GBASE-KR4, 100GBASE-SR4, 100GBASE-LR4, 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR, 100GBASE-CR2, 100GBASE-KR2, 100GBASE-SR2			
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)			
Power and Airflow ^(b)	Voltage: 3.3Aux			
	Maximum current: 100mA			
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0
	Typical Power	Passive Cables	18.7W	19.52W
	Maximum Power	Passive Cables	25.28W	26.64W
	Maximum power available through QSFP56 port: 5W (each port)			
Airflow Requirements @ 55C^(c)			Hot Aisle - Heatsink to Port	
		Passive Cable	550LFM	
		Active 2.5W Cable	700LFM	

Environmental	Temperature	Operational	0°C to 55°C
		Non-operational	-40°C to 70°C
	Humidity	Operational	10% to 85% relative humidity
		Non-operational	10% to 90% relative humidity ^(d)
	Altitude (Operational)	3050m	
Regulatory	Safety	CB / cTUVus / CE	
	EMC	CE / FCC / VCCI / ICES / RCM	
	RoHS	RoHS compliant	
<p>a. If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Adapters Product Release Notes document to learn about a potential bandwidth limitation. See Related Documents section for details on accessing the document.</p> <p>b. Typical power for ATIS traffic load.c. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.d. The non-operational storage temperature specifications apply to the product without its package</p>			

MCX623106PN-CDAT / MCX623106PC-CDAT Specifications

Info

These products have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623106PN-CDAT: Crypto disabled, Secure Boot disabled, with PPS In/Out • MCX623106PC-CDAT: Crypto enabled, Secure Boot enabled, with PPS In/Out
--------------	--

Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)		
	Connector: Dual QSFP56 Ethernet (copper and optical)		
Protocol Support	Data Rate	Ethernet	1/10/25/40/50/100 Gb/s
	Ethernet: 100GBASE-CR2, 100GBASE-CR4, 100GBASE-KR4, 100GBASE-SR4, 100GBASE-LR4, 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR, 100GBASE-CR2, 100GBASE-KR2, 100GBASE-SR2		
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)		
Power and Airflow (a)	Voltage: 3.3Aux		
	Maximum current: 100mA		
	Power	Cable Type	PCIe Gen 3.0 Gen 4.0
	Typical Power	Passive Cables	TBD 18.96W
	Maximum Power	Passive Cables	TBD 26.64W
	Maximum power available through QSFP56 port: 5W (each port)		
	Airflow Requirements @ 55C(b)	Hot Aisle - Heatsink to Port	
Passive Cable		600LFM	
NVIDIA Active 2.5W Cable	700LFM		
Environmental	Temperature	Operational	0°C to 55°C
		Non-operational	-40°C to 70°C
	Humidity	Operational	10% to 85% relative humidity
		Non-operational	10% to 90% relative humidity ^(c)
Altitude (Operational)	3050m		
Regulatory	Safety	CB / cTUVus / CE	
	EMC	CE / FCC / VCCI / ICES / RCM	
	RoHS	RoHS compliant	

- a. Typical power for ATIS traffic load.
 b. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.
 c. The non-operational storage temperature specifications apply to the product without its package

MCX623106TC-CDAT / MCX623106TN-CDAT / MCX623106GN-CDAT / MCX623106GC-CDAT Specifications

Info

MCX623106TN-CDAT and MCX623106GN-CDAT have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623106TC-CDAT^(a): Crypto enabled, Secure Boot enabled, with PPS In/Out and Enhanced-SyncE & PTP • MCX623106TN-CDAT: Crypto disabled, Secure Boot disabled, with PPS In/Out • MCX623106GN-CDAT: Crypto disabled, Secure Boot disabled, Enhanced-SyncE & PTP GM support and GNSS , PPS Out • MCX623106GC-CDAT^(a): Crypto enabled, Secure Boot enabled, with Enhanced-SyncE & PTP GM support and GNSS , PPS Out 		
Physical	<p>Size: 5.59in. x 2.71in (142.00mm x 68.90mm)</p> <p>Connector: Dual QSFP56 Ethernet (copper and optical)</p>		
Protocol Support	Data Rate:	Ethernet	1/10/25/40/50/100 Gb/s
<p>Ethernet: 100GBASE-CR2, 100GBASE-CR4, 100GBASE-KR4, 100GBASE-SR4, 100GBASE-LR4, 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR, 100GBASE-CR2, 100GBASE-KR2, 100GBASE-SR2</p>			
<p>PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)</p>			

Power and Airflow (b)	Voltage: 12V			
	Power	Cable Type	PCIe Gen 3.0	PCIe Gen 4.0
	Typical Power^(b)	Passive Cables	TBD	18.96W
	Maximum Power	Passive Cables	TBD	26.64W
	Maximum power available through QSFP56 port: 5W (each port)			
	Voltage: 3.3Aux Maximum current: 100mA			
	Airflow Requirements @ 55C^(c)			Hot Aisle - Heatsink to Port
		Passive Cable	550LFM	
		Active 2.5W Cable	700LFM	
		Active 3.5W Cable	1100LFM	
Environmental	Temperature	Operational	0°C to 55°C	
		Non-operational	-40°C to 70°C	
	Humidity	Operational	10% to 85% relative humidity	
		Non-operational	10% to 90% relative humidity ^(d)	
Altitude (Operational)	3050m			
Regulatory	Safety	CB / cTUVus / CE		
	EMC	CE / FCC / VCCI / ICES / RCM		
	RoHS	RoHS compliant		

a. If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Adapters Product Release Notes document to learn about a potential bandwidth limitation. See [Related Documents](#) section for details on accessing the document.

b. Typical power for ATIS traffic load.
c. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.

d. The non-operational storage temperature specifications apply to the product without its package

MCX623105AC-VDAT / MCX623105AN-VDAT / MCX623105AS-VDAT / MCX623105AE-VDAT

Specifications

Info

MCX623105AS-VDAT and MCX623105AE-VDAT have reached the end-of-life milestone.

Capabilities	<ul style="list-style-type: none"> • MCX623105AC-VDAT^(a): Crypto enabled, Secure Boot enabled • MCX623105AN-VDAT: Crypto disabled, Secure Boot disabled • MCX623105AS-VDAT: Crypto disabled, Secure Boot enabled • MCX623105AE-VDAT: Crypto enabled, Secure Boot disabled 		
Physical	Size: 5.59in. x 2.71in (142.00mm x 68.90mm)		
	Connector: Single QSFP56 Ethernet (copper and optical)		
Protocol Support	Data Rate:	Ethernet	1/10/25/40/50/100/200 Gb/s
	Ethernet: 200GBASE-CR4, 200GBASE-KR4, 200GBASE-SR4, 100GBASE-CR2, 100GBASE-CR4, 100GBASE-KR4, 100GBASE-SR4, 100GBASE-LR4, 50GBASE-R2, 50GBASE-R4, 40GBASE-CR4, 40GBASE-KR4, 40GBASE-SR4, 40GBASE-LR4, 40GBASE-ER4, 40GBASE-R2, 25GBASE-R, 20GBASE-KR2, 10GBASE-LR, 10GBASE-ER, 10GBASE-CX4, 10GBASE-CR, 10GBASE-KR, SGMII, 1000BASE-CX, 1000BASE-KX, 10GBASE-SR, 100GBASE-CR2, 100GBASE-KR2, 100GBASE-SR2		
	PCI Express Gen 3.0/4.0: SERDES @ 16.0GT/s, 16 lanes (2.0 and 1.1 compatible)		

Power and Airflow (b)	Voltage: 3.3Aux Maximum current: 100mA				
	Power	Cable Type	PCIe Gen 3.0	Gen 4.0	
	Typical Power	Passive Cables	TBD	16.94W	
	Maximum Power	Passive Cables	TBD	24W	
	Maximum power available through QSFP56 port: 5W (each port)				
	Airflow Requirements @ 55C^(c)			Hot Aisle - Heatsink to Port	
Passive Cable		600LFM			
Active 4.55W Cable		950LFM			
Environmental	Temperature	Operational	0°C to 55°C		
		Non-operational	-40°C to 70°C		
	Humidity	Operational	10% to 85% relative humidity		
		Non-operational	10% to 90% relative humidity ^(d)		
Altitude (Operational)	3050m				
Regulatory	Safety	CB / cTUVus / CE			
	EMC	CE / FCC / VCCI / ICES / RCM			
	RoHS	RoHS compliant			

a. If your target application for this crypto-enabled card will utilize 100Gb/s or higher bandwidth, where a substantial part of the bandwidth will be allocated for IPsec traffic, please refer to the NVIDIA ConnectX-6 Dx Adapters Product Release Notes document to learn about a potential bandwidth limitation. See [Related Documents](#) section for details on accessing the document.


b. Typical power for ATIS traffic load.c. Airflow is measured in wind tunnel. Contact NVIDIA for airflow numbers with other active modules' power levels.d. The non-operational storage temperature specifications apply to the product without its package

Board Mechanical Drawing and Dimensions

Note


All dimensions are in millimeters. Mechanical tolerances are specified for each form factor.

Dual-Port SFP28/SFP56 x8 Adapter Cards Mechanical Drawing

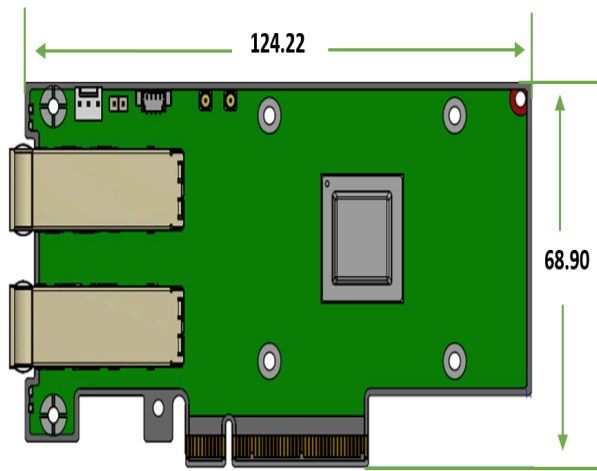


Mechanical Tolerance:
Width: +/- 0.13mm
Height: +0/-0.13mm

Dual-Port SFP28 x8 Adapter Cards with Active Cooling Mechanical Drawing

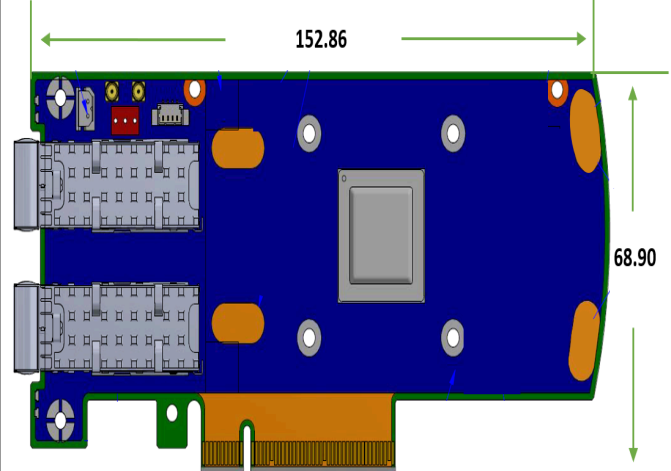


Mechanical Tolerance:
Width: +/- 0.13mm
Height: +0/-0.2mm

Dual-Port SFP28/SFP56 x16 Adapter Cards Mechanical Drawing

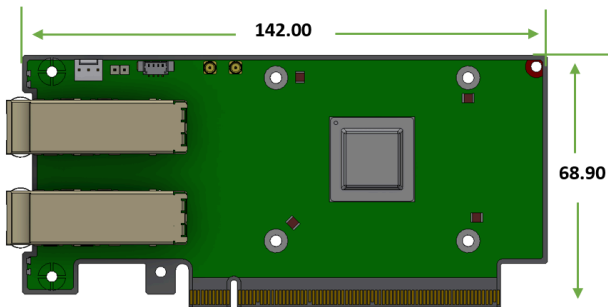


Mechanical Tolerance:
Width: +/- 0.13mm
Height: +0/-0.13mm

Single-Port QSFP56 x16 Adapter Cards Mechanical Drawing

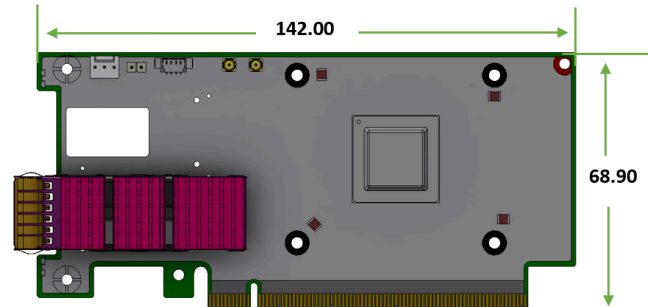

Mechanical Tolerance:
Width: +/- 0.13mm
Height: +0/-0.13mm

Dual-Port QSFP56 x16 Adapter Cards Mechanical Drawing





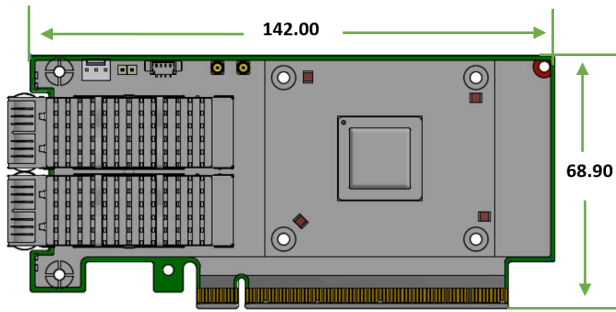


Mechanical Tolerance:
Width: +/- 0.13mm
Height: +0/-0.13mm

Bracket Mechanical Drawing

i Note

All dimensions are in millimeters. All the mechanical tolerances are +/- 0.2mm.

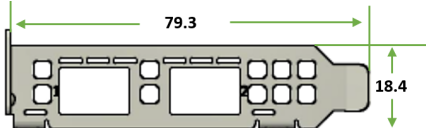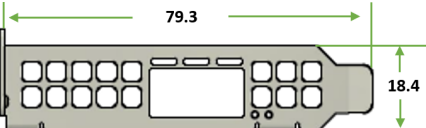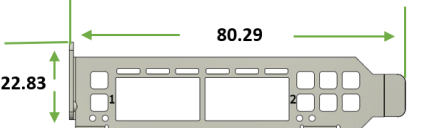Card Configuration	Short Bracket	Tall Bracket
Dual-Port SFP28/SFP56 Cards		
Single-Port QSFP56 Cards		
Dual-Port QSFP56 Cards		

Monitoring

Thermal Sensors

The adapter card incorporates the ConnectX IC, which operates in the range of temperatures between 0°C and 105°C.

Three thermal threshold definitions impact the overall system operation state:

- **Warning** – 105°C: On managed systems only: When the device crosses the 105°C threshold, a Warning Threshold message is issued by the management SW, indicating to system administration that the card has crossed the warning threshold. Note that this temperature threshold does not require nor lead to any action by hardware (such as adapter card shutdown).
- **Critical** – 115°C: When the device crosses this temperature, the firmware automatically shuts down the device.
- **Emergency** – 130°C: If the firmware fails to shut down the device upon crossing the critical threshold, the device automatically shuts down upon crossing the emergency (130°C) threshold.

The card's thermal sensors can be read through the system's SMBus. The user can read these thermal sensors and adapt the system airflow following the readouts and the needs of the above-mentioned IC thermal requirements.

Adapter Card Heatsink

The heatsink is attached to the ConnectX-6 Dx IC in order to dissipate the heat. It is attached either by using four spring-loaded push pins that insert into four mounting holes, or by screws. ConnectX-6 Dx IC has a thermal shutdown safety mechanism that automatically shuts down the ConnectX-6 Dx card in cases of high-temperature event, improper thermal coupling or heatsink removal.

For the required airflow (LFM) per OPN, please refer to the [Specifications](#) chapter.

Finding the MAC on the Adapter Card

Each NVIDIA adapter card has a different identifier printed on the label: serial number and the card MAC for the Ethernet protocol.

i Note

The product revisions indicated on the labels in the following figures do not necessarily represent the latest revisions of the cards.


MCX623105AS-VDAT Board Label Example









Compliance

The NVIDIA ConnectX is compliant with the regulations listed in this section.

Country	Compliance	Compliance Mark
United States	<p>Federal Communications Commission (FCC) FCC Marking (Class A)</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including any interference that may cause undesired operation of the device.</p> <p>NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p> <p>California Department of Toxic Substances Control: Perchlorate Material - special handling may apply. Refer to www.dtsc.ca.gov/perchlorate.</p>	

Country	Compliance	Compliance Mark
United States/Canada	<p>TÜV Rheinland of North America is accredited as a Nationally Recognized Testing Laboratory (NRTL), by OSHA (The Occupational Safety and Health Administration) in the United States, and as a Product Certification Body by SCC (Standards Council of Canada) in Canada.</p> <p>Refer to https://www.tuv.com/usa/en/ctuvus-certification.html</p>	 <p>C</p>
Canada	<p>Innovation, Science and Economic Development Canada (ISED) CAN ICES-3(A)/NMB-3(A)</p> <p>The Class A digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulation.</p> <p>Cet appareil numérique de la class A respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.</p>	

Country	Compliance	Compliance Mark
<p>CE</p>	<p>European Conformity; Conformité Européenne (CE) This is a Class A product. In a domestic environment this product may cause radio frequency interference in which case the user may be required to take adequate measures. This device bears the CE mark in accordance with Directive 2014/53/EU. This device complies with the following Directives:</p> <ul style="list-style-type: none"> • EMC Directive A, I.T.E Equipment. • Low Voltage Directive for electrical safety. • RoHS Directive for hazardous substances. • Energy-related Products Directive (ErP). <p>The full text of EU declaration of conformity is available at the following URL: http://www.nvidia.com/support A copy of the Declaration of Conformity to the essential requirements may be obtained directly from NVIDIA GmbH (Bavaria Towers – Blue Tower, Einsteinstrasse 172, D-81677 Munich, Germany).</p>	  
<p>Australia and New Zealand</p>	<p>Australian Communications and Media Authority This product meets the applicable EMC requirements for Class A, I.T.E equipment.</p>	
<p>Brazil</p>	<p>INMETRO</p>	<p>Segurança</p>   INMETRO UL BR OCP 00


Country	Compliance	Compliance Mark
Japan	<p>Voluntary Control Council for Interference (VCCI)</p> <p>This is a Class A product. In a domestic environment this product may cause radio interference, in which case the user may be required to take corrective actions. VCCI-A.</p> <p>2008年、日本における製品含有表示方法、JIS C 0950が公示されました。製造者は、2006年7月1日以降に提供される電子機器の特定化学物質の含有に付きまして情報提供を求められました。</p> <p>製品の部材表示に付きましては、以下をご覧ください。</p> <p>A Japanese regulatory requirement, defined by specification JIS C 0950, 2008, mandates that manufacturers provide Material Content Declarations for certain categories of electronic products offered for sale after July 1, 2006.</p>	 <p>この装置は、クラスAを使用すると電波妨害を引起こす場合があります。</p>

Country	Compliance	Compliance Mark																																																																									
Japan	<p>Japan RoHS Material Content Declaration 日本工業規格 JIS C 0950:2008により、2006年 7月 1日以降に用いられる特定分野の部品および電子部品について、製造者による含有物の表示が義務付けられます。部品名称：リバ</p> <table border="1"> <thead> <tr> <th>主な部品</th> <th>Pb</th> <th>Hg</th> <th>Cd</th> <th>Cr(VI)</th> <th>PBB</th> <th>PBDE</th> </tr> </thead> <tbody> <tr> <td>筐体</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>プリント基板</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>プロセッサ</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>マザーボード</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>電源</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>システムメモリ</td> <td>除外 目</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </tbody> </table>	主な部品	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	筐体	除外 目	0	0	0	0	0	プリント基板	除外 目	0	0	0	0	0	プロセッサ	除外 目	0	0	0	0	0	マザーボード	除外 目	0	0	0	0	0	電源	除外 目	0	0	0	0	0	システムメモリ	除外 目	0	0	0	0	0	<p>Material Content Declaration A Japanese regulatory specification JIS C 0950:2008 requires manufacturers provide the following information for certain categories of products for sale after July 1, 2006: Product Model Number Material Content Declaration Major Classification Pb</p> <table border="1"> <thead> <tr> <th>Major Classification</th> <th>Pb</th> </tr> </thead> <tbody> <tr> <td>Chassis</td> <td>Exempt</td> </tr> <tr> <td>PCA</td> <td>Exempt</td> </tr> <tr> <td>Processor</td> <td>Exempt</td> </tr> <tr> <td>Motherboard</td> <td>Exempt</td> </tr> <tr> <td>Power supply</td> <td>Exempt</td> </tr> <tr> <td>System Memory</td> <td>Exempt</td> </tr> <tr> <td>Hard Disk Drive</td> <td>Exempt</td> </tr> <tr> <td>Mechanical Parts (Fans, Heatsinks, Bezels..)</td> <td>Exempt</td> </tr> <tr> <td>Cables / Connectors</td> <td>Exempt</td> </tr> <tr> <td>Soldering Material</td> <td>0</td> </tr> <tr> <td>Flux, Solder Paste, Labels, Consumables</td> <td>0</td> </tr> </tbody> </table>	Major Classification	Pb	Chassis	Exempt	PCA	Exempt	Processor	Exempt	Motherboard	Exempt	Power supply	Exempt	System Memory	Exempt	Hard Disk Drive	Exempt	Mechanical Parts (Fans, Heatsinks, Bezels..)	Exempt	Cables / Connectors	Exempt	Soldering Material	0	Flux, Solder Paste, Labels, Consumables	0
主な部品	Pb	Hg	Cd	Cr(VI)	PBB	PBDE																																																																					
筐体	除外 目	0	0	0	0	0																																																																					
プリント基板	除外 目	0	0	0	0	0																																																																					
プロセッサ	除外 目	0	0	0	0	0																																																																					
マザーボード	除外 目	0	0	0	0	0																																																																					
電源	除外 目	0	0	0	0	0																																																																					
システムメモリ	除外 目	0	0	0	0	0																																																																					
Major Classification	Pb																																																																										
Chassis	Exempt																																																																										
PCA	Exempt																																																																										
Processor	Exempt																																																																										
Motherboard	Exempt																																																																										
Power supply	Exempt																																																																										
System Memory	Exempt																																																																										
Hard Disk Drive	Exempt																																																																										
Mechanical Parts (Fans, Heatsinks, Bezels..)	Exempt																																																																										
Cables / Connectors	Exempt																																																																										
Soldering Material	0																																																																										
Flux, Solder Paste, Labels, Consumables	0																																																																										


Country	Compliance							Compliance Mark	
	ハ ド デ イ ス ク ド ラ イ ブ	除 外 目	0	0	0	0	0	Major Classification	Pb
	機 部 品 (フ ァ ン 、 ヒ ト シ ン ク 、 ベ ゼ ル..)	除 外 目	0	0	0	0	0		
	ケ ブル / コ ネ ク タ	除 外 目	0	0	0	0	0		
	は ん だ 付 け 材 料	0	0	0	0	0	0		


Country	Compliance							Compliance Mark
	フラックス、クリムはんだ、ラベル、その他消耗品	0	0	0	0	0	0	
<p>1. 「0」は、特定化学物質の含有率が日本規格 JIS C 0950:2008 に示されている含有率基準より低いことを示します。</p> <p>2. 「除外項目」は、特定化学物質が含有物質の除外項目に該当するため、特定化学物質について、日本規格 JIS C 0950:2008 に基づく含有物質の表示が不要であることを示します。</p> <p>3. 「0.1wt%超」または「0.01wt%超」は、特定化学物質の含有率が日本規格 JIS C 0950:2008 に示されている含有率基準を超えていることを示します。</p>								


Country	Compliance	Compliance Mark																																																																																																														
South Korea	<p>Korean Agency for Technology and Standards (KATS) Class A Equipment (Industrial Broadcasting & Communication Equipment). This equipment Industrial (Class A) electromagnetic wave suitability equipment and seller or user should take notice of it, and this equipment is to be used in the places except for home. Korea RoHS Material Content Declaration</p> <table border="1" data-bbox="613 709 1162 1329"> <tr> <td colspan="4" style="text-align: center;">확인 및 평가 양식은 제품에 포함 된 유해 물질의 허용 기준의 준수에 관한</td> </tr> <tr> <td rowspan="3">문 준비</td> <td>상호 :</td> <td>엔비디아홀딩스 리미티드(공입소)</td> <td>법인등록번호</td> </tr> <tr> <td>대표자성명</td> <td>카렌테레사번즈</td> <td>사업자등록번호:</td> </tr> <tr> <td>주소</td> <td colspan="2">서울특별시 강남구 영동대로 511, 2101호 (삼성동,</td> </tr> <tr> <td colspan="4" style="text-align: center;">제품 내용</td> </tr> <tr> <td>제품의 종류</td> <td>해당없음</td> <td>제품명(규격)</td> <td>해당없음</td> </tr> <tr> <td>세부모델명(번호)</td> <td>해당없음</td> <td>제품출시일</td> <td>해당없음</td> </tr> <tr> <td>제품의 중량</td> <td>해당없음</td> <td>제조, 수입업자</td> <td>엔비디아</td> </tr> <tr> <td colspan="4">엔비디아의 그래픽 카드제품은 전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령 제 11조 제 1항에 의거한 법 시행령규칙 제 3조에따른 유해물질 함유 기준을 확인 및 평가한 결과, 이를 준수하였음을 공표합니다.</td> </tr> <tr> <td colspan="4">구비서류 : 없음</td> </tr> <tr> <td colspan="4">작성방법</td> </tr> <tr> <td colspan="4">① 제품의 종류는 "전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령" 제 8조 제 1항 및 제 2항에 따른 품목별로 구분하여 기재합니다.</td> </tr> <tr> <td colspan="4">② 전기 전자 제품의 경우 모델명 (번호), 자동차의 경우, 제원관리번호를 기재합니다.</td> </tr> <tr> <td colspan="4">③ 해당제품의 제조업자 또는 수입업자를 기재합니다.</td> </tr> </table> <table border="1" data-bbox="578 1335 1011 1827"> <tr> <td colspan="4" style="text-align: center;">Confirmation and Evaluation Form Concerning the Adherence to Acceptable Standards of Hazardous Materials Contained in Products</td> </tr> <tr> <td rowspan="3">Statement Prepared by</td> <td>Company Name:</td> <td>Nvidia HongKong Holding Ltd.Korea branch</td> <td>Corporate Identification Number:</td> </tr> <tr> <td>Name of Company Representative:</td> <td>Karen Theresa Burns</td> <td>Business Registration Number:</td> </tr> <tr> <td>Address:</td> <td colspan="2">2788 San Tomas Expressway, Santa Clara, CA 95051</td> </tr> <tr> <td colspan="4" style="text-align: center;">Product Information</td> </tr> <tr> <td>Product Category:</td> <td>N/A</td> <td>Name of Product:</td> <td>N/A</td> </tr> <tr> <td>Detailed Product Model Name (Number):</td> <td>N/A</td> <td>Date of first market release:</td> <td>N/A</td> </tr> <tr> <td>Weight of Product:</td> <td>N/A</td> <td>Manufacturer and/or Importer:</td> <td>NVIDIA Corporation</td> </tr> <tr> <td colspan="4">This for is publicly certify That NVIDIA Company has undergone the confirmation and evaluation procedures for the acceptable amounts of hazardous materials contained in graphic card according to the regulations stipulated in Article 3 of the "Status on the Recycling of Electrical and Electronic Products, and Automobiles" and that company has graphic card adhered to the Enforcement Regulations of Article 11, Item 1 of the statute.</td> </tr> <tr> <td colspan="4">Attachment: None</td> </tr> <tr> <td colspan="4">* Preparing the Form</td> </tr> <tr> <td colspan="4">① Please indicate the product category according to the categories listed in Article 8, Items 1 and 2 of the "Enforcement Ordinance of the Statute on the Recycling of Electrical, Electronic and Automobile Materials"</td> </tr> <tr> <td colspan="4">② For electrical and electronic products, please indicate the Model Name (and number). For automobiles, please indicate the Vehicle Identification Number.</td> </tr> <tr> <td colspan="4">③ Please indicate the name of manufacturer and/or importer of the product.</td> </tr> </table>	확인 및 평가 양식은 제품에 포함 된 유해 물질의 허용 기준의 준수에 관한				문 준비	상호 :	엔비디아홀딩스 리미티드(공입소)	법인등록번호	대표자성명	카렌테레사번즈	사업자등록번호:	주소	서울특별시 강남구 영동대로 511, 2101호 (삼성동,		제품 내용				제품의 종류	해당없음	제품명(규격)	해당없음	세부모델명(번호)	해당없음	제품출시일	해당없음	제품의 중량	해당없음	제조, 수입업자	엔비디아	엔비디아의 그래픽 카드제품은 전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령 제 11조 제 1항에 의거한 법 시행령규칙 제 3조에따른 유해물질 함유 기준을 확인 및 평가한 결과, 이를 준수하였음을 공표합니다.				구비서류 : 없음				작성방법				① 제품의 종류는 "전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령" 제 8조 제 1항 및 제 2항에 따른 품목별로 구분하여 기재합니다.				② 전기 전자 제품의 경우 모델명 (번호), 자동차의 경우, 제원관리번호를 기재합니다.				③ 해당제품의 제조업자 또는 수입업자를 기재합니다.				Confirmation and Evaluation Form Concerning the Adherence to Acceptable Standards of Hazardous Materials Contained in Products				Statement Prepared by	Company Name:	Nvidia HongKong Holding Ltd.Korea branch	Corporate Identification Number:	Name of Company Representative:	Karen Theresa Burns	Business Registration Number:	Address:	2788 San Tomas Expressway, Santa Clara, CA 95051		Product Information				Product Category:	N/A	Name of Product:	N/A	Detailed Product Model Name (Number):	N/A	Date of first market release:	N/A	Weight of Product:	N/A	Manufacturer and/or Importer:	NVIDIA Corporation	This for is publicly certify That NVIDIA Company has undergone the confirmation and evaluation procedures for the acceptable amounts of hazardous materials contained in graphic card according to the regulations stipulated in Article 3 of the "Status on the Recycling of Electrical and Electronic Products, and Automobiles" and that company has graphic card adhered to the Enforcement Regulations of Article 11, Item 1 of the statute.				Attachment: None				* Preparing the Form				① Please indicate the product category according to the categories listed in Article 8, Items 1 and 2 of the "Enforcement Ordinance of the Statute on the Recycling of Electrical, Electronic and Automobile Materials"				② For electrical and electronic products, please indicate the Model Name (and number). For automobiles, please indicate the Vehicle Identification Number.				③ Please indicate the name of manufacturer and/or importer of the product.				<p>R-R-WT1-P3687</p> <table border="1" data-bbox="1190 974 1474 1115"> <tr> <td style="text-align: center;">A0 00 (000 000 0000)</td> <td style="text-align: center;">0 000 000 000 000, C</td> </tr> </table>	A0 00 (000 000 0000)	0 000 000 000 000, C
확인 및 평가 양식은 제품에 포함 된 유해 물질의 허용 기준의 준수에 관한																																																																																																																
문 준비	상호 :	엔비디아홀딩스 리미티드(공입소)	법인등록번호																																																																																																													
	대표자성명	카렌테레사번즈	사업자등록번호:																																																																																																													
	주소	서울특별시 강남구 영동대로 511, 2101호 (삼성동,																																																																																																														
제품 내용																																																																																																																
제품의 종류	해당없음	제품명(규격)	해당없음																																																																																																													
세부모델명(번호)	해당없음	제품출시일	해당없음																																																																																																													
제품의 중량	해당없음	제조, 수입업자	엔비디아																																																																																																													
엔비디아의 그래픽 카드제품은 전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령 제 11조 제 1항에 의거한 법 시행령규칙 제 3조에따른 유해물질 함유 기준을 확인 및 평가한 결과, 이를 준수하였음을 공표합니다.																																																																																																																
구비서류 : 없음																																																																																																																
작성방법																																																																																																																
① 제품의 종류는 "전기 전자제품 및 자동차의 자원순환에 관한 법률 시행령" 제 8조 제 1항 및 제 2항에 따른 품목별로 구분하여 기재합니다.																																																																																																																
② 전기 전자 제품의 경우 모델명 (번호), 자동차의 경우, 제원관리번호를 기재합니다.																																																																																																																
③ 해당제품의 제조업자 또는 수입업자를 기재합니다.																																																																																																																
Confirmation and Evaluation Form Concerning the Adherence to Acceptable Standards of Hazardous Materials Contained in Products																																																																																																																
Statement Prepared by	Company Name:	Nvidia HongKong Holding Ltd.Korea branch	Corporate Identification Number:																																																																																																													
	Name of Company Representative:	Karen Theresa Burns	Business Registration Number:																																																																																																													
	Address:	2788 San Tomas Expressway, Santa Clara, CA 95051																																																																																																														
Product Information																																																																																																																
Product Category:	N/A	Name of Product:	N/A																																																																																																													
Detailed Product Model Name (Number):	N/A	Date of first market release:	N/A																																																																																																													
Weight of Product:	N/A	Manufacturer and/or Importer:	NVIDIA Corporation																																																																																																													
This for is publicly certify That NVIDIA Company has undergone the confirmation and evaluation procedures for the acceptable amounts of hazardous materials contained in graphic card according to the regulations stipulated in Article 3 of the "Status on the Recycling of Electrical and Electronic Products, and Automobiles" and that company has graphic card adhered to the Enforcement Regulations of Article 11, Item 1 of the statute.																																																																																																																
Attachment: None																																																																																																																
* Preparing the Form																																																																																																																
① Please indicate the product category according to the categories listed in Article 8, Items 1 and 2 of the "Enforcement Ordinance of the Statute on the Recycling of Electrical, Electronic and Automobile Materials"																																																																																																																
② For electrical and electronic products, please indicate the Model Name (and number). For automobiles, please indicate the Vehicle Identification Number.																																																																																																																
③ Please indicate the name of manufacturer and/or importer of the product.																																																																																																																
A0 00 (000 000 0000)	0 000 000 000 000, C																																																																																																															

Country	Compliance	Compliance Mark
China	<p>China Compulsory Certificate No certification is needed for China. The NVIDIA DGX H100/H200 system is a server with power consumption greater than 1.3 kW. China RoHS Material Content Declaration</p> 	<p>焊接金属 Soldering material</p> <hr/> <p>助焊剂，锡膏，标签及其他耗材 Flux, Solder Paste, label and other consumable materials</p> <hr/> <p>本表格依据SJ/T 11364-2014 The table according to SJ/T 11364-2014</p> <p>O：表示该有害物质在该部件所规定的限量要求以下。 O: Indicates that this hazardous materials for this part is below the limit requirement in GB/T 18761.</p> <p>X：表示该有害物质至少在该部件所规定的限量要求以上。 X: Indicates that this hazardous homogeneous materials used in this part is above the limit requirement in GB/T 18761.</p> <p>All parts named in this table are in compliance with the European Union's RoHS Legislation.</p> <p>Note: The referenced Environmental conditions are determined according to normal temperature and humidity.</p>

Country	Compliance	Compliance Mark												
Taiwan	Bureau of Standards, Metrology & Inspection (BSMI)	 <p>R33088 RoHS</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p style="text-align: right;">警</p> <p>此為甲類資訊技術設備，於居住環境下，使用者會被要求採取某些</p> </div> <p>報驗義務人：</p> <p>香港商輝達香港控股有</p> <p>臺北市內湖區基湖路8</p>												
	Taiwan RoHS Material Content Declaration	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">Declaration of the</td> </tr> <tr> <td style="text-align: center;">單元 Parts</td> </tr> <tr> <td>機箱 Chassis</td> </tr> <tr> <td>印刷電路板 PCB</td> </tr> <tr> <td>處理器 Processor</td> </tr> <tr> <td>主板 Motherboard</td> </tr> <tr> <td>電源設備 Power supply</td> </tr> <tr> <td>存儲設備 System memory</td> </tr> <tr> <td>硬盤驅動器 Hard drive</td> </tr> <tr> <td>機械部件 (風扇、散熱器、面板等) Mechanical parts (fan, heat sink, bezel...)</td> </tr> <tr> <td>線材/連接器 Cables/Connectors</td> </tr> <tr> <td>焊接金屬 Soldering material</td> </tr> <tr> <td>助焊劑、錫膏、標籤及其他耗材 Flux, Solder Paste, label and other consumable materials</td> </tr> </table> <p>備註1：O 表示該組件物質未超出百分比含量標準 Note 1: O indicates that the percentage content of 備註2：- 表示該組件物質為排除項目 Note 2: - indicates that the restricted substance con</p> <p>此表中所有名稱中含“-”的部件均符合歐盟 RoHS 立法 All parts named in this table with an “-” are in complian</p> <p>注：請按使用期限的參考標準讀取此與產品正常工作的端 Note: The referenced Environmental Protection Use Pe as temperature and humidity.</p>	Declaration of the	單元 Parts	機箱 Chassis	印刷電路板 PCB	處理器 Processor	主板 Motherboard	電源設備 Power supply	存儲設備 System memory	硬盤驅動器 Hard drive	機械部件 (風扇、散熱器、面板等) Mechanical parts (fan, heat sink, bezel...)	線材/連接器 Cables/Connectors	焊接金屬 Soldering material
Declaration of the														
單元 Parts														
機箱 Chassis														
印刷電路板 PCB														
處理器 Processor														
主板 Motherboard														
電源設備 Power supply														
存儲設備 System memory														
硬盤驅動器 Hard drive														
機械部件 (風扇、散熱器、面板等) Mechanical parts (fan, heat sink, bezel...)														
線材/連接器 Cables/Connectors														
焊接金屬 Soldering material														
助焊劑、錫膏、標籤及其他耗材 Flux, Solder Paste, label and other consumable materials														

Country	Compliance	Compliance Mark
Russia/Kazakhstan/Belarus	<p>Customs Union Technical Regulations (CU TR) This device complies with the technical regulations of the Customs Union (CU TR) ТЕХНИЧЕСКИЙ РЕГЛАМЕНТ ТАМОЖЕННОГО СОЮЗА О безопасности низковольтного оборудования (ТР ТС 004/2011) ТЕХНИЧЕСКИЙ РЕГЛАМЕНТ ТАМОЖЕННОГО СОЮЗА Электромагнитная совместимость технических средств (ТР ТС 020/2011) Технический регламент Евразийского экономического союза “Об ограничении применения опасных веществ в изделиях электротехники и радиоэлектроники” (ТР ЕАЭС 037/2016) Federal Agency of communication (FAC) This device complies with the rules set forth by Federal Agency of Communications and the Ministry of Communications and Mass Media. Federal Security Service notification has been filed.</p>	
Israel	<p>ודא שלמות ותקינות כבל החשמל והתקע אין להכניס או להוציא את התקע מרשת החשמל בידיים רטובות . אין לפתוח את המכשיר , במקרה של בעיה כלשהי יש לפנות למעבדת השירות הקרובה. יש להרחיק את המכשיר ממזלם . במקרה של ריח מוזר, רעשים שמקורם במכשיר , יש לנתקו מיידית מרשת החשמל ולפנות למעבדת שירות המכשיר מיועד לשימוש בתוך המבנה , ולא לשימוש חיצוני ולא לשימוש בסביבה לוח. אין לחתוך, לשבור, ולעקם את הכבל החשמל. אין להניח חפצים על הכבל החשמל או להניח לו להתחמם יותר על המידה , שכן עלול לגרום לתק, דליקה או התחשמלות . יש להקפיד לזרוק את התקן המתוק במצב תפועלי מוכן לשימוש. אזהרה: אין להחליף את כבל הזינה בתחליפים לא מקוריים, חיבור לקוי עלול לגרום להתחשמלות המשתמש. בשימוש על כבל מאריך יש לוודא תקינות מוליך הארקה שבכבל .</p>	

Country	Compliance	Compliance Mark
India	<p>Bureau of India Standards (BIS) Authenticity may be verified by visiting the Bureau of Indian Standards website at http://www.bis.gov.in.</p> <p>India RoHS Compliance Statement This product, as well as its related consumables and spares, complies with the reduction in hazardous substances provisions of the “India E-waste (Management and Handling) Rule 2016”. It does not contain lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for where allowed pursuant to the exemptions set in Schedule 2 of the Rule.</p>	
South Africa	<p>South African Bureau of Standards (SABS) This device complies with the following SABS Standards: SANS 2332: 2017/CISPR 32:2015 SANS 2335:2018/ CISPR 35:2016 National Regulator of Compulsory Specification (NRCS) This device complies with following standard under VC 8055: SANS IEC 60950-1</p>	

Country	Compliance	Compliance Mark
Great Britain (England, Wales, and Scotland)	<p>UK Conformity Assessed This device complies with the following Regulations:</p> <ul style="list-style-type: none"> • SI 2016/1091: Electromagnetic Compatibility (EMC) • SI 2016/1101: The Low Voltage Electrical Equipment (Safety) • SI 2012/3032: The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (As Amended) <p>A copy of the Declaration of Conformity to the essential requirements may be obtained directly from NVIDIA Ltd. (100 Brook Drive, 3rd Floor Green Park, Reading RG2 6UJ, United Kingdom)</p>	

Document Revision History

Date	Description of Changes
Mar. 2025	Updated that LED behavior in Networking Ports LEDs Interface Updated the Legacy (EOL) Ordering Part Numbers
Jan. 2023	Updated the dual-port QSFP56 bracket mechanical drawing in Specifications
Nov. 2023	Added the 100GBASE-CR2 protocol in Specifications tables
Jul. 2023	Updated Ordering Part Numbers table
Jun. 2023	Added important notes on selected OPNs in Ordering Part Numbers and the Specifications chapter
May. 2023	Updated Specifications to include non-operational storage temperature specifications
Aug. 2022	Updated the "Legacy (EOL) Ordering Part Numbers" table.
Jun. 2022	Updated board and bracket mechanical drawings and mechanical tolerances.
Mar. 2022	Added the following OPNs to relevant sections: <ul style="list-style-type: none">• MCX621202AS-ADAT• MCX621202AC-ADAT
Jan. 2022	Added table "Legacy (EOL) Ordering Part Numbers"
Sept. 2021	Added OPN MCX623105AC-CDAT Updated Specifications table format.

Date	Description of Changes
Aug. 2021	Added the following OPNs: <ul style="list-style-type: none"> • MCX623106TN-CDAT • MCX623106TC-CDAT • MCX623106GN-CDAT • MCX623106GC-CDAT • MCX621202AS-ADAT • MCX621202AC-ADAT
Jun. 2021	Updated Interfaces .
Mar. 2021	Updated Troubleshooting .
Mar. 2021	Updated Protocol Support in Specifications.
Mar. 2021	Added OPN MCX623102AS-ADAT
Feb. 2021	Updated MCX623102A[C/N/S/E]-GDAT airflow numbers.
Dec. 2020	Updated cards' dimensions for MCX621102A[C/E/N]-ADAT.
Sep. 2020	Updated power numbers in Specifications .
Aug. 2020	Updated power numbers in Specifications .
Aug. 2020	Updated LED specifications in Specifications .
Jul. 2020	Updated power numbers in Specifications .
Jul. 2020	Updated power numbers in Specifications .

Date	Description of Changes
Jun. 2020	<p>Updated airflow numbers. Added the following OPNs to all relevant sections:</p> <ul style="list-style-type: none"> • MCX621102AE-ADAT • MCX623102AS-GDAT • MCX623102AC-GDAT • MCX623106AE-CDAT • MCX623106PC-CDAT • MCX623106PN-CDAT • MCX623106PE-CDAT • MCX623105AE-VDAT
May. 2020	Updated power numbers.
Feb. 2020	<p>Added the following OPNs to all relevant sections:</p> <ul style="list-style-type: none"> • MCX623106AS-CDAT • MCX623105AS-VDAT • MCX623102AS-GDAT
Nov. 2019	First release

Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. NVIDIA Corporation ("NVIDIA") makes no representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NVIDIA shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any Material (defined below), code, or functionality.

NVIDIA reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice.

Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NVIDIA products are sold subject to the NVIDIA standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NVIDIA and customer ("Terms of Sale"). NVIDIA hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NVIDIA product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

NVIDIA products are not designed, authorized, or warranted to be suitable for use in medical, military, aircraft, space, or life support equipment, nor in applications where failure or malfunction of the NVIDIA product can reasonably be expected to result in personal injury, death, or property or environmental damage. NVIDIA accepts no liability for inclusion and/or use of NVIDIA products in such equipment or applications and therefore such inclusion and/or use is at customer's own risk.

NVIDIA makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NVIDIA. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer's product designs may affect the quality and reliability of the NVIDIA product and may result in additional or different conditions and/or requirements beyond those contained in this document. NVIDIA accepts no liability related to any default, damage, costs, or problem which may be based on or attributable to: (i) the use of the NVIDIA product in any manner that is contrary to this document or (ii) customer product designs.

No license, either expressed or implied, is granted under any NVIDIA patent right, copyright, or other NVIDIA intellectual property right under this document. Information published by NVIDIA regarding third-party products or services does not constitute a license from NVIDIA to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from NVIDIA under the patents or other intellectual property rights of NVIDIA.

Reproduction of information in this document is permissible only if approved in advance by NVIDIA in writing, reproduced without alteration and in full compliance with all applicable export laws and regulations, and accompanied by all associated conditions, limitations, and notices.

THIS DOCUMENT AND ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL NVIDIA BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF

ANY USE OF THIS DOCUMENT, EVEN IF NVIDIA HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Notwithstanding any damages that customer might incur for any reason whatsoever, NVIDIA's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms of Sale for the product.

Trademarks

NVIDIA and the NVIDIA logo are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

© Copyright 2026, NVIDIA. PDF Generated on 03/05/2026