J4858C-LEG HP 1000BASE-SX SFP MMF 850NM 550M REACH LC



#### J4858C-LEG

1.25Gbps SFP Transceiver

#### **Features**

- Up to 1.25Gb/s data links
- Duplex LC connector
- Hot-pluggable SFP footprint
- 850nm VCSEL Laser transmitter
- RoHS compliant and Lead Free
- Up to 550m on 50/125μm MMF
  Up to 500m on 62.5/125μm MMF
- Metal enclosure for lower EMI
- Single +3.3V power supply
- Low power dissipation <800mW</li>
- Commercial and industrial operating temperature optional
- SFP MSA SFF-8074i Complaint



## **Applications**

- 1000Base-SX
- 1x Fibre Channel

#### **Product Description**

Legrand's J4858C-LEG Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 1.25Gbps/1.06Gbps and support distance up to 550m with MMF.

Legrand's SFP transceivers are RoHS compliant and lead-free.

## **Regulatory Compliance**


- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015.
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2.
- Immunity compatible with IEC 61000-4-3.
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B.
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2.
- RoHs compliant with 2002/95/EC 4.1&4.2 2005/747/EC.

## **Pin Descriptions**

| Pin | Symbol      | Name/Descriptions  | Ref. |
|-----|-------------|--|------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | TX Fault    | Transmitter Fault.   |      |
| 3   | TX Disable  | Transmitter Disable. Laser output disabled on high or open.    | 2    |
| 4   | MOD DEF (2) | Module Definition 2. Data line for Serial ID.                  | 3    |
| 5   | MOD_DEF (1) | Module Definition 1. Clock line for Serial ID.                 | 3    |
| 6   | MOD_DEF (0) | Module Definition 0. Grounded within the module.               | 3    |
| 7   | Rate Select | No connection required.  |      |
| 8   | LOS         | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-         | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+         | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | VccR        | Receiver Power Supply.   |      |
| 16  | VccT        | Transmitter Power Supply.                                      |      |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+         | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-         | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground)               | 1    |


### Notes:

- 1. Circuit ground is internally isolated from chassis ground.
- 2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable <0.8V.
- 3. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
- 4. LOS is open collector output. Should be pulled up with 4.7k-10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

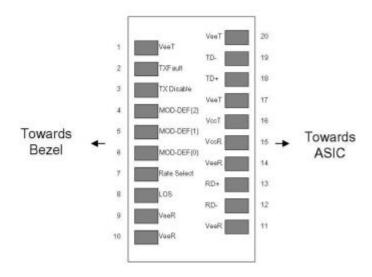

Pin-out of connector Block on Host board

## **Recommend Circuit Schematic**

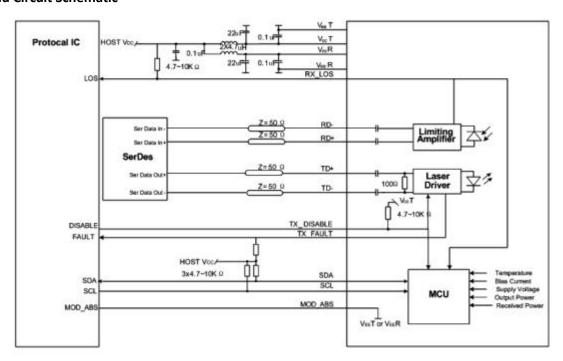

## **Absolute Maximum Ratings**

| Parameter           | Symbol | Min. | Max. | Unit |
|---------------------|--------|------|------|------|
| Supply Voltage      | Vcc    | -0.5 | 4.0  | V    |
| Storage Temperature | TS     | -40  | 85   | °C   |
| Operating Humidity  | RH     | 5    | 95   | %    |

# **Recommended Operating Conditions**

| Parameter                                  | Symbol | Min. | Тур.  | Max. | Unit |
|--|--------|------|-------|------|------|
| Power Supply Voltage                       | Vcc    | 3.13 | 3.30  | 3.47 | ٧    |
| Power Supply Current                       | Icc    |      |       | 250  | mA   |
| Case Operating Temperature –<br>Commercial | Тс     | 0    |       | 70   | °C   |
| Case Operating Temperature –<br>Industrial | Ti     | -40  |       | 85   | °C   |
| Data Rate (Gigabit Ethernet)               |        |      | 1.25  |      | Gbps |
| Data Rate (Fibre Channel)                  |        |      | 1.063 |      | Gbps |
| 50/125μm MMF                               | L      |      |       | 550  | m    |

# Electrical Characteristics (TOP=25°C, Vcc=3.3V)

| Parameter                      | Symbol   | Min.    | Тур. | Max.    | Unit | Notes |
|--------------------------------|----------|---------|------|---------|------|-------|
| Transmitter                    |          |         |      |         |      |       |
| Input differential impedance   | Rin      |         | 100  |         | Ω    | 1     |
| Single ended data input swing  | Vin, pp  | 250     |      | 1200    | mV   |       |
| TX Disable-High                |          | Vcc-1.3 |      | Vcc     | V    |       |
| TX Disble-Low                  |          | Vee     |      | Vee+0.8 | V    |       |
| TX Fault-High                  |          | Vcc-0.5 |      | Vcc     | V    |       |
| TX Fault-Low                   |          | Vee     |      | Vee+0.5 | V    |       |
| Receiver                       |          |         |      |         |      |       |
| Single ended data output swing | Vout, pp | 300     | 400  | 800     | mV   | 2     |
| Data output rise time          | tr       |         |      | 175     | ps   | 3     |
| Data output fall time          | tf       |         |      | 175     | ps   | 3     |
| LOS-High                       |          | Vcc-0.5 |      | Vcc     | V    |       |
| LOS-Low                        |          | Vee     |      | Vee+0.5 | V    |       |

## Notes:

- 1. AC coupled.
- 2. Into 100 ohm differential termination.
- 3. 20% 80%

# **Optical and Electrical Characteristics**


| Parameter                | Symbol            | Min. | Тур. | Max. | Unit | Notes |  |
|--------------------------|-------------------|------|------|------|------|-------|--|
| Transmitter              |                   |      |      |      |      |       |  |
| Average Output Power     | РО                | -9   |      | -4   | dBm  | 1     |  |
| Optical Wavelength       | λ                 | 830  | 850  | 860  | nm   |       |  |
| Spectral Width           | σ                 |      |      | 0.85 | nm   |       |  |
| Optical Rise/Fall Time   | tr/tf             |      |      | 260  | ps   | 2     |  |
| Total Jitter             | TJ                |      |      | 200  | ps   |       |  |
| Optical Extinction Ratio | ER                | 9    |      |      | dB   |       |  |
| Receiver                 | Receiver          |      |      |      |      |       |  |
| Receiver Sensitivity     | RSENS             |      |      | -18  | dBm  | 3,4   |  |
| Maximum Received Power   | RX <sub>MAX</sub> | 0    |      |      | dBm  |       |  |
| Centre Wavelength        | λC                | 770  |      | 860  | nm   |       |  |
| LOS De-Assert            | LOSD              |      |      | -26  | dBm  |       |  |
| LOS Assert               | LOSA              | -40  |      |      | dBm  |       |  |
| LOS Hysteresis           |                   | 0.5  |      | 5    | dB   |       |  |

## Notes:

- 1. Class 1 Laser Safety.
- 2. Unfiltered, 20%-80%. Complies with GE and 1x FC eye masks when filtered.
- 3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
- 4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

### **EEPROM Information**

EEPROM memory map specific data field description is as below:

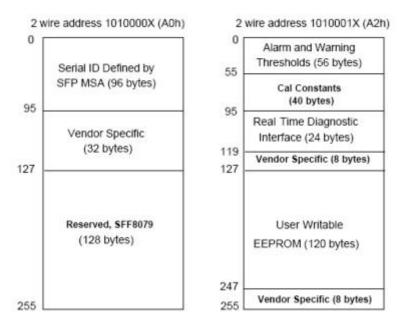

## **Digital Diagnostic Monitoring Interface**

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

| Parameter    | Range             | Accuracy | Calibration |  |
|--------------|-------------------|----------|-------------|--|
| Townsonstrue | 0°C to 70°C (C)   | ±3°C     | Internal    |  |
| Temperature  | -40°C to 85°C (I) | ±3 C     |             |  |
| Voltage      | 2.97V to 3.63V    | ±3%      | Internal    |  |
| Bias Current | 0mA to 100mA      | ±10%     | Internal    |  |
| TX Power     | -9dBm to -4dBm    | ±3dB     | Internal    |  |
| RX Power     | -18dBm to 0dBm    | ±3dB     | Internal    |  |