

# MOSFET

## 650V CoolMOS™ CFD7A SJ Power Device

650V CoolMOS™ CFD7A is Infineon's latest generation of market leading automotive qualified high voltage CoolMOS™ MOSFETs. In addition to the well-known attributes of high quality and reliability required by the automotive industry, the new CoolMOS™ CFD7A series provides for an integrated fast body diode and can be used for PFC and resonant switching topologies like the ZVS phase-shift full-bridge and LLC.

### Features

- Latest 650V automotive qualified technology with integrated fast body diode on the market featuring ultra low  $Q_{rr}$
- Lowest FOM  $R_{DS(on)} \cdot Q_g$  and  $R_{DS(on)} \cdot E_{oss}$
- 100% avalanche tested
- Best-in-class  $R_{DS(on)}$  in SMD and THD packages

### Benefits

- Optimized for higher battery voltages up to 475 V thanks to further improved robustness
- Lower switching losses enabling higher switching frequencies
- High quality and reliability
- Increased efficiency in light load and full load conditions



### Potential applications

- Suitable for PFC and DC-DC stages for:
- Unidirectional and bidirectional DC-DC converters,
  - On-Board battery Chargers

### Product validation

Qualified according to AEC Q101

*Please note: For production part approval process (PPAP) release we propose to share application related information during an early design phase to avoid delays in PPAP release. Please contact Infineon sales office.*

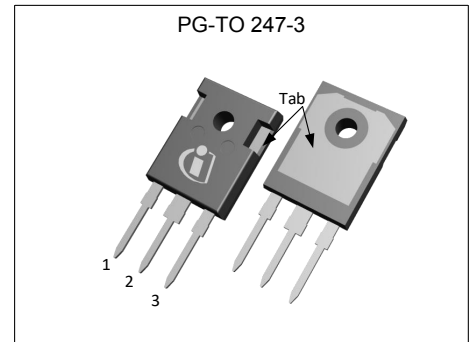

**Table 1 Key Performance Parameters**

| Parameter            | Value | Unit |
|----------------------|-------|------|
| $V_{DS}$             | 650   | V    |
| $R_{DS(on),max}$     | 22    | mΩ   |
| $Q_{g,typ}$          | 234   | nC   |
| $I_{D,pulse}$        | 495   | A    |
| $E_{oss} @ 400V$     | 29.5  | μJ   |
| Body diode $di_F/dt$ | 1300  | A/μs |

| Type / Ordering Code | Package    | Marking  | Related Links  |
|----------------------|------------|----------|----------------|
| IPWS65R022CFD7A      | PG-TO247-3 | 65A022F7 | see Appendix A |

**Table of Contents**

Description ..... 1

Maximum ratings ..... 3

Thermal characteristics ..... 4

Electrical characteristics ..... 5

Electrical characteristics diagrams ..... 7

Test Circuits ..... 11

Package Outlines ..... 12

Appendix A ..... 13

Revision History ..... 14

Trademarks ..... 14

Disclaimer ..... 14

## 1 Maximum ratings

at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

**Table 2 Maximum ratings**

| Parameter                              | Symbol         | Values |      |          | Unit             | Note / Test Condition                                                                           |
|----------------------------------------|----------------|--------|------|----------|------------------|-------------------------------------------------------------------------------------------------|
|                                        |                | Min.   | Typ. | Max.     |                  |                                                                                                 |
| Continuous drain current <sup>1)</sup> | $I_D$          | -      | -    | 96<br>61 | A                | $T_C=25^\circ\text{C}$<br>$T_C=100^\circ\text{C}$                                               |
| Pulsed drain current <sup>2)</sup>     | $I_{D,pulse}$  | -      | -    | 495      | A                | $T_C=25^\circ\text{C}$                                                                          |
| Avalanche energy, single pulse         | $E_{AS}$       | -      | -    | 582      | mJ               | $I_D=8.3\text{A}$ ; $V_{DD}=50\text{V}$ ; see table 10                                          |
| Avalanche current, single pulse        | $I_{AS}$       | -      | -    | 8.3      | A                | -                                                                                               |
| MOSFET dv/dt ruggedness                | dv/dt          | -      | -    | 120      | V/ns             | $V_{DS}=0\dots400\text{V}$                                                                      |
| Gate source voltage (static)           | $V_{GS}$       | -20    | -    | 20       | V                | static;                                                                                         |
| Gate source voltage (dynamic)          | $V_{GS,pulse}$ | -30    | -    | 30       | V                | $f_{repetition} \leq 100\text{kHz}$ , $t_{pulse} \leq 2\text{ns}$                               |
| Power dissipation                      | $P_{tot}$      | -      | -    | 446      | W                | $T_C=25^\circ\text{C}$                                                                          |
| Storage temperature                    | $T_{stg}$      | -55    | -    | 150      | $^\circ\text{C}$ | -                                                                                               |
| Operating junction temperature         | $T_j$          | -40    | -    | 150      | $^\circ\text{C}$ | -                                                                                               |
| Mounting torque                        | -              | -      | -    | 60       | Ncm              | M3 and M3.5 screws                                                                              |
| Continuous diode forward current       | $I_S$          | -      | -    | 96       | A                | $T_C=25^\circ\text{C}$                                                                          |
| Diode pulse current <sup>2)</sup>      | $I_{S,pulse}$  | -      | -    | 495      | A                | $T_C=25^\circ\text{C}$                                                                          |
| Reverse diode dv/dt <sup>3)</sup>      | dv/dt          | -      | -    | 70       | V/ns             | $V_{DS}=0\dots400\text{V}$ , $I_{SD} \leq 58.2\text{A}$ , $T_j=25^\circ\text{C}$<br>see table 8 |
| Maximum diode commutation speed        | di/dt          | -      | -    | 1300     | A/ $\mu\text{s}$ | $V_{DS}=0\dots400\text{V}$ , $I_{SD} \leq 58.2\text{A}$ , $T_j=25^\circ\text{C}$<br>see table 8 |

<sup>1)</sup> Limited by  $T_{j,max}$ .

<sup>2)</sup> Pulse width  $t_p$  limited by  $T_{j,max}$ .

<sup>3)</sup> Identical low side and high side switch with identical  $R_\theta$ .

## 2 Thermal characteristics

**Table 3 Thermal characteristics**

| Parameter                                                  | Symbol     | Values |      |      | Unit | Note / Test Condition               |
|------------------------------------------------------------|------------|--------|------|------|------|-------------------------------------|
|                                                            |            | Min.   | Typ. | Max. |      |                                     |
| Thermal resistance, junction - case                        | $R_{thJC}$ | -      | -    | 0.28 | °C/W | -                                   |
| Soldering temperature, wavesoldering only allowed at leads | $T_{sold}$ | -      | -    | 260  | °C   | 1.6mm (0.063 in.) from case for 10s |

### 3 Electrical characteristics

at  $T_j=25^\circ\text{C}$ , unless otherwise specified

**Table 4 Static characteristics**

For applications with applied blocking voltage > 475 V, it is required that the customer evaluates the impact of cosmic radiation effect in early design phase and contacts the Infineon sales office for the necessary technical support by Infineon.

| Parameter                            | Symbol        | Values |               |            | Unit     | Note / Test Condition                                                                                         |
|--------------------------------------|---------------|--------|---------------|------------|----------|---------------------------------------------------------------------------------------------------------------|
|                                      |               | Min.   | Typ.          | Max.       |          |                                                                                                               |
| Drain-source breakdown voltage       | $V_{(BR)DSS}$ | 650    | -             | -          | V        | $V_{GS}=0V$ , $I_D=1mA$                                                                                       |
| Gate threshold voltage <sup>1)</sup> | $V_{(GS)th}$  | 3.5    | 4             | 4.5        | V        | $V_{DS}=V_{GS}$ , $I_D=2.91mA$                                                                                |
| Zero gate voltage drain current      | $I_{DSS}$     | -      | -             | 1          | $\mu A$  | $V_{DS}=650V$ , $V_{GS}=0V$ , $T_j=25^\circ\text{C}$<br>$V_{DS}=650V$ , $V_{GS}=0V$ , $T_j=150^\circ\text{C}$ |
| Gate-source leakage current          | $I_{GSS}$     | -      | -             | 0.1        | $\mu A$  | $V_{GS}=20V$ , $V_{DS}=0V$                                                                                    |
| Drain-source on-state resistance     | $R_{DS(on)}$  | -      | 0.018<br>0.04 | 0.022<br>- | $\Omega$ | $V_{GS}=10V$ , $I_D=58.2A$ , $T_j=25^\circ\text{C}$<br>$V_{GS}=10V$ , $I_D=58.2A$ , $T_j=150^\circ\text{C}$   |
| Gate resistance                      | $R_G$         | -      | 2.7           | -          | $\Omega$ | $f=250kHz$ , open drain                                                                                       |

**Table 5 Dynamic characteristics**

External parasitic elements (PCB layout) influence switching behavior significantly.

Stray inductances and coupling capacitances must be minimized.

For layout recommendations please use provided application notes or contact Infineon sales office.

| Parameter                                                  | Symbol       | Values |       |      | Unit | Note / Test Condition                                                         |
|------------------------------------------------------------|--------------|--------|-------|------|------|-------------------------------------------------------------------------------|
|                                                            |              | Min.   | Typ.  | Max. |      |                                                                               |
| Input capacitance                                          | $C_{iss}$    | -      | 11659 | -    | pF   | $V_{GS}=0V$ , $V_{DS}=400V$ , $f=250kHz$                                      |
| Output capacitance                                         | $C_{oss}$    | -      | 151   | -    | pF   | $V_{GS}=0V$ , $V_{DS}=400V$ , $f=250kHz$                                      |
| Effective output capacitance, energy related <sup>2)</sup> | $C_{o(er)}$  | -      | 369   | -    | pF   | $V_{GS}=0V$ , $V_{DS}=0...400V$                                               |
| Effective output capacitance, time related <sup>3)</sup>   | $C_{o(tr)}$  | -      | 3899  | -    | pF   | $I_D=\text{constant}$ , $V_{GS}=0V$ , $V_{DS}=0...400V$                       |
| Turn-on delay time                                         | $t_{d(on)}$  | -      | 56    | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=58.2A$ ,<br>$R_G=1.8\Omega$ ; see table 9 |
| Rise time                                                  | $t_r$        | -      | 19    | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=58.2A$ ,<br>$R_G=1.8\Omega$ ; see table 9 |
| Turn-off delay time                                        | $t_{d(off)}$ | -      | 198   | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=58.2A$ ,<br>$R_G=1.8\Omega$ ; see table 9 |
| Fall time                                                  | $t_f$        | -      | 6     | -    | ns   | $V_{DD}=400V$ , $V_{GS}=13V$ , $I_D=58.2A$ ,<br>$R_G=1.8\Omega$ ; see table 9 |

<sup>1)</sup> We do not recommend using the CoolMOS mentioned in this datasheet to operate in "linear mode". For assessment of potential "linear mode", please contact Infineon sales office.

<sup>2)</sup>  $C_{o(er)}$  is a fixed capacitance that gives the same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V

<sup>3)</sup>  $C_{o(tr)}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V

**Table 6 Gate charge characteristics**

| Parameter             | Symbol        | Values |      |      | Unit | Note / Test Condition                             |
|-----------------------|---------------|--------|------|------|------|---------------------------------------------------|
|                       |               | Min.   | Typ. | Max. |      |                                                   |
| Gate to source charge | $Q_{gs}$      | -      | 67   | -    | nC   | $V_{DD}=400V$ , $I_D=58.2A$ , $V_{GS}=0$ to $10V$ |
| Gate to drain charge  | $Q_{gd}$      | -      | 71   | -    | nC   | $V_{DD}=400V$ , $I_D=58.2A$ , $V_{GS}=0$ to $10V$ |
| Gate charge total     | $Q_g$         | -      | 234  | -    | nC   | $V_{DD}=400V$ , $I_D=58.2A$ , $V_{GS}=0$ to $10V$ |
| Gate plateau voltage  | $V_{plateau}$ | -      | 5.7  | -    | V    | $V_{DD}=400V$ , $I_D=58.2A$ , $V_{GS}=0$ to $10V$ |

**Table 7 Reverse diode characteristics**

| Parameter                     | Symbol    | Values |      |      | Unit    | Note / Test Condition                                         |
|-------------------------------|-----------|--------|------|------|---------|---------------------------------------------------------------|
|                               |           | Min.   | Typ. | Max. |         |                                                               |
| Diode forward voltage         | $V_{SD}$  | -      | 1.1  | -    | V       | $V_{GS}=0V$ , $I_F=58.2A$ , $T_J=25^\circ C$                  |
| Reverse recovery time         | $t_{rr}$  | -      | 260  | -    | ns      | $V_R=400V$ , $I_F=58.2A$ , $di_F/dt=100A/\mu s$ ; see table 8 |
| Reverse recovery charge       | $Q_{rr}$  | -      | 2    | -    | $\mu C$ | $V_R=400V$ , $I_F=58.2A$ , $di_F/dt=100A/\mu s$ ; see table 8 |
| Peak reverse recovery current | $I_{rrm}$ | -      | 14.2 | -    | A       | $V_R=400V$ , $I_F=58.2A$ , $di_F/dt=100A/\mu s$ ; see table 8 |

## 4 Electrical characteristics diagrams




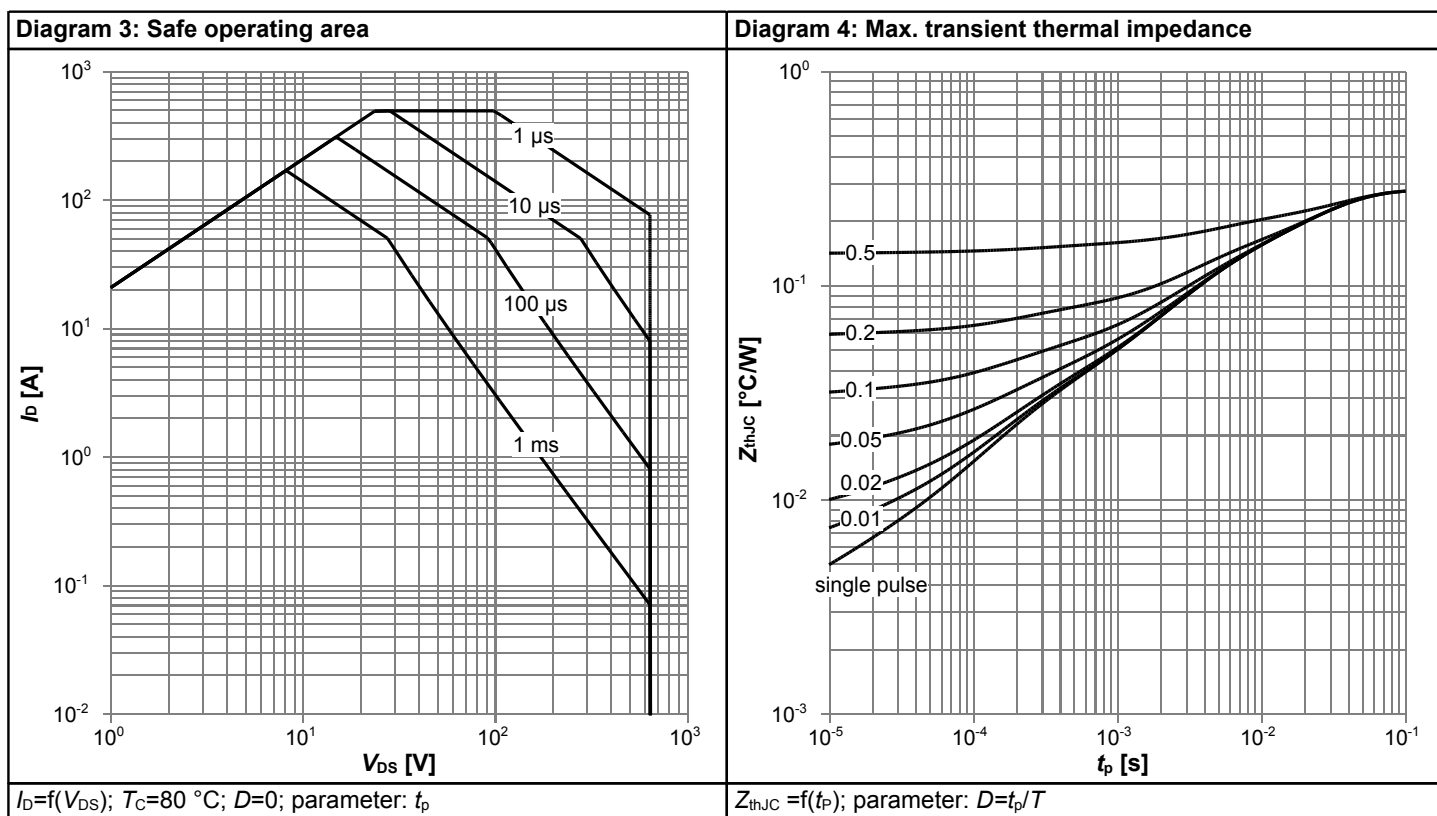


Diagram 5: Typ. output characteristics

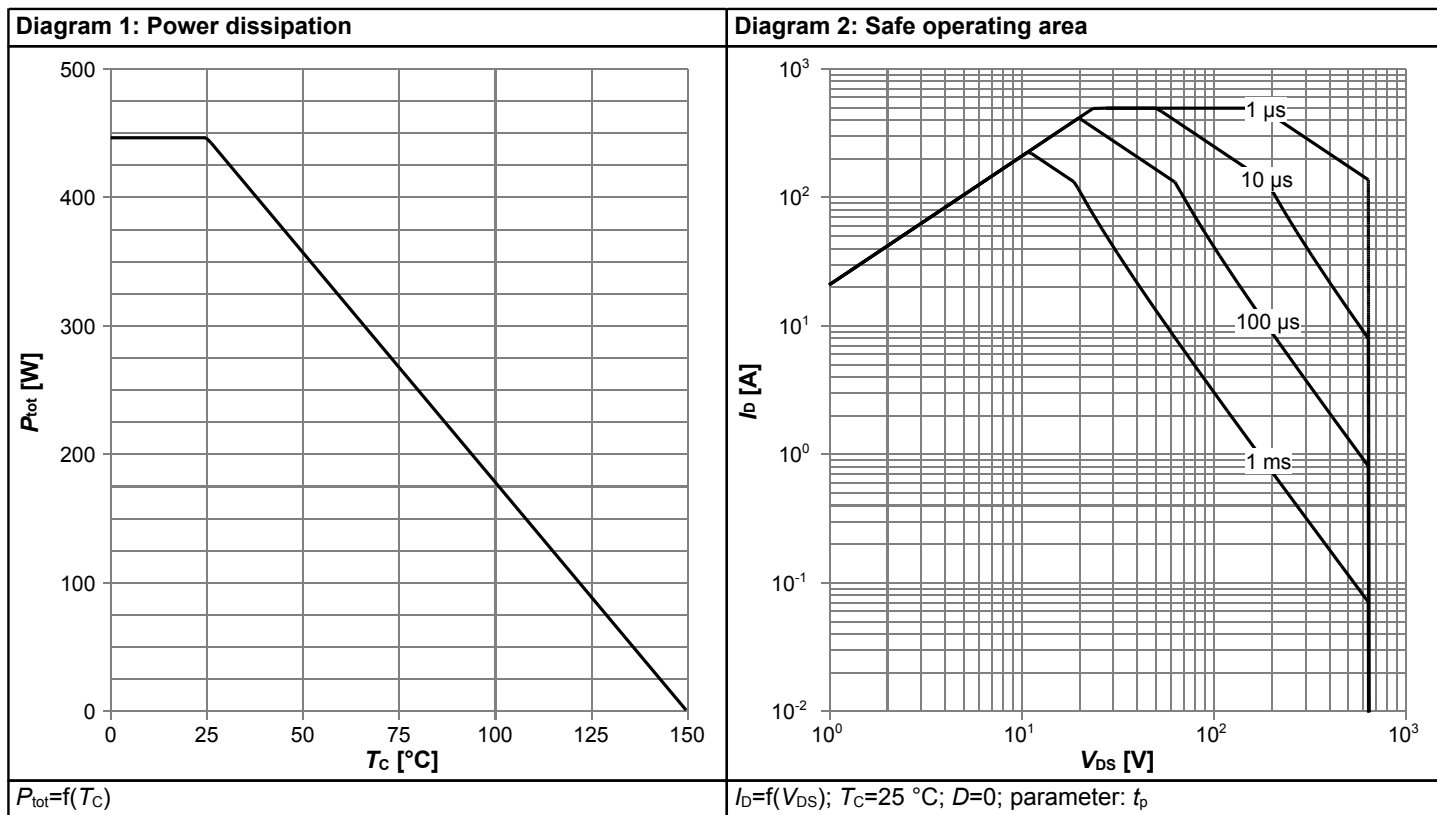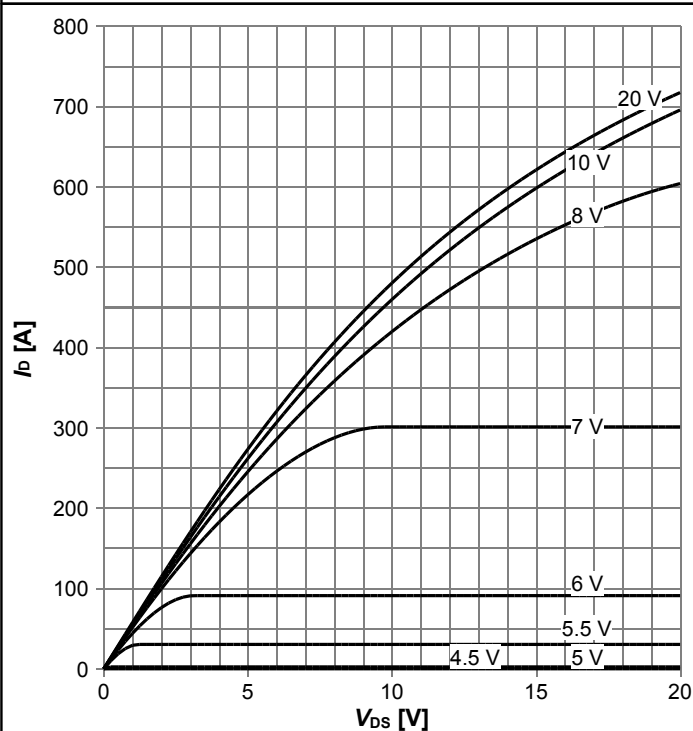


$I_D = f(V_{DS})$ ;  $T_J = 25^\circ\text{C}$ ; parameter:  $V_{GS}$

Diagram 6: Typ. output characteristics

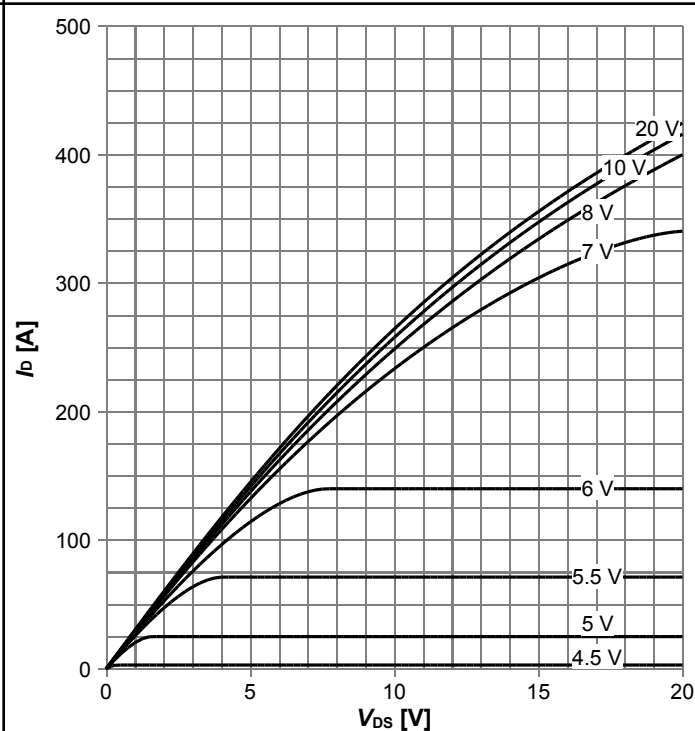


$I_D = f(V_{DS})$ ;  $T_J = 125^\circ\text{C}$ ; parameter:  $V_{GS}$

Diagram 7: Typ. drain-source on-state resistance

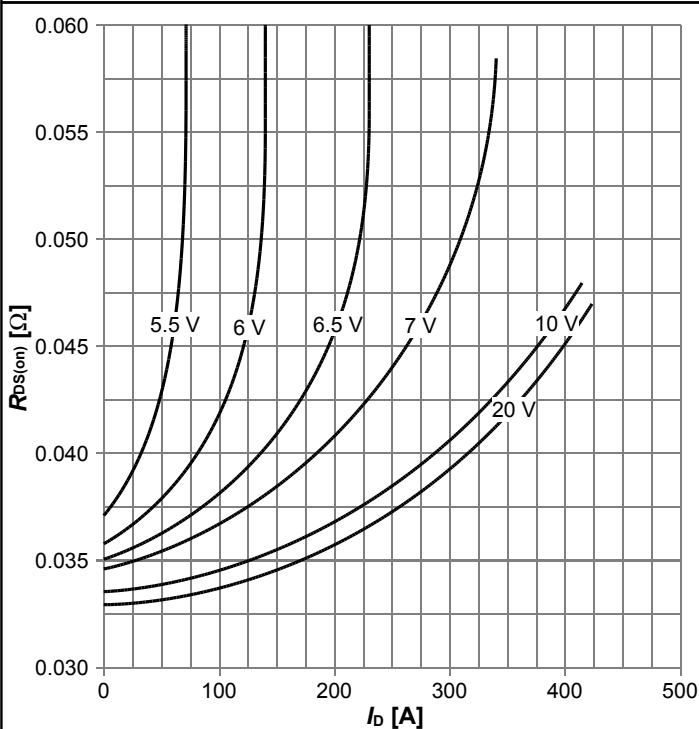


$R_{DS(on)} = f(I_D)$ ;  $T_J = 125^\circ\text{C}$ ; parameter:  $V_{GS}$

Diagram 8: Drain-source on-state resistance

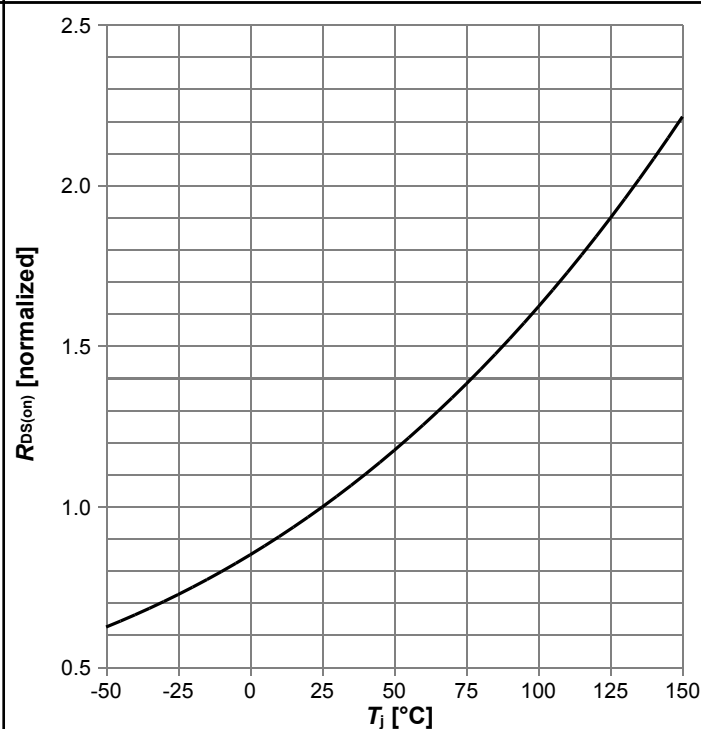


$R_{DS(on)} = f(T_J)$ ;  $I_D = 58.2\text{ A}$ ;  $V_{GS} = 10\text{ V}$

**Diagram 9: Typ. transfer characteristics**

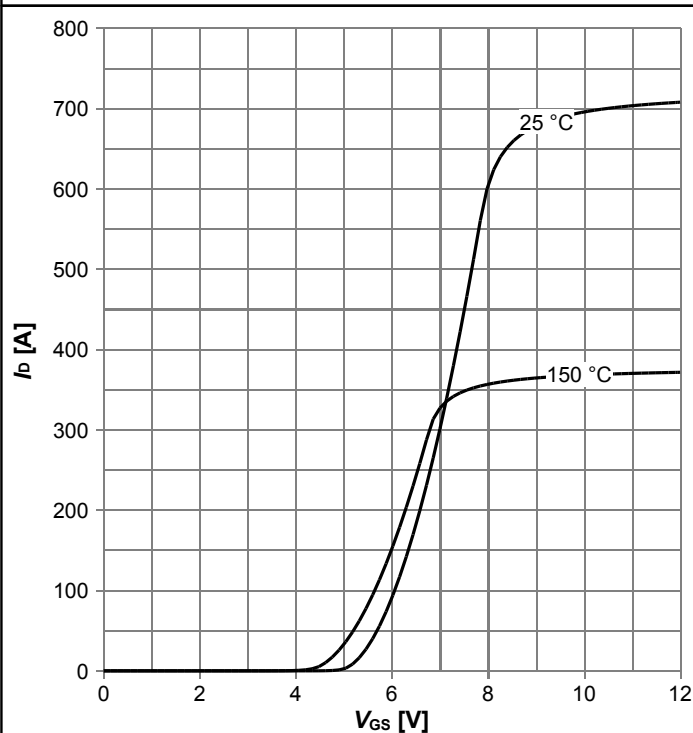


$I_D = f(V_{GS})$ ;  $V_{DS} = 20V$ ; parameter:  $T_j$

**Diagram 10: Typ. gate charge**

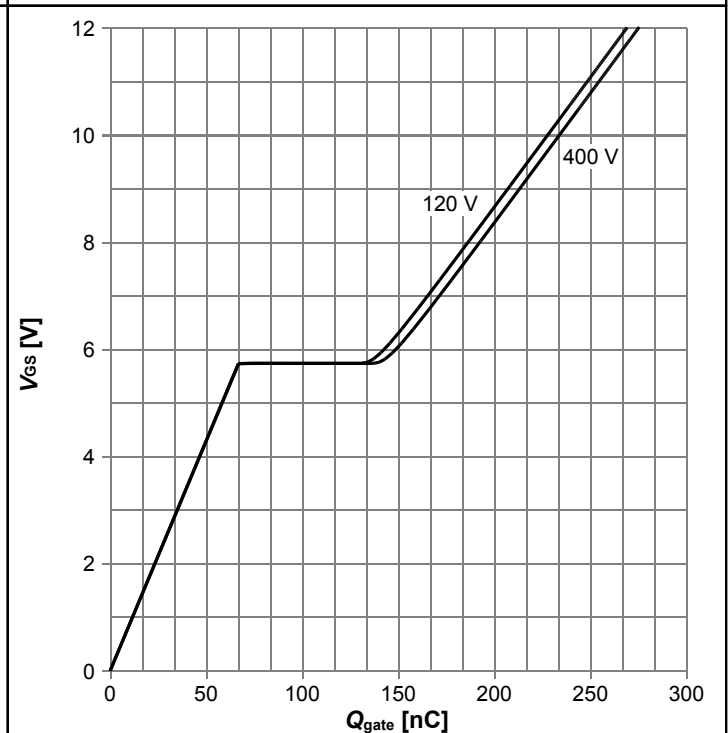


$V_{GS} = f(Q_{gate})$ ;  $I_D = 58.2$  A pulsed; parameter:  $V_{DD}$

**Diagram 11: Forward characteristics of reverse diode**

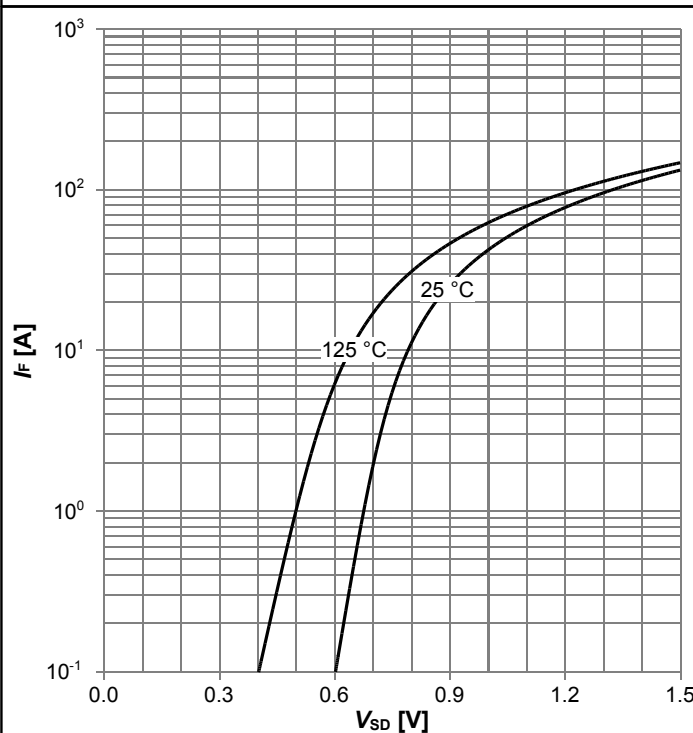


$I_F = f(V_{SD})$ ; parameter:  $T_j$

**Diagram 12: Avalanche energy**

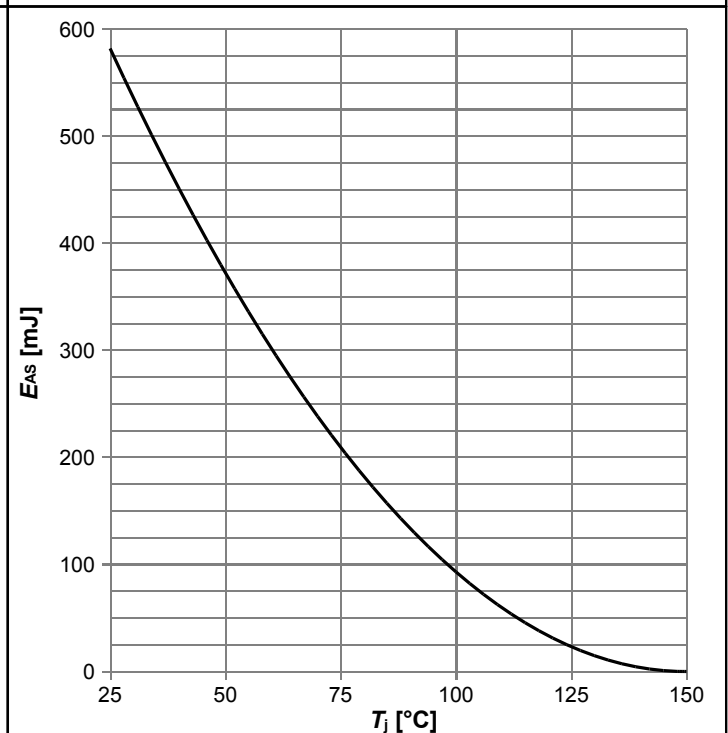


$E_{AS} = f(T_j)$ ;  $I_D = 8.3$  A;  $V_{DD} = 50$  V

Diagram 13: Drain-source breakdown voltage

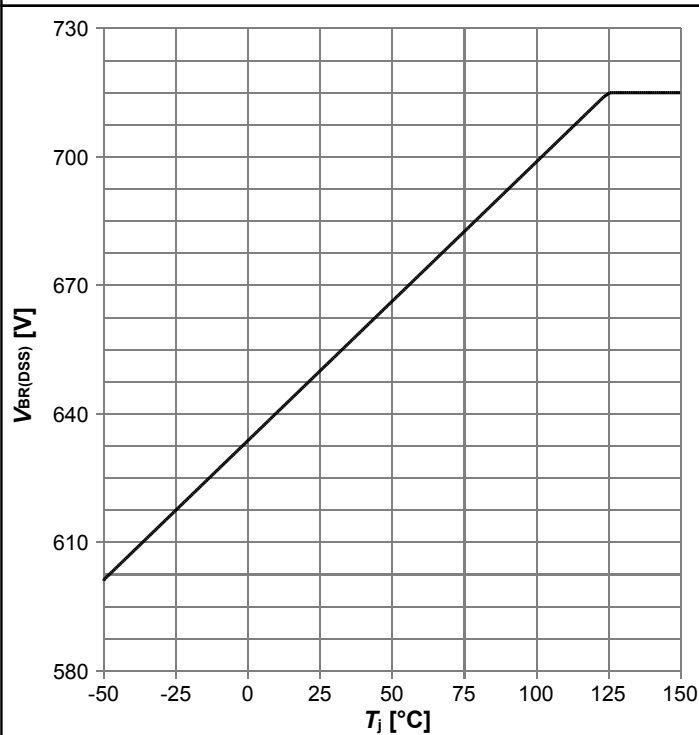


$V_{BR(DSS)} = f(T_j); I_D = 1 \text{ mA}$

Diagram 14: Typ. capacitances

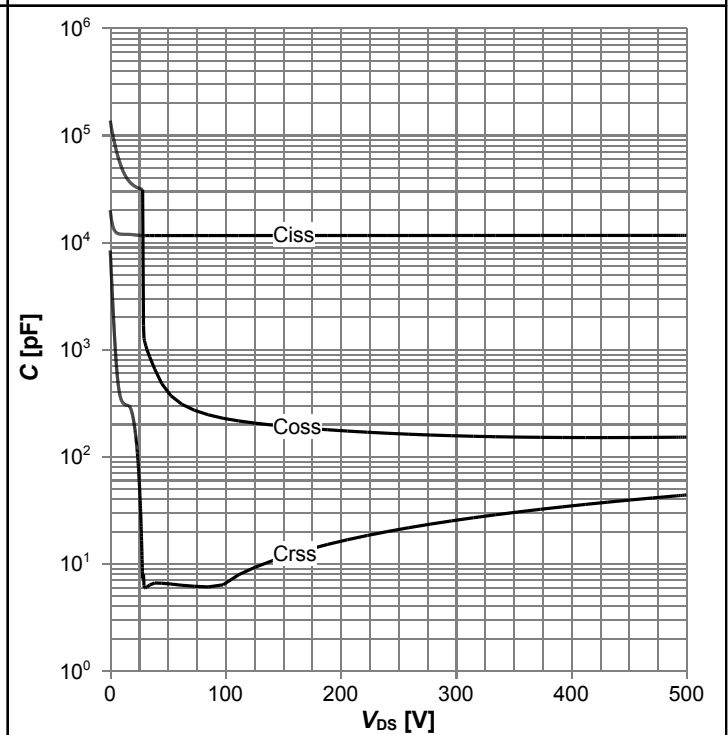

$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 250 \text{ kHz}$

Diagram 15: Typ. Coss stored energy

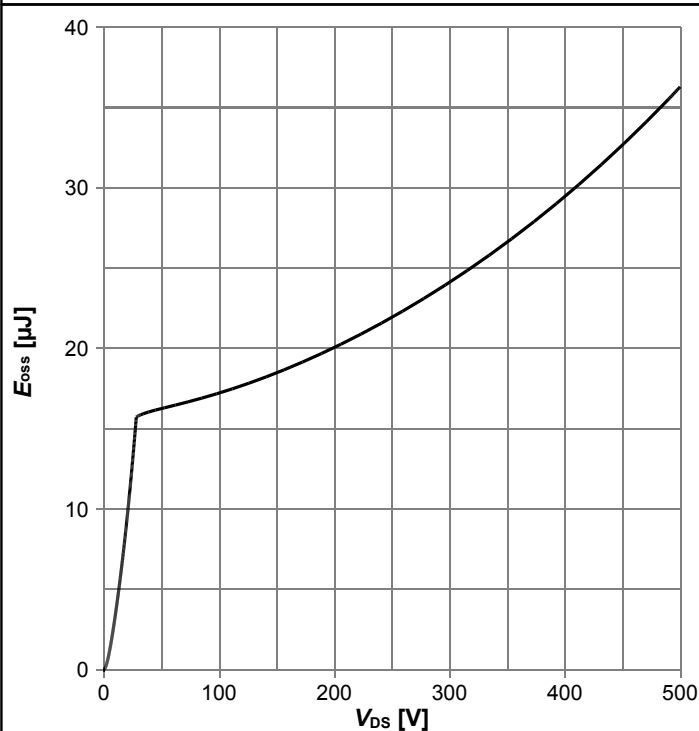



$E_{oss} = f(V_{DS})$

## 5 Test Circuits



**Table 8 Diode characteristics**

| Test circuit for diode characteristics                                                                                | Diode recovery waveform                                                            |
|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  <p><math>R_{g1} = R_{g2}</math></p> |  |


**Table 9 Switching times**
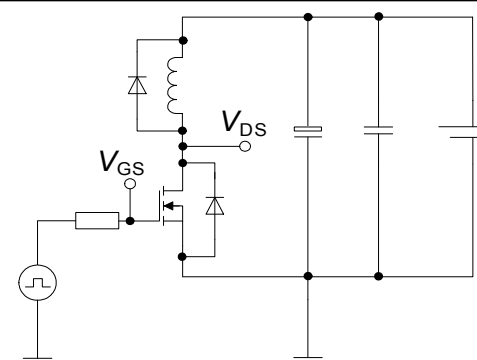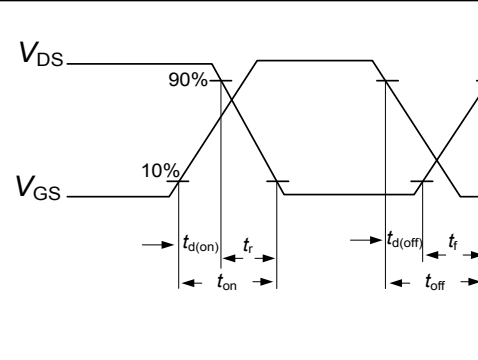
| Switching times test circuit for inductive load                                    | Switching times waveform                                                            |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |

**Table 10 Unclamped inductive load**
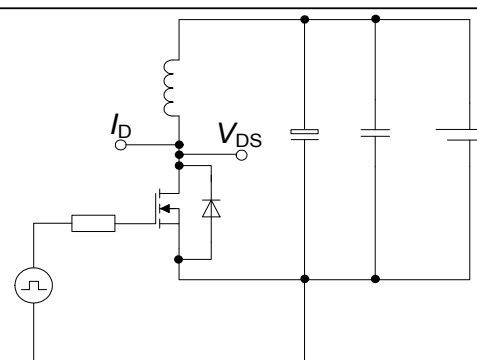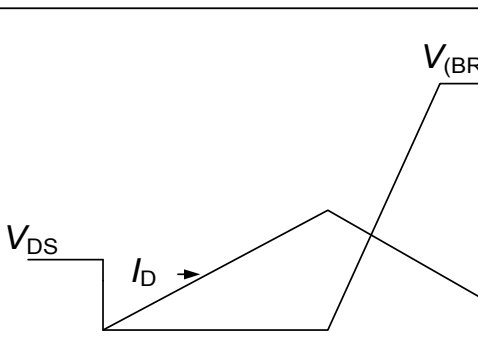
| Unclamped inductive load test circuit                                               | Unclamped inductive waveform                                                         |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

## 6 Package Outlines

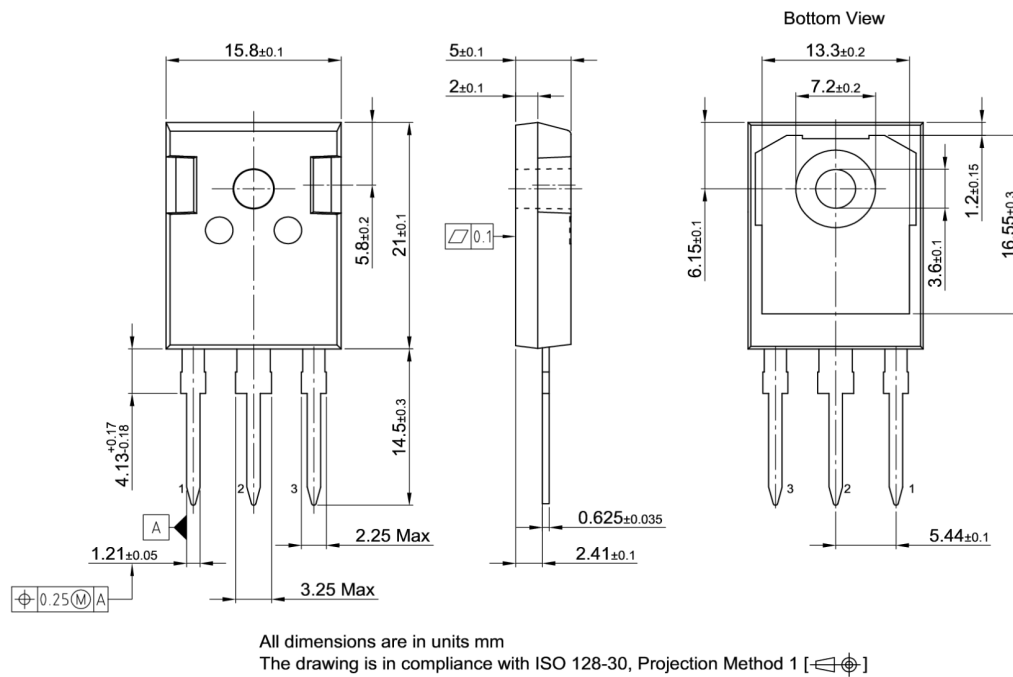

PG-TO247-3-31  
Z8B00198400 Rev. 01

Figure 1 Outline PG-TO247-3, dimensions in mm

## **7 Appendix A**

### **Table 11 Related Links**

- IFX CoolMOS CFD7A Webpage: [www.infineon.com](http://www.infineon.com)
- IFX CoolMOS CFD7A application note: [www.infineon.com](http://www.infineon.com)
- IFX CoolMOS CFD7A simulation model: [www.infineon.com](http://www.infineon.com)
- IFX Design tools: [www.infineon.com](http://www.infineon.com)

## Revision History

IPWS65R022CFD7A

**Revision: 2021-11-18, Rev. 2.1**

Previous Revision

| Revision | Date       | Subjects (major changes since last revision)               |
|----------|------------|------------------------------------------------------------|
| 2.0      | 2021-05-21 | Release of final version                                   |
| 2.1      | 2021-11-18 | Change of wording regarding breakdown voltage / cosmic ray |

### Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

### Disclaimer

#### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

**erratum@infineon.com**

#### Published by

**Infineon Technologies AG**

**81726 München, Germany**

**© 2021 Infineon Technologies AG**

**All Rights Reserved.**

#### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

#### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life.

If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.