


HTK400-C Series

Product Features:

- 400 Watt Single Output Switcher
- Universal AC Input with Active PFC
- Full-Featured Status & Control Signals
- Redundant Operation Capable
- Measures 8.00 x 4.00 x 2.00"
- Multiple Input Connector Options:
 - IEC-320 Inlet (optional Switch)
 - Terminal Block (optional Switch)
- Multiple Output Connector options
 - Quick-Connect / Molex Connections
 - Terminal Block Connections
 - Euro Strip Connections
- 700k hours MTBF per Belcore SR-332
- International Safety Approvals & CE Mark



400 Watt Enclosed with Fan Power Supply
Single Outputs ranging from 3.3~54 VDC



INPUT SPECIFICATIONS:

VOLTAGE	Universal AC Input (90-264 VAC)
FREQUENCY	47-63Hz
INRUSH	<60A @ 230 VAC, 60 Hz, Full Load
CURRENT	6.5A @ 90 VAC Maximum, Full Load
PROTECTION	Single 7A Fuse, Fast blow type
LEAKAGE	<3.5mA
HOLD-UP	20ms @ >85 VAC
EFFICIENCY	80% typical, full load, 230 VAC
HARMONICS	EN61000-3-2 Class D Compliant

OUTPUT SPECIFICATIONS:

MINIMUM LOAD	None
ADJUSTMENT RANGE	Set at factory
LINE REGULATION	<1.0% over entire input range, full load
LOAD REGULATION	<1.0% from no load to maximum load
TEMP REGULATION	<0.02%/°C or 1mV/°C whichever is greater
RIPPLE	<1±% (20MHz)
SETPOINT ACCURACY	1% (maximum)
OVER CURRENT	110-135% (Auto-Recovery)
OVER VOLTAGE PROTECTION	125-135%

STATUS & CONTROL SPECIFICATIONS:

REMOTE SENSE	Compensates for up to 65mV Drop
REMOTE ON/OFF	Low or open circuit to enable output
POWER GOOD	High Signal indicates DC Output is on and within regulation
CURRENT SHARE	Single Wire, ±10% accuracy (optional)
CURRENT MONITOR	0.5V to 3.0V signal changes linearly to represent 0% load to 100% load
STANDBY POWER	5.0V @ 0.3A
FAN FAIL	Power Good Signal will indicate a fan failure

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE	0 ~ +70°C (Derate linearly from 100% load at 50°C to 50% load at 70°C)
STORAGE TEMPERATURE	-20°C ~ +85°C
COOLING	24CFM (from internal ball-bearing fan)
HUMIDITY	5-90% (non-condensing)
VIBRATION	5-50Hz, Acceleration ±7.35M/s ² (3 axes)
SHOCK	20G Peak Acceleration
RELIABILITY	>150,000 Hours (Per Mil HDBK-217), 700,000 Hours (Per Belcore SR-332)

EMISSIONS:

EMISSIONS	EN55022/ CISPR 22 Class B (Conducted)
ELECTROSTATIC DISCHARGE	EN61000-4-2, 8kV, Level 4
RADIATED SUSCEPTIBILITY	EN61000-4-3, Level 3
EFT / BURSTS	EN61000-4-4, ±4kV, Level 4
SURGES	EN61000-4-5, 2kV Earth, 1kV Line-Line, Class 3
CONDUCTED IMMUNITY	EN61000-4-6, 0.15-800MHz, 10V 80%
VOLTAGE DIPS	EN61000-4-10, 95% Dip & 10ms, 30% Dip & 500ms
VOLTAGE INTERRUPTIONS FLUCTUATIONS & FLICKER	EN61000-4-11, 95% reduction, 5ms EN61000-3-3

SAFETY STANDARDS:

CE Mark	Low Voltage Directive, 89/336/EEC
UL/CUL	1950 / 22.2 # 234
TUV	EN60950-1
CB REPORT	IEC60950-1



lhvpower.com

LHV Power Corporation | 10221 Buena Vista | Santee, CA 92071, USA
Tel: 619 258 7700 | Fax: 619 258 7733 | sale@lhvpower.com

HTK400-C Series

400 Watt Enclosed with Fan Power Supply
Single Outputs ranging from 3.3~54 VDC


PART #	INPUT	V1 / A1	NOTE
HTK400-3.3Cyz	100-240	3.3V 80A	96A peak (3ms)
HTK400-05Cyz	100-240	5V 80A	96A peak (3ms)
HTK400-09Cyz	100-240	9V 44A	53A peak (3ms)
HTK400-12Cyz	100-240	12V 33A	40A peak (3ms)
HTK400-15Cyz	100-240	15V 26.6A	32A peak (3ms)
HTK400-18Cyz	100-240	18V 22A	26.4A peak (3ms)
HTK400-24Cyz	100-240	24V 16.6A	20A peak (3ms)
HTK400-28Cyz	100-240	28V 14A	18.8A peak (3ms)
HTK400-30Cyz	100-240	30V 13A	15.6A peak (3ms)
HTK400-36Cyz	100-240	36V 11A	13.2A peak (3ms)
HTK400-48Cyz	100-240	48V 8.2A	9.8A peak (3ms)
HTK400-54Cyz	100-240	54V 7.4A	8.8A peak (3ms)

Define Front Panel Type, Replace "y" with

0 = without panel 1 = IEC inlet only
3 = power switch + IEC inlet 4 = power switch and terminal

Define Output Connector Type, Replace "z" with:

1 = Terminal Block
2 = Terminal Strip
3 = Mates with Molex 09-91-1200 (14 pins)

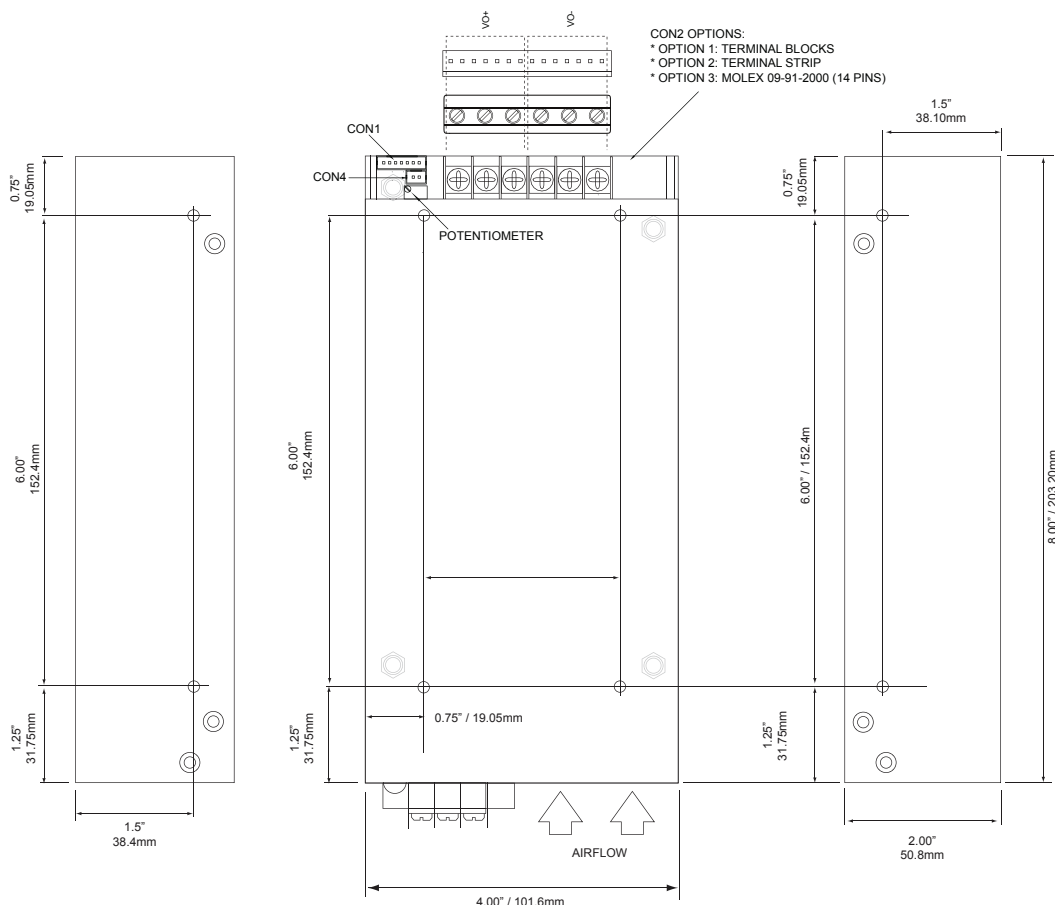





CON2 OPTIONS:
• OPTION 1: TERMINAL BLOCKS
• OPTION 2: TERMINAL STRIP
• OPTION 3: MOLEX 09-91-2000 (14 PINS)

Connector 1:
Mates with JST P/N :B7B-PH-K

Pin#	Description
1	Inhibit
2	Remote Sense +
3	Power Good +
4	Current Monitor
5	Current Share
6	5VSB
7	RS -

Connector 4:
Mates with JST B2B-PH-K

Pin #	Description
1	+Aux Fan
2	Return

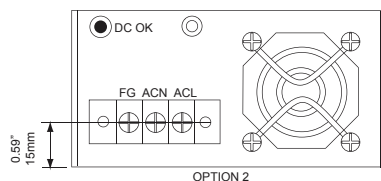

lhvpower.com

LHV Power Corporation | 10221 Buena Vista | Santee, CA 92071, USA
Tel: 619 258 7700 | Fax: 619 258 7733 | sale@lhvpower.com