



OptiMOS™ -T2 Power-Transistor

Product Summary

V_{DS}	100	V
$R_{DS(on),max}^{3)}$	61	mΩ
I_D	16	A

Features

- Dual N-channel Normal Level - Enhancement mode
- AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- RoHS compliant
- 100% Avalanche tested

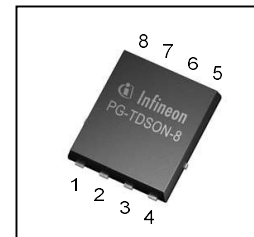PG-TDSON-8-4


Type	Package	Marking
IPG16N10S4-61	PG-TDSON-8-	4N1061

Maximum ratings, at $T_J=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current one channel active	I_D	$T_C=25\text{ °C}$, $V_{GS}=10\text{ V}$	16	A
		$T_C=100\text{ °C}$, $V_{GS}=10\text{ V}^{1)}$	11	
Pulsed drain current ¹⁾ one channel active	$I_{D,pulse}$	-	64	
Avalanche energy, single pulse ^{1, 3)}	E_{AS}	$I_D=8\text{ A}$	33	mJ
Avalanche current, single pulse ³⁾	I_{AS}	-	10	A
Gate source voltage	V_{GS}	-	±20	V
Power dissipation one channel active	P_{tot}	$T_C=25\text{ °C}$	29	W
Operating and storage temperature	T_J, T_{stg}	-	-55 ... +175	°C

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics¹⁾

Thermal resistance, junction - case	R_{thJC}	-	-	-	5.2	K/W
SMD version, device on PCB	R_{thJA}	minimal footprint	-	100	-	
		6 cm ² cooling area ²⁾	-	60	-	

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified
Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=1mA$	100	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=9\mu A$	2.0	2.8	3.5	
Zero gate voltage drain current ³⁾	I_{DSS}	$V_{DS}=100V, V_{GS}=0V, T_j=25\text{ °C}$	-	0.01	1	μA
		$V_{DS}=100V, V_{GS}=0V, T_j=125\text{ °C}^{2)}$	-	1	100	
Gate-source leakage current ³⁾	I_{GSS}	$V_{GS}=20V, V_{DS}=0V$	-	-	100	nA
Drain-source on-state resistance ³⁾	$R_{DS(on)}$	$V_{GS}=10V, I_D=16A$	-	53	61	m Ω

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics¹⁾

Input capacitance ³⁾	C_{iss}	$V_{GS}=0V, V_{DS}=25V,$ $f=1MHz$	-	374	580	pF
Output capacitance ³⁾	C_{oss}		-	120	240	
Reverse transfer capacitance ³⁾	C_{rss}		-	10	20	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=50V, V_{GS}=10V,$ $I_D=16A, R_G=11\Omega$	-	3	-	ns
Rise time	t_r		-	1	-	
Turn-off delay time	$t_{d(off)}$		-	5	-	
Fall time	t_f		-	5	-	

Gate Charge Characteristics^{1, 3)}

Gate to source charge	Q_{gs}	$V_{DD}=50V, I_D=16A,$ $V_{GS}=0 \text{ to } 10V$	-	2.0	3.0	nC
Gate to drain charge	Q_{gd}		-	1.3	2.6	
Gate charge total	Q_g		-	5.4	9.5	
Gate plateau voltage	$V_{plateau}$		-	5.4	-	V

Reverse Diode


Diode continuous forward current ¹⁾ one channel active	I_S	$T_C=25^\circ C$	-	-	16	A
Diode pulse current ¹⁾ one channel active	$I_{S,pulse}$		-	-	64	
Diode forward voltage	V_{SD}	$V_{GS}=0V, I_F=16A,$ $T_j=25^\circ C$	-	1.0	1.3	V
Reverse recovery time ¹⁾	t_{rr}	$V_R=50V, I_F=I_S,$ $di_F/dt=100A/\mu s$	-	50	-	ns
Reverse recovery charge ^{1, 3)}	Q_{rr}		-	70	-	nC

¹⁾ Specified by design. Not subject to production test.


²⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.

³⁾ Per channel


1 Power dissipation

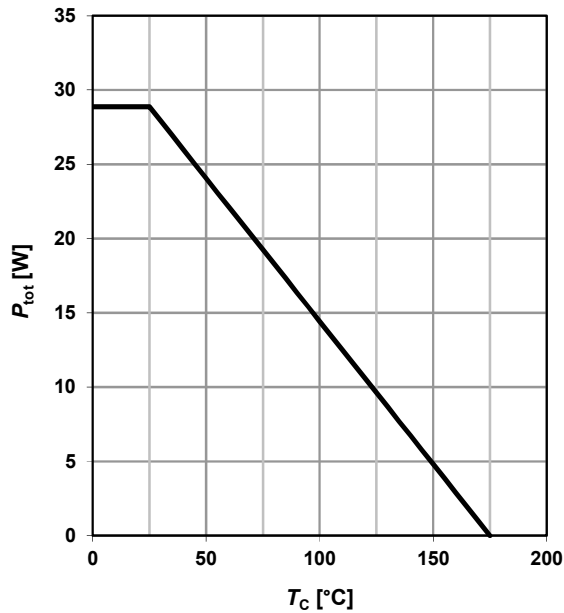 $P_{\text{tot}} = f(T_C); V_{\text{GS}} \geq 6 \text{ V}; \text{ one channel active}$


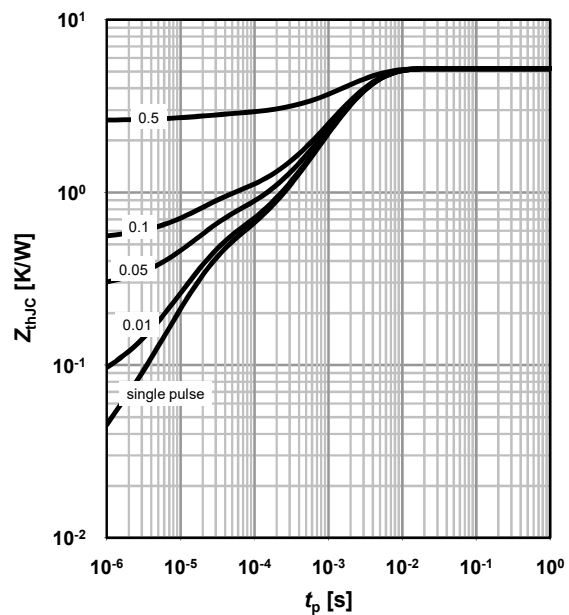
2 Drain current

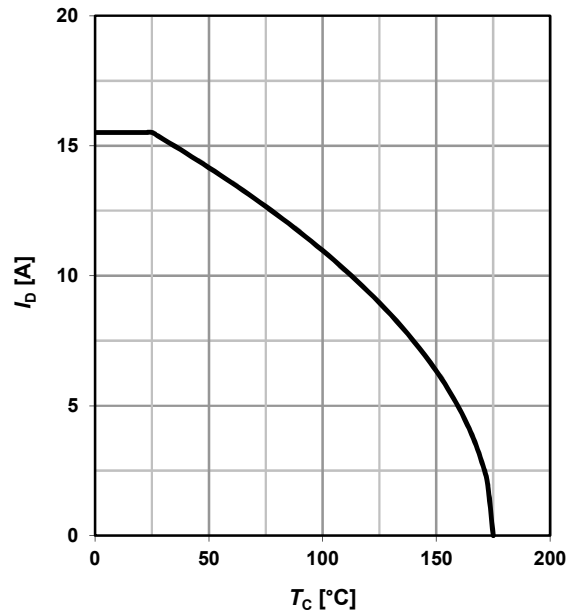 $I_D = f(T_C); V_{\text{GS}} \geq 6 \text{ V}; \text{ one channel active}$


3 Safe operating area

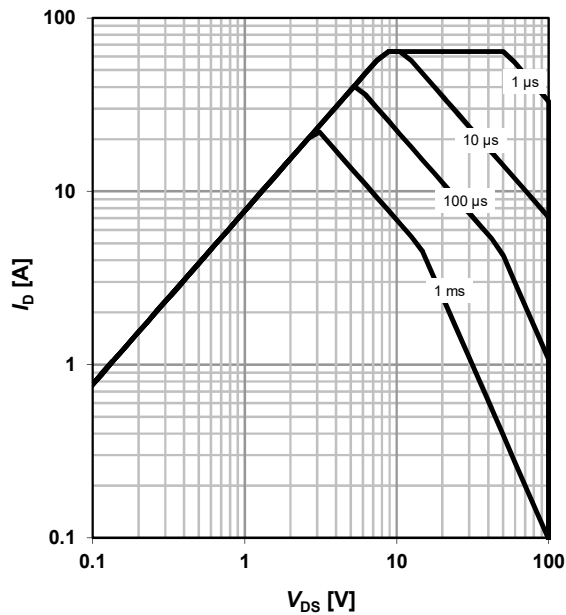
 $I_D = f(V_{\text{DS}}); T_C = 25^\circ\text{C}; D = 0; \text{ one channel active}$
parameter: t_p


4 Max. transient thermal impedance

 $Z_{\text{thJC}} = f(t_p)$
parameter: $D = t_p / T$


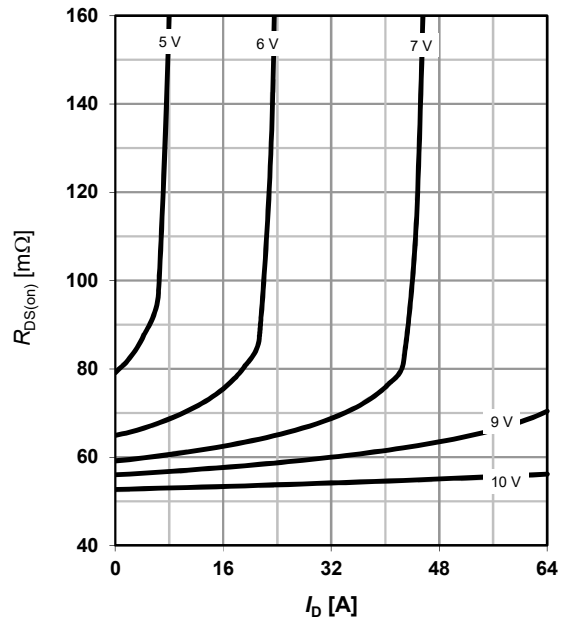
5 Typ. output characteristics³⁾

 $I_D = f(V_{DS}); T_J = 25^\circ\text{C}$

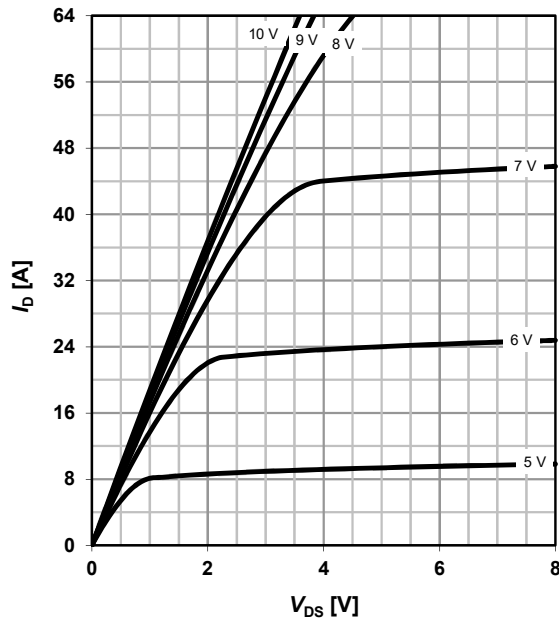parameter: V_{GS}


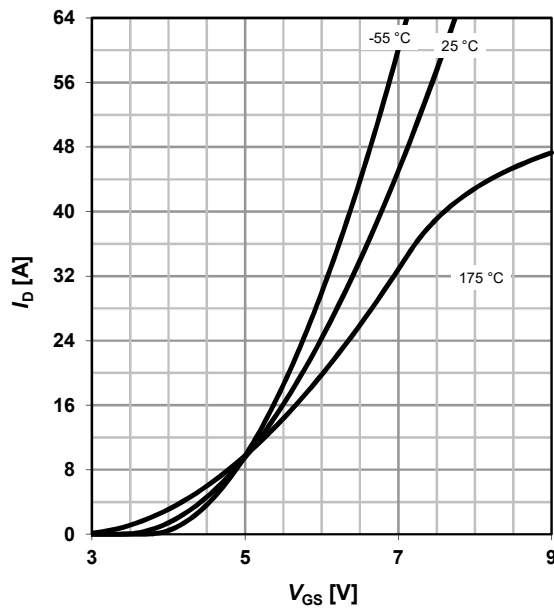
6 Typ. drain-source on-state resistance³⁾

 $R_{DS(on)} = f(I_D); T_J = 25^\circ\text{C}$


parameter: V_{GS}


7 Typ. transfer characteristics³⁾

 $I_D = f(V_{GS}); V_{DS} = 6\text{ V}$

parameter: T_J


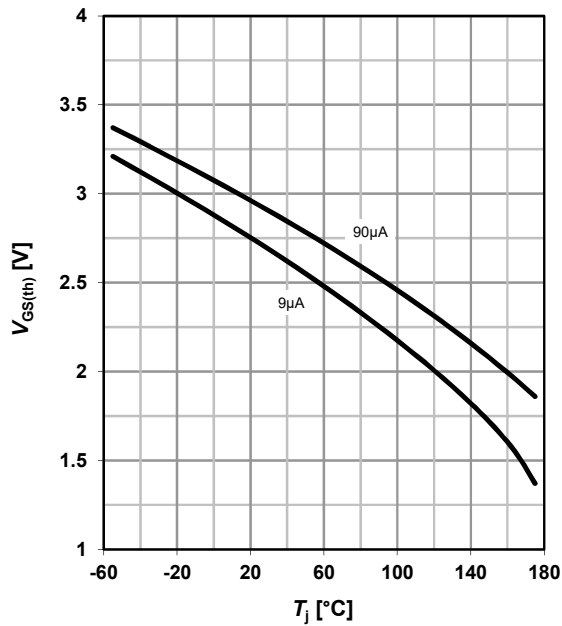
8 Typ. drain-source on-state resistance³⁾

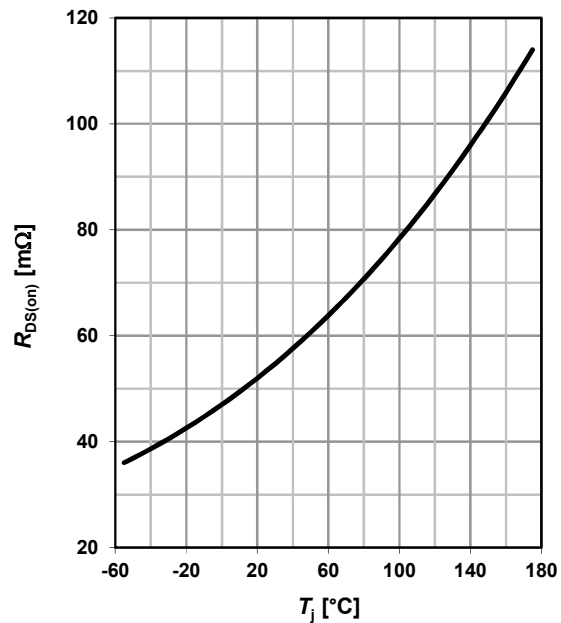 $R_{DS(on)} = f(T_J); I_D = 16\text{ A}; V_{GS} = 10\text{ V}$
 $\alpha = 0.4$


9 Typ. gate threshold voltage


$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$

parameter: I_D



10 Typ. Capacitances³⁾


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

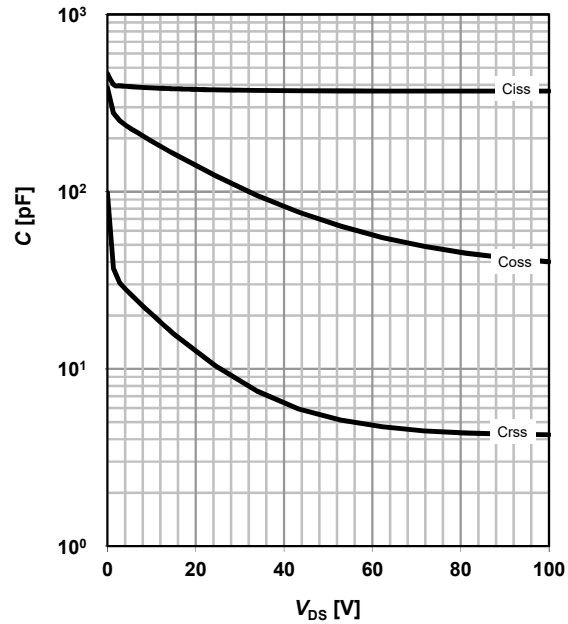

11 Typical forward diode characteristics³⁾

$$I_F = f(V_{SD})$$


parameter: T_j

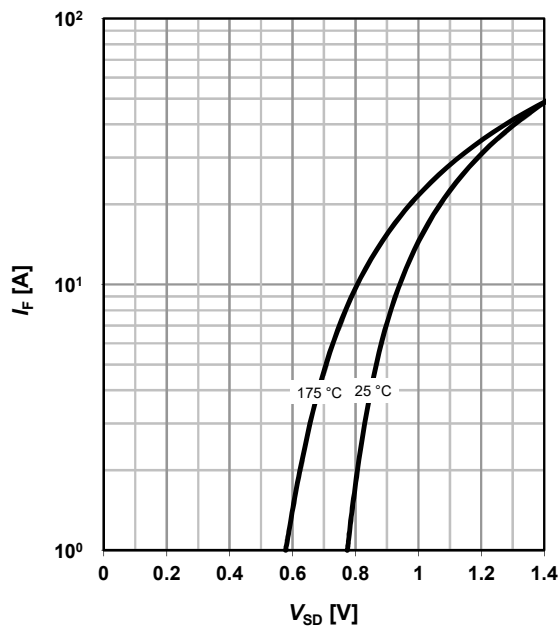

12 Avalanche characteristics³⁾


$$I_{AS} = f(t_{AV})$$

parameter: $T_{j(start)}$

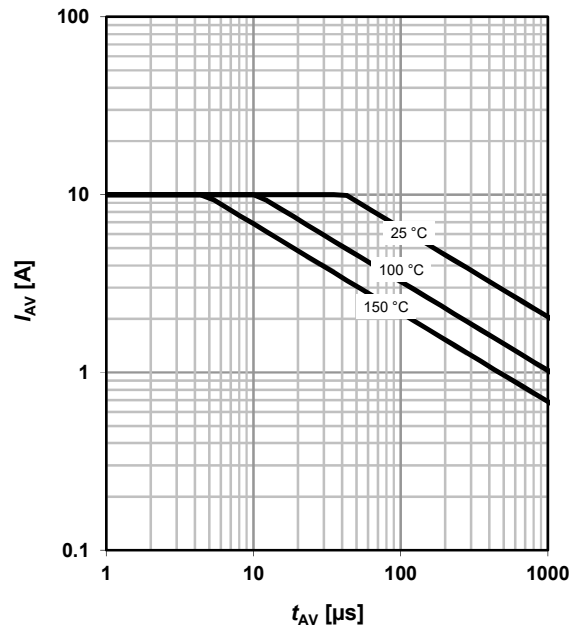


13 Avalanche energy³⁾

$$E_{AS} = f(T_j), I_D = 8A$$

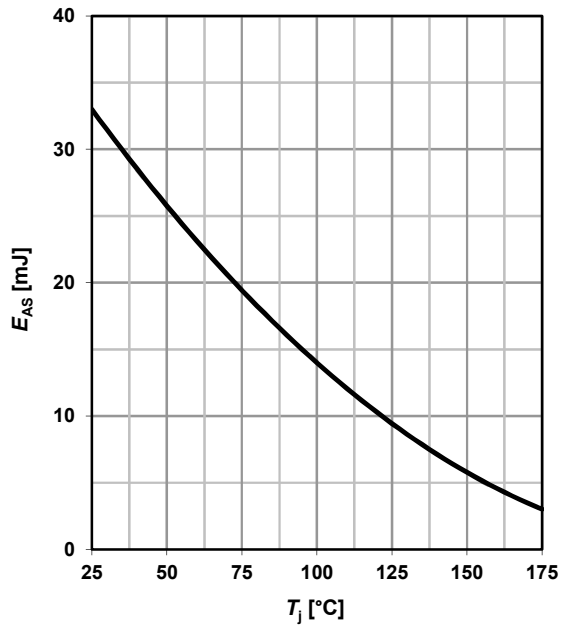

14 Drain-source breakdown voltage


$$V_{BR(DSS)} = f(T_j); I_D = 1 mA$$

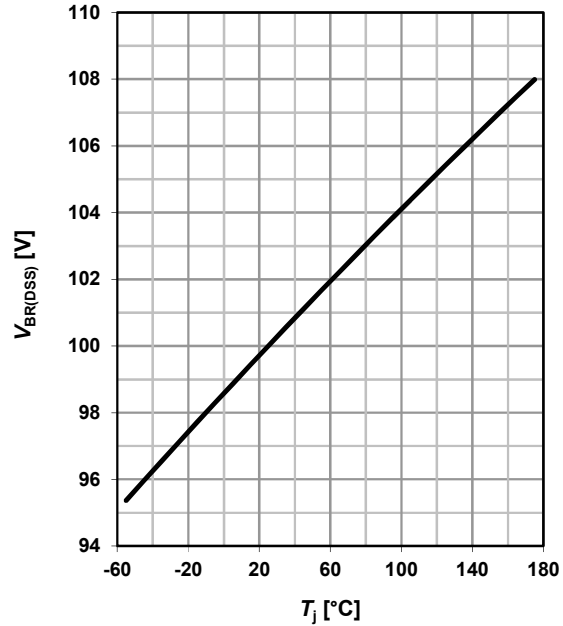


15 Typ. gate charge³⁾

$$V_{GS} = f(Q_{gate}); I_D = 16 A \text{ pulsed}$$

parameter: V_{DD}

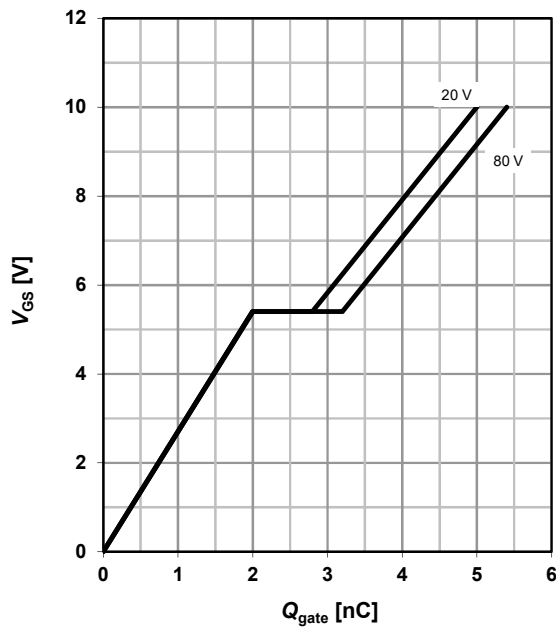

16 Gate charge waveforms

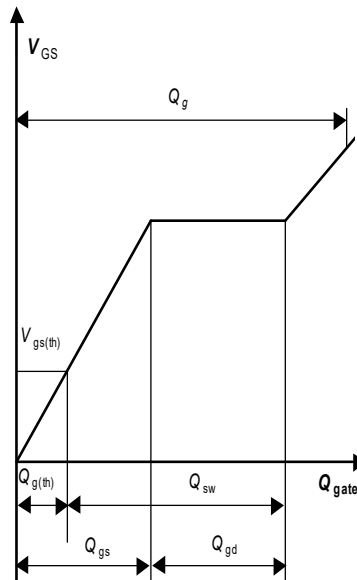

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2022-08-24**Published by****Infineon Technologies AG****81726 Munich, Germany****© 2022 Infineon Technologies AG****All Rights Reserved.****Do you have any questions about
any aspect of this document?****Email: erratum@infineon.com****Document reference****IPG16N10S4-61-Data-Sheet-11-
Infineon****IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications. The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact the nearest Infineon Technologies Office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Revision History

Version	Date	Changes
Revision 1.0	29.11.2011	Final Data Sheet
Revision 1.1	2014-07-21	Update of Coss, Ciss, Qgs, Qtot
Revision 1.2	2022-08-24	Diagram 8 Typ. drain-source on-state resistance: used α value clarified