



# JN Semiconductor®

To k are more about Olf Semiconductor, please visit our website at www.onsemi.com

Please note. As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees



*IGBT* 

# FGAF40N60UFD

### **Ultrafast IGBT**

### **General Description**

Fairchild's UFD series of Insulated Gate Bipolar Transistors (IGBTs) provides low conduction and switching losses. The UFD series is designed for applications such as motor control and general inverters where high speed switching is a required feature.

### **Features**

- · High speed switching
- Low saturation voltage : V<sub>CE(sat)</sub> ... √ € = 20A
- · High input impedance
- CO-PAK, IGBT with FRP (r = 50ns /p.)

### **Applications**

AC & DC motor controls, general purpose inverters, robotics, and sometimes



TC PF



C -

## Absolute Max num Ra. 35 $^{\text{T}}_{\text{C}}$ = 25°C unless othe wise noted

Symbol	Description	FGAF40N60UFD	Units
V <sub>CES</sub>	C-"cto,er Vol'(ige	600	V
V <sub>GES</sub>	Gate mitter Vol.ago	± 20	V
	Cor Stor Current @ T <sub>C</sub> = 25°C	40	Α
ıC	Collector Current ② T <sub>C</sub> = 100°C	20	Α
I <sub>CM</sub> (	Pulsed Collector Current	160	Α
1 <sub>E</sub>	L'iode Continuous Forward Current @ T <sub>C</sub> = 100°C	15	Α
Ivi	Diode Maximum Forward Cument	160	Α
P <sub>D</sub>	Maxin am Power Dissipation @ T <sub>C</sub> = 25°C	100	W
	Maximum Power Dissipation @ T <sub>C</sub> = 100°C	40	W
T	Operating Junction Temperature	-55 to +150	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +150	°C
T <sub>L</sub>	Max mum Lead Temp. for Soldering Purposes, 1/8" from Case for 5 Seconds	300	°C

### Notes

(1) Repetitive rating: Pulse width limited by max. junction temperature


### **Thermal Characteristics**

Symbol	Parameter	Тур.	Max.	Units
$R_{\theta JC}(IGBT)$	Thermal Resistance, Junction-to-Case		1.2	°C/W
$R_{\theta JC}(DIODE)$	Thermal Resistance, Junction-to-Case		2.6	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient		40	°C/W

©2004 Fairchild Semiconductor Corporation

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Cha	racteristics					
BV <sub>CES</sub>	Collector-Emitter Breakdown Voltage	$V_{GE} = 0V, I_{C} = 250uA$	600			V
ΔB <sub>VCES</sub> / ΔΤ <sub>J</sub>	Temperature Coefficient of Breakdown Voltage	V <sub>GE</sub> = 0V, I <sub>C</sub> = 1mA		0.6		V/°C
I <sub>CES</sub>	Collector Cut-Off Current	$V_{CE} = V_{CES}, V_{GE} = 0V$			250	uA
I <sub>GES</sub>	G-E Leakage Current	$V_{GE} = V_{GES}, V_{CE} = 0V$			± 100	nA
On Chai	racteristics					
V <sub>GE(th)</sub>	G-E Threshold Voltage	$I_C$ = 20mA, $V_{CE}$ = $V_{GE}$	3.5	5.1	5.5	V
	Collector to Emitter	$I_C = 20A$ , $V_{GE} = 15V$		21		V
$V_{CE(sat)}$	Saturation Voltage	$I_C = 40A$ , $V_{GE} = 15V$		3.		V
		<u> </u>				•
	c Characteristics					
C <sub>ies</sub>	Input Capacitance	$V_{CE} = 30V_{V_{GE}} = 0V_{V_{CE}}$		107	\	p.F
C <sub>oes</sub>	Output Capacitance	f = 1MHz		10		pF
C <sub>res</sub>	Reverse Transfer Capacitance	1 = 1111112		50		pF
Switchin				1 N		
OWILCIIII	ng Characteristics					
	ng Characteristics  Turn-On Delay Time		2.0	15		113
t <sub>d(on)</sub>			<u> </u>	15		113
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>CC</sub> 300 V, = 20A,	<u> </u>	_	-  130	
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub>	Turn-On Delay Time Rise Time	V <sub>CC</sub> 300 V, = 20A, R <sub>G</sub> = 2, V <sub>GE</sub> = 15V,	<u> </u>	3(1)	-  (30 100	
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub>	Turn-On Delay Time Rise Time Turn-Off Delay Time	V <sub>CC</sub> 300 V, = 20A, R <sub>G</sub> = 2, V <sub>GE</sub> = 15V, Inductive Load, T <sub>C</sub> = 25°C		30		ns ns
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub> t <sub>f</sub> E <sub>on</sub>	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time	$R_G = \Omega$ , $V_{GF} = 15V$ ,	0	3 65 35	100	ns ns
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub> t <sub>f</sub> E <sub>on</sub>	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss	$R_G = \Omega$ , $V_{GF} = 15V$ ,		3() 65 35 170	100	ns ns uJ
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d</sub> t <sub>d(off)</sub> t <sub>f</sub> E <sub>on</sub> E <sub>off</sub> E <sub>ts</sub>	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo	$R_G = \Omega$ , $V_{GF} = 15V$ ,		30 65 35 470 150	100  	ns ns ns uJ uJ
$t_{d(on)}$ $t_{r}$ $t_{t}$ $t_{d(off)}$ $t_{f}$ $t_{on}$ $t_{off}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$ $t_{t}$	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo	$R_G = \Omega$ , $V_{GF} = 15V$ ,		30 65 35 150 600	100   1000	ns ns ns uJ uJ
td(on)  tr  tr  td(off)  tf  Eon  Eoff  Ets  td(on)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 25^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 20A$ ,	Z O	30 600 30	100   1000	ns ns uJ uJ uJ ns
td(on)  tr  td(off)  tf  Eon  Eoff  Ets  td(on)  tr  td(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-O Delay Time	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 25^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 200$ , $R_G = 100$ , $V_{GC} = 15V$	7/-	3(1) 53 35 4(1) 130 600 30 37	100   1000 	ns ns ns uJ uJ uJ ns
td(on)  tr  td(off)  tf  Eon  Ets  td(off)  tt  tf  Ets  td(on)  tr  td(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-O Delay Time Time Turn On S. y Loss	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 25^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 20A$ ,		31 53 35 170 130 600 30 37 110	100  1000   200	ns ns uJ uJ uJ ns ns
td(on)  tr  td(off)  tf  Eon  Ets  td(off)  tt  tf  Ets  td(on)  tr  td(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-O Delay Time Time Turn-On S. y Loss Jun-C Switching Loss	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 25^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 200$ , $R_G = 100$ , $V_{GC} = 15V$	  	31 53 35 47 130 600 30 37 110 80	100  1000   200	ns ns uJ uJ ns ns
td(on) ttr td(off) ttf Eon Ets td(on) ttr td(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-O Delay Time Time Turn-On S. y Loss Lin-C Switching Loss Tital Control of Se	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 25^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 200$ , $R_G = 100$ , $V_{GC} = 15V$	  	3 5 35 470 150 600 30 37 110 80 500	1000  1000   200 250	ns ns uJ uJ ns ns ns us
td(on) ttr td(off) ttf Eon Ets td(on) ttr td(off)	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-On Delay Time Tim Turn-On S. g Loss Jim-On S. g Loss Jim-On Switching Loss Tital Control Loss Tital Control Loss Total Gate Charge	$\begin{aligned} R_G &= \Omega, V_{GE} = 15V, \\ &\text{Inductive Load}, \ T_C = 25^{\circ}\text{C} \end{aligned}$ $\begin{aligned} V_{CC} &= 300 \text{ V}, \ I_C = 20\text{A}, \\ R_G &= 10\Omega, \ V_{GC} = 15\text{V} \end{aligned}$ Inductive Load, $T_C = 125^{\circ}\text{C}$	   	30 35 477 130 600 30 37 110 80 500 310	1000  1000   200 250 	ns ns uJ uJ ns ns ns us
td(on) tr tr td(off) tf Eon Eoff Ets td(on) tr td(off) tc	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-On Delay Time Tim Turn-On S. g Loss Jim-On S. g Loss Ji	$R_G = \Omega$ , $V_{GE} = 15V$ , Inductive Load, $T_C = 23^{\circ}C$ $V_{CC} = 300 \text{ V}$ , $I_C = 20\text{ A}$ , $R_G = 10\Omega$ , $V_{GC} = 15\text{ V}$ Inductive Load, $T_C = 125^{\circ}C$ $V_{CE} = 300 \text{ V}$ , $I_C = 20\text{ A}$ ,	   	3 5 35 10 130 600 30 37 110 80 500 310 810	1000  1000  200 250  1200	ns ns uJ uJ ns ns ns us uJ
t <sub>d(on)</sub> t <sub>r</sub> t <sub>d(off)</sub>	Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Lo Total Switching Lo Turn-On Delay Tin Rise Tim Turn-On Delay Time Tim Turn-On S. g Loss Jim-On S. g Loss Jim-On Switching Loss Tital Control Loss Tital Control Loss Total Gate Charge	$\begin{aligned} R_G &= \Omega, V_{GE} = 15V, \\ &\text{Inductive Load}, \ T_C = 25^{\circ}\text{C} \end{aligned}$ $\begin{aligned} V_{CC} &= 300 \text{ V}, \ I_C = 20\text{A}, \\ R_G &= 10\Omega, \ V_{GC} = 15\text{V} \end{aligned}$ Inductive Load, $T_C = 125^{\circ}\text{C}$	    	3 5 35 10 10 30 30 37 110 80 500 310 810	1000  1000  200 250  1200 150	ns ns uJ uJ ns ns ns us

<u> </u>	Oate Links Onling .	1 \/ 15\/			20	50	110
Q <sub>cc</sub> Gale-Collector Chalge				25	40	nC	
11	Internal Emitter inductance	Measured 5mm	from PKG		14		nΗ
Electric	al Characteristics of DI	ODE T <sub>C</sub> = 25°C unless of	otherwise noted				
Symbol	Parameter	Test Cond	itions	Min.	Тур.	Max.	Units
V <sub>FM</sub>	Diode Forward Voltage	I <sub>F</sub> = 15A	$T_C = 25^{\circ}C$		1.4	1.7	V
			T <sub>C</sub> = 100°C		1.3		
	Diode Reverse Recovery Time		$T_C = 25^{\circ}C$		50	95	ns
<sup>t</sup> rr			T <sub>C</sub> = 100°C		74		
	Diode Peak Reverse Recovery	I <sub>F</sub> = 15A,	$T_C = 25^{\circ}C$		4.5	6.0	A nC
¹rr	Current	T <sub>C</sub> =	T <sub>C</sub> = 100°C		6.5		
Q <sub>rr</sub> Dic	Diode Reverse Recovery Charge		$T_C = 25^{\circ}C$		80	180	
			T <sub>C</sub> = 100°C		220		
	Symbol  V <sub>FM</sub> t <sub>rr</sub>	Calc-Collector Challed   Internal Emitter Inductance	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$

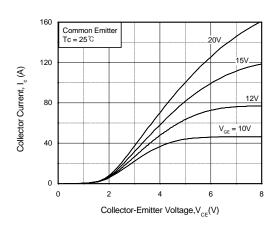



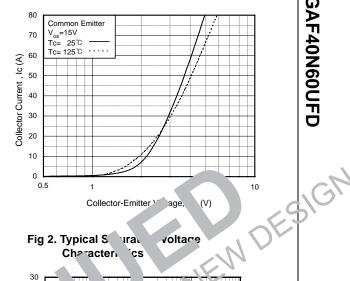


Fig 1. Typical Output Characteristics


Fig 2. Typical S \ura\ voltace Character cs

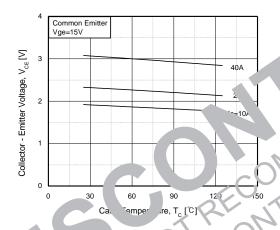



S اد. ltage ıra. Sas Temperature at Variant Current Level

Fig 4. Load Current vs. Frequency

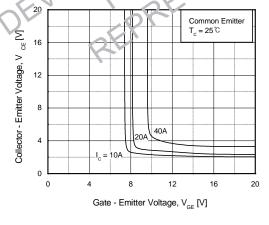

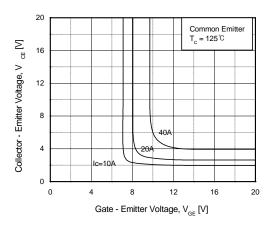
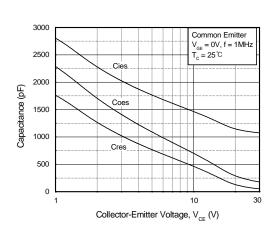


Fig 5. Saturation Voltage vs.  $V_{GE}$ 

Fig 6. Saturation Voltage vs.  $V_{\text{GE}}$ 

©2004 Fairchild Semiconductor Corporation FGAF40N60UFD Rev. 1





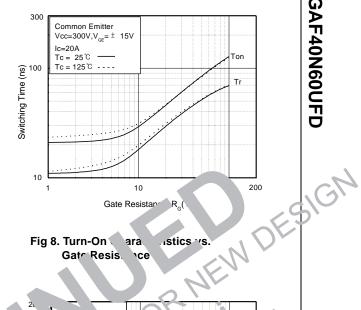


Fig 7. Capacitance Characteristics


Fig 8. Turn-On ara ıstics 's. Gate Resis. hce

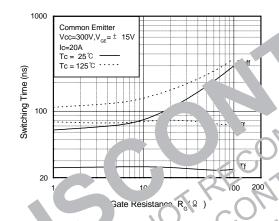

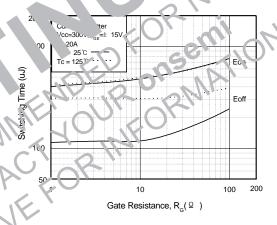

Turn-Off Characteristics 13. ate Resistance

Fig 10. Switching Loss vs. Gate Resistance

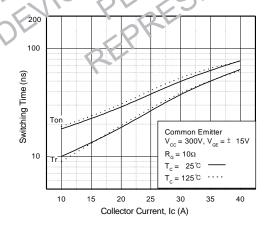

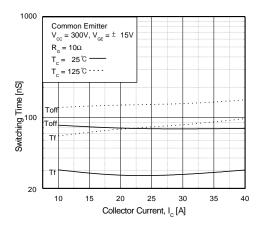
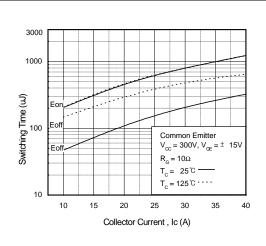


Fig 11. Turn-On Characteristics vs. **Collector Current** 

Fig 12. Turn-Off Characteristics vs. **Collector Current** 

©2004 Fairchild Semiconductor Corporation FGAF40N60UFD Rev. 1





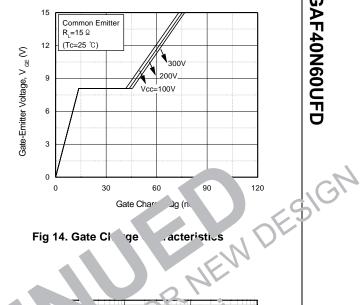


Fig 13. Switching Loss vs. Collector Current


Fig 14. Gate Clarge acteristics

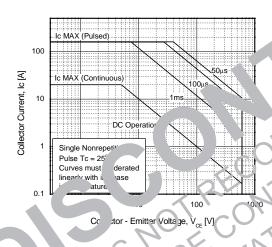

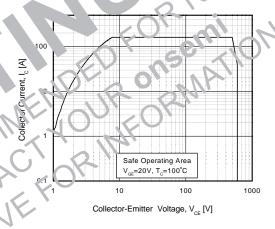


30A Characteristics

Fig 16. Turn-Off SOA Characteristics

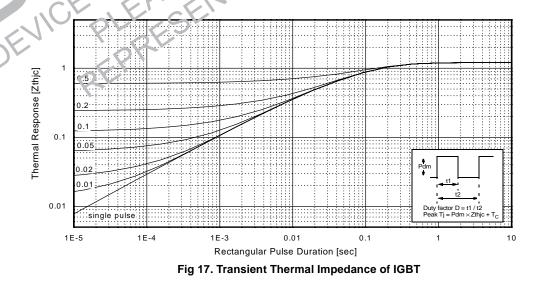

FGAF40N60UFD Rev. 1

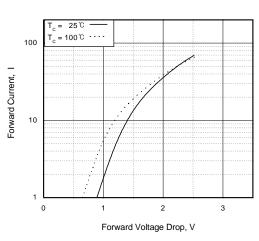

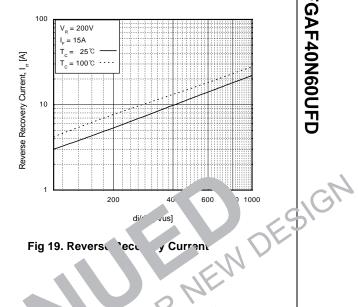
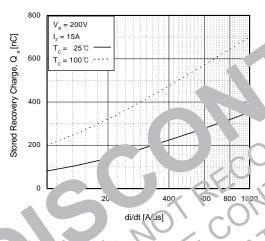


Fig 18. Forward Characteristics

Fig 19. Reverse 'ecc y Current




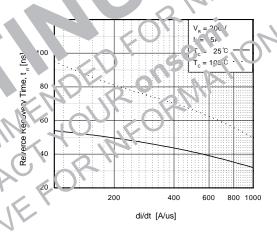


Fig 21. Reverse Recovery Time

FGAF40N60UFD Rev. 1

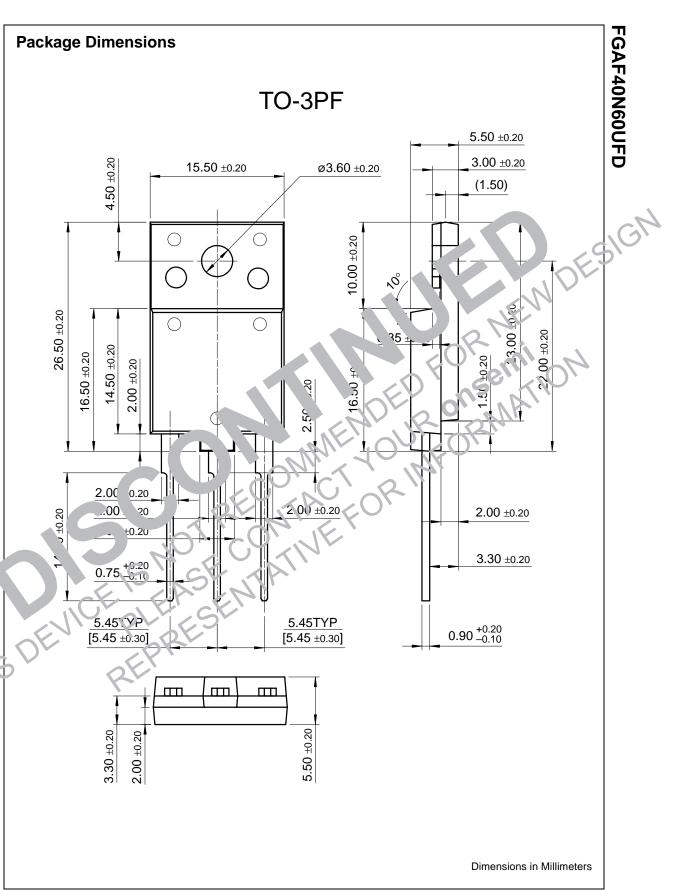

FGAF40N60UFD Rev. 1

### **TRADEMARKS**

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT Quiet Series™	ISOPLANAR™	$POP^TM$	Stealth™
ActiveArray™	FAST <sup>®</sup>	LittleFET™	Power247™	SuperFET™
Bottomless™	FASTr™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CoolFET™	FPS™	MicroFET™	PowerTrench <sup>®</sup>	SuperSOT™-6
CROSSVOLT™	FRFET™	MicroPak™	QFET <sup>®</sup>	SuperSOT™-8
DOME™	GlobalOptoisolator™	MICROWIRE™	QS™	SyncFET™
EcoSPARK™	GTO™	MSX™	QT Optoelectronics™	TinyLogic <sup>®</sup>
E <sup>2</sup> CMOS™	HiSeC™	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	I <sup>2</sup> C <sup>TM</sup>	$OCX^{TM}$	RapidConfigure™	nslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC.
Across the board.	. Around the world.™	OPTOLOGIC <sup>®</sup>	SILENT SWITC <sup>1</sup> . R <sup>®</sup>	'ltraFE ®
The Power Franc		OPTOPLANAR™	SMART STATION	\ X <sub>1</sub> ,
Programmable Ad	ctive Droop™	PACMAN™	SPM™	

### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHARGES. ITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OF DESIGN. FA TO LD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ALC. OF OT OR CIPCULT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS TALL THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT A PROVIDENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE TALL WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices of ten are devision systems which, (a) are intended for surgice of the into the body, or (b) support or sust life, or (a) whose failure to perform when proper to dimport a with instructions for use provided in the labeling, the real onably expectation results significant in the user

2. A critical component: any component of a life support revice or system whose failure to perform can be repsonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PR YUL STATUS DEFINITIONS

### **Defir ion of Terms**

Datasheer Identification	Product Status	Definition
Ance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2004 Fairchild Semiconductor Corporation Rev. 18



ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and severally, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify an

### **PUBLICATION ORDERING INFORMATION**

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com