

#### Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



October 1986 Revised February 2000

### **DM74ALS541** Octal Buffer and Line Driver with 3-STATE Outputs

#### **General Description**

This octal buffer and line driver is designed to have the performance of the DM74ALS240A series and, at the same time, offer a pinout with inputs and outputs on opposite sides of the package. This arrangement greatly enhances circuit board layout. The 3-STATE control gate is a 2-input NOR such that if either G1 or G2 is HIGH, all eight outputs are in the high impedance state.

#### **Features**


- Advanced oxide-isolated ion-implanted Schottky TTL process
- Switching performance is guaranteed over full temperature and V<sub>CC</sub> supply range
- Data flow-thru pinout (all inputs on opposite side from
- P-N-P Inputs reduce DC loading

#### **Ordering Code:**

Order Number	Package Number	Package Description
DM74ALS541WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
DM74ALS541SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
DM74ALS541N	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### **Connection Diagram**

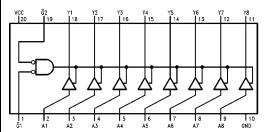

#### **Function Table**

	Input		
G1	G2	Α	Y
Н	Х	Х	Hi-Z
Х	Н	Х	Hi-Z
L	L	L	L
L	L	Н	Н

H = HIGH Logic Level

L = LOW Logic Level X = Don't Care (Either LOW or HIGH Logic Level)

Hi-Z = High Impedance (OFF) State

© 2000 Fairchild Semiconductor Corporation

www.fairchildsemi.com

#### Absolute Maximum Ratings(Note 1)

Supply Voltage 7V
Input Voltage: Control Inputs 7V

Voltage Applied to a Disabled

3-STATE Output 5.5V

Operating Free-Air Temperature Range  $0^{\circ}$ C to +70 $^{\circ}$ C Storage Temperature Range  $-65^{\circ}$ C to +150 $^{\circ}$ C

Typical  $\theta_{\text{JA}}$ 

 N Package
 58.5°C/W

 M Package
 77.5°C/W

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

### **Recommended Operating Conditions**


Symbol	Parameter	Min	Nom	Max	Units
V <sub>CC</sub>	Supply Voltage	4.5	5	5.5	V
V <sub>IH</sub>	HIGH Level Input Voltage	2			V
V <sub>IL</sub>	LOW Level Input Voltage			0.8	V
I <sub>OH</sub>	HIGH Level Output Current			-15	mA
I <sub>OL</sub>	LOW Level Output Current			24	mA
T <sub>A</sub>	Free Air Operating Temperature	0		70	°C


#### **Electrical Characteristics**

over recommended free air temperature range

Symbol	Parameter	Test Conditions		Min	Тур	Max	Units
V <sub>IK</sub>	Input Clamp Voltage	$V_{CC} = Min, I_I = -18 \text{ mA}$				-1.2	V
V <sub>OH</sub>	HIGH Level	$V_{CC} = 4.5V \text{ to } 5.5V$	$I_{OH} = -0.4 \text{ mA}$	V <sub>CC</sub> - 2			
	Output Voltage	V <sub>CC</sub> = Min	$I_{OH} = -3 \text{ mA}$	2.4	3.2		V
			I <sub>OH</sub> = Max	2			
V <sub>OL</sub>	LOW Level	V <sub>CC</sub> = Min	I <sub>OL</sub> = 12 mA		0.25	0.4	mA
	Output Voltage		$I_{OL} = 24 \text{ mA}$		0.35	0.5	IIIA
I	Input Current at Maximum	$V_{CC} = Max, V_1 = 7V$				100	μА
	Input Voltage	VCC - IVIAX, VI - 7 V				100	μΛ
I <sub>IH</sub>	HIGH Level Input Current	$V_{CC} = Max, V_I = 2.7V$				20	μΑ
I <sub>IL</sub>	LOW Level Input Current	$V_{CC} = Max, V_I = 0.4V$				-100	μΑ
l <sub>OZH</sub>	HIGH Level 3-STATE	$V_{CC} = Max, V_{CC} = 2.7V$				20	μА
	Output Current	VCC - IVIAX, VO - 2.7 V				20	μΛ
I <sub>OZL</sub>	LOW Level 3-STATE	$V_{CC} = Max, V_{CC} = 0.4V$				-20	
	Output Current	$v_{CC} = \text{IVIAX}, v_O = 0.4v$				-20	μΑ
Io	Output Drive Current	$V_{CC} = Max$ , $V_O = 2.25V$		-30		-112	mA
Icc	Supply Current	V <sub>CC</sub> = Max	Outputs HIGH		6	14	
			Outputs LOW		15	25	mA
			Outputs Disabled		13.5	22	


Symbol	nmended operating free air temperatu  Parameter	Conditions	From (Input) To (Output)	Min	Max	Units
t <sub>PLH</sub>	Propagation Delay Time LOW-to-HIGH Level Output	$V_{CC} = 4.5V \text{ to } 5.5V,$ $R_1 = R_2 = 500\Omega,$	A to Y	4	14	ns
t <sub>PHL</sub>	Propagation Delay Time HIGH-to-LOW Level Output	C <sub>L</sub> = 50 pF	A to Y	2	10	ns
PZH	Output Enable Time to HIGH Level Output		G to Y	5	15	ns
PZL	Output Enable Time to LOW Level Output		G to Y	8	20	ns
PHZ	Output Disable Time from HIGH Level Output		G to Y	1	10	ns
PLZ	Output Disable Time from LOW Level Output		G to Y	2	12	ns

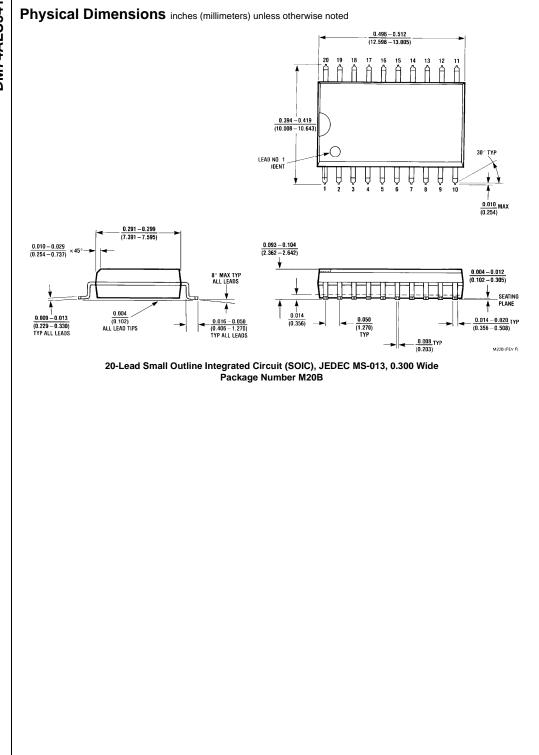

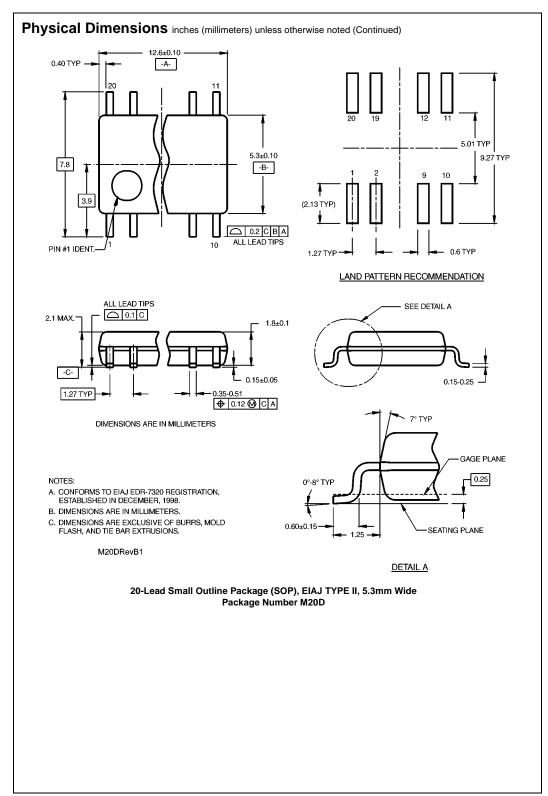

www.fairchildsemi.com

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued) 1.013-1.040 (25.73-26.42)

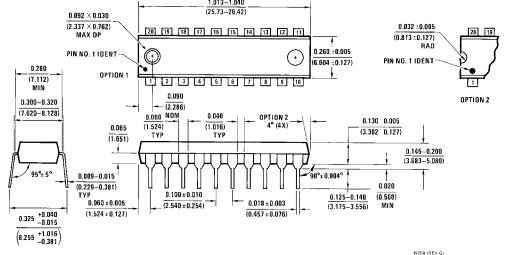

20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide Package Number N20A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hol

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com