



Low voltage fast-switching PNP power transistor



SOT-23



PNPB1C3E2

Features

- Very low collector-emitter saturation voltage
- High current gain characteristic
- Fast switching speed
- Miniature SOT-23 plastic package for surface mounting circuits

Applications

- Led
- Battery charger
- Motor and relay driver
- Voltage regulation

Description

The device is a PNP transistor manufactured using new "PB-HCD" (power bipolar high current density) technology. The resulting transistor shows exceptional high gain performances coupled with very low saturation voltage.

The complementary NPN is the 2STR1160.



Product status link

[2STR2160](#)

Product summary

Order code	2STR2160
Marking	2160
Package	SOT-23
Packing	Tape and reel

1 Electrical ratings

Table 1. Absolute maximum rating

Symbol	Parameter	Value	Unit
V_{EBO}	Emitter-base voltage ($I_C = 0$ A)	-5	V
V_{CBO}	Collector-base voltage ($I_E = 0$ A)	-60	V
V_{CEO}	Collector-emitter voltage ($I_B = 0$ A)	-60	V
I_C	Collector current	-1	A
I_{CM}	Collector peak current ($t_p < 5$ ms)	-2	A
P_{TOT}	Total power dissipation at $T_A = 25$ °C	500	mW
T_{stg}	Storage temperature range	-65 to 150	°C
T_J	Maximum operating junction temperature	150	°C

Table 2. Thermal data

Symbol	Parameter	Value	Unit
$R_{thJA}^{(1)}$	Thermal resistance, junction-to-ambient	250	°C/W

1. Device mounted on a PCB area of 1 cm².

2 Electrical characteristics

$T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

Table 3. Electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector cut-off current	$V_{CB} = -60\text{ V}$, $I_E = 0\text{ A}$			-0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB} = -5\text{ V}$, $I_C = 0\text{ A}$			-0.1	μA
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = -100\text{ }\mu\text{A}$, $I_E = 0\text{ A}$	-60			V
$V_{(BR)CEO}^{(1)}$	Collector-emitter breakdown voltage	$I_B = 0\text{ A}$, $I_C = -10\text{ mA}$	-60			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_C = 0\text{ A}$, $I_E = -100\text{ }\mu\text{A}$	-5			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = -0.5\text{ A}$, $I_B = -50\text{ mA}$			260	mV
		$I_C = -1\text{ A}$, $I_B = -100\text{ mA}$			480	
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C = -1\text{ A}$, $I_B = -100\text{ mA}$			1.3	V
h_{FE}	DC current gain	$I_C = -0.5\text{ A}$, $V_{CE} = -2\text{ V}$	180		560	
		$I_C = -1\text{ A}$, $V_{CE} = -2\text{ V}$	45			
		$I_C = -2\text{ A}$, $V_{CE} = -2\text{ V}$		30		
	Resistive load					
t_{on}	Turn-on time	$I_C = -1.5\text{ A}$, $V_{CC} = -10\text{ V}$,		220		ns
t_{off}	Turn-off time	$I_{B1} = -I_{B2} = -150\text{ mA}$, $V_{BB(off)} = 5\text{ V}$		500		ns


1. Pulsed: Pulse duration = 300 μs , duty cycle $\leq 2\%$.

3 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

3.1 SOT-23 package information

Figure 1. SOT-23 package outline (dimensions are in mm)

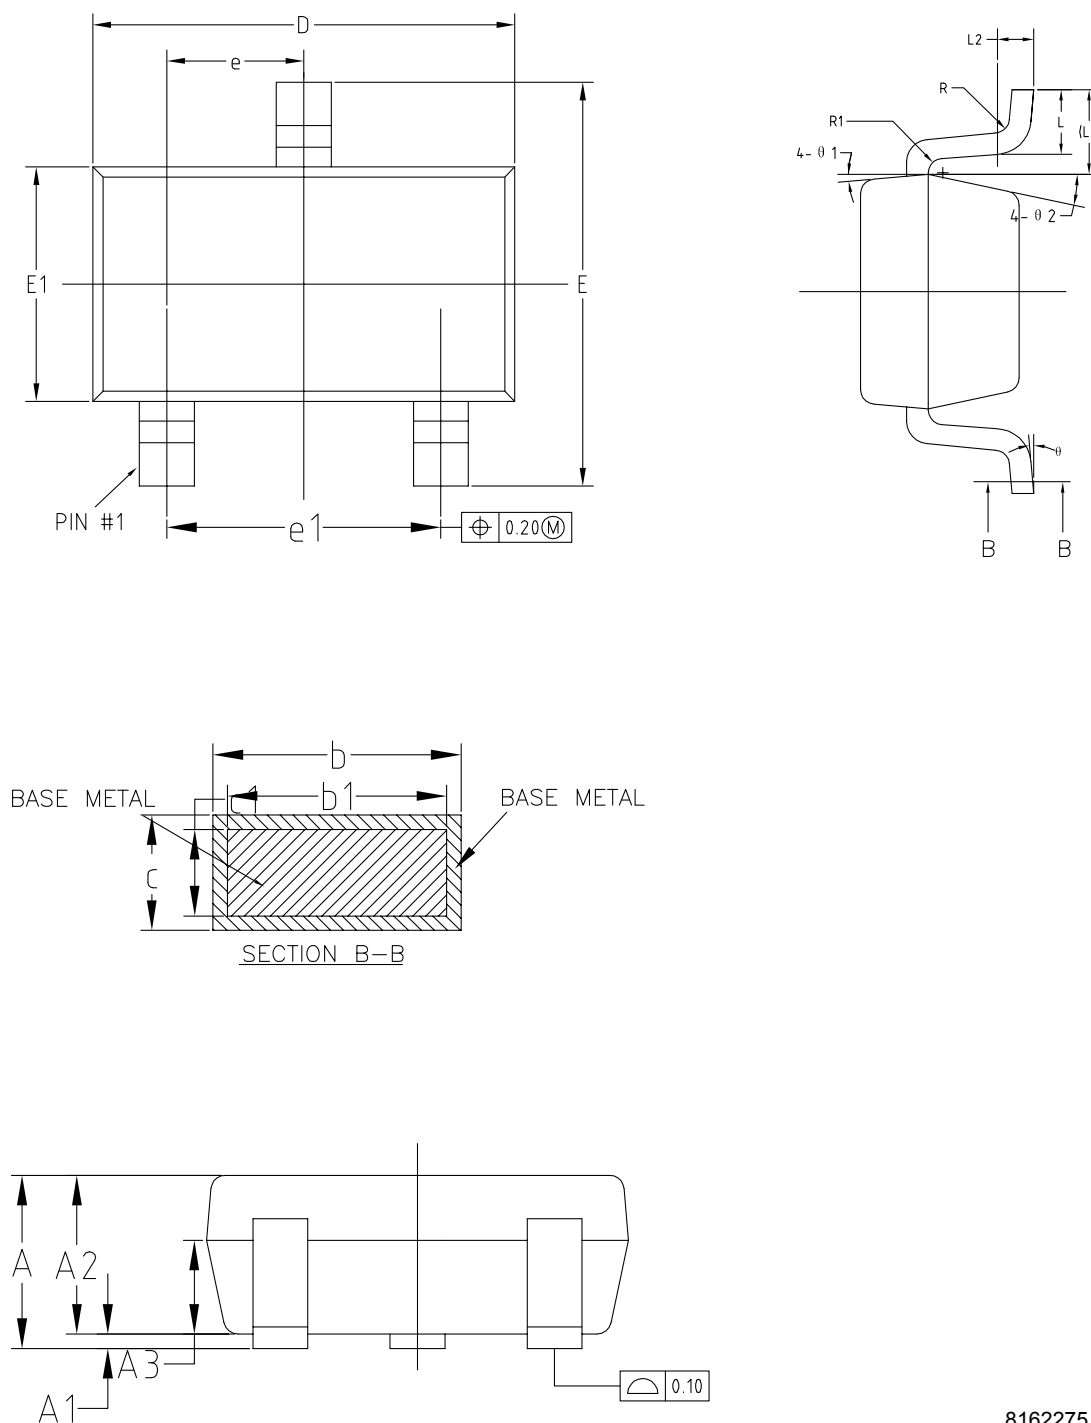


8162275_REV3

Table 4. SOT-23 package mechanical data

Ref.	mm		
	Min.	Typ.	Max.
A			1.25
A1	0		0.15
A2	1	1.10	1.20
A3	0.60	0.65	0.70
b	0.36		0.50
b1	0.36	0.38	0.45
c	0.14		0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1	0.59 REF		
L2	0.25 BSC		
R	0.05		
R1	0.05		
θ	0°		8°
θ1	3°	5°	7°
θ2	6°		14°

Figure 2. SOT-23 recommended footprint (dimensions in mm)

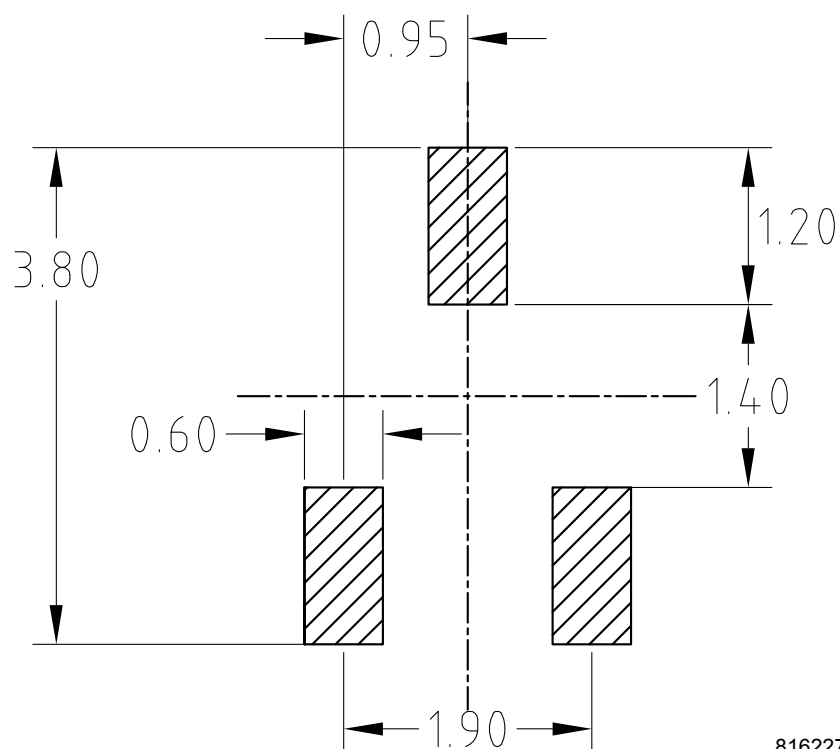

8162275_footprint_REV3

Revision history

Table 5. Document revision history

Date	Revision	Changes
18-Jun-2008	1	Initial release.
08-May-2014	2	Updated <i>Section 3: "Package mechanical data"</i> .
13-Mar-2015	3	Updated marking in <i>Table 1: "Device summary"</i>
21-Feb-2025	4	Updated Section 3.1: SOT-23 package information . Minor text changes.

Contents

1	Electrical ratings	2
2	Electrical characteristics.....	3
3	Package information.....	4
3.1	SOT-23 package information	4
	Revision history	7

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved