

M BZ-2AQ1842-PC2

DRAWING
NUMBER
7

ISSUE

REVISIONS

A	CO45324
J	A P
31	JAN 79
B	CO62404
T	L B
29	JAN 88
C	CO-67851-A
14	AUG 90
D	CO-71942-A
J	W B
18	SEP 92
E	CO-77426-B
D	L Y
29	JUN 94
F	CO-82133
CSL	1 AUG 96

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76

14 JUN 76



14 JUN 76

14 JUN 76

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2AQ1842-PC2

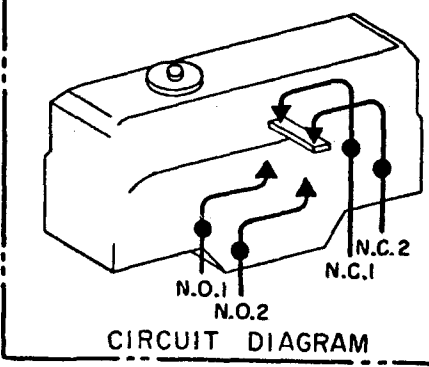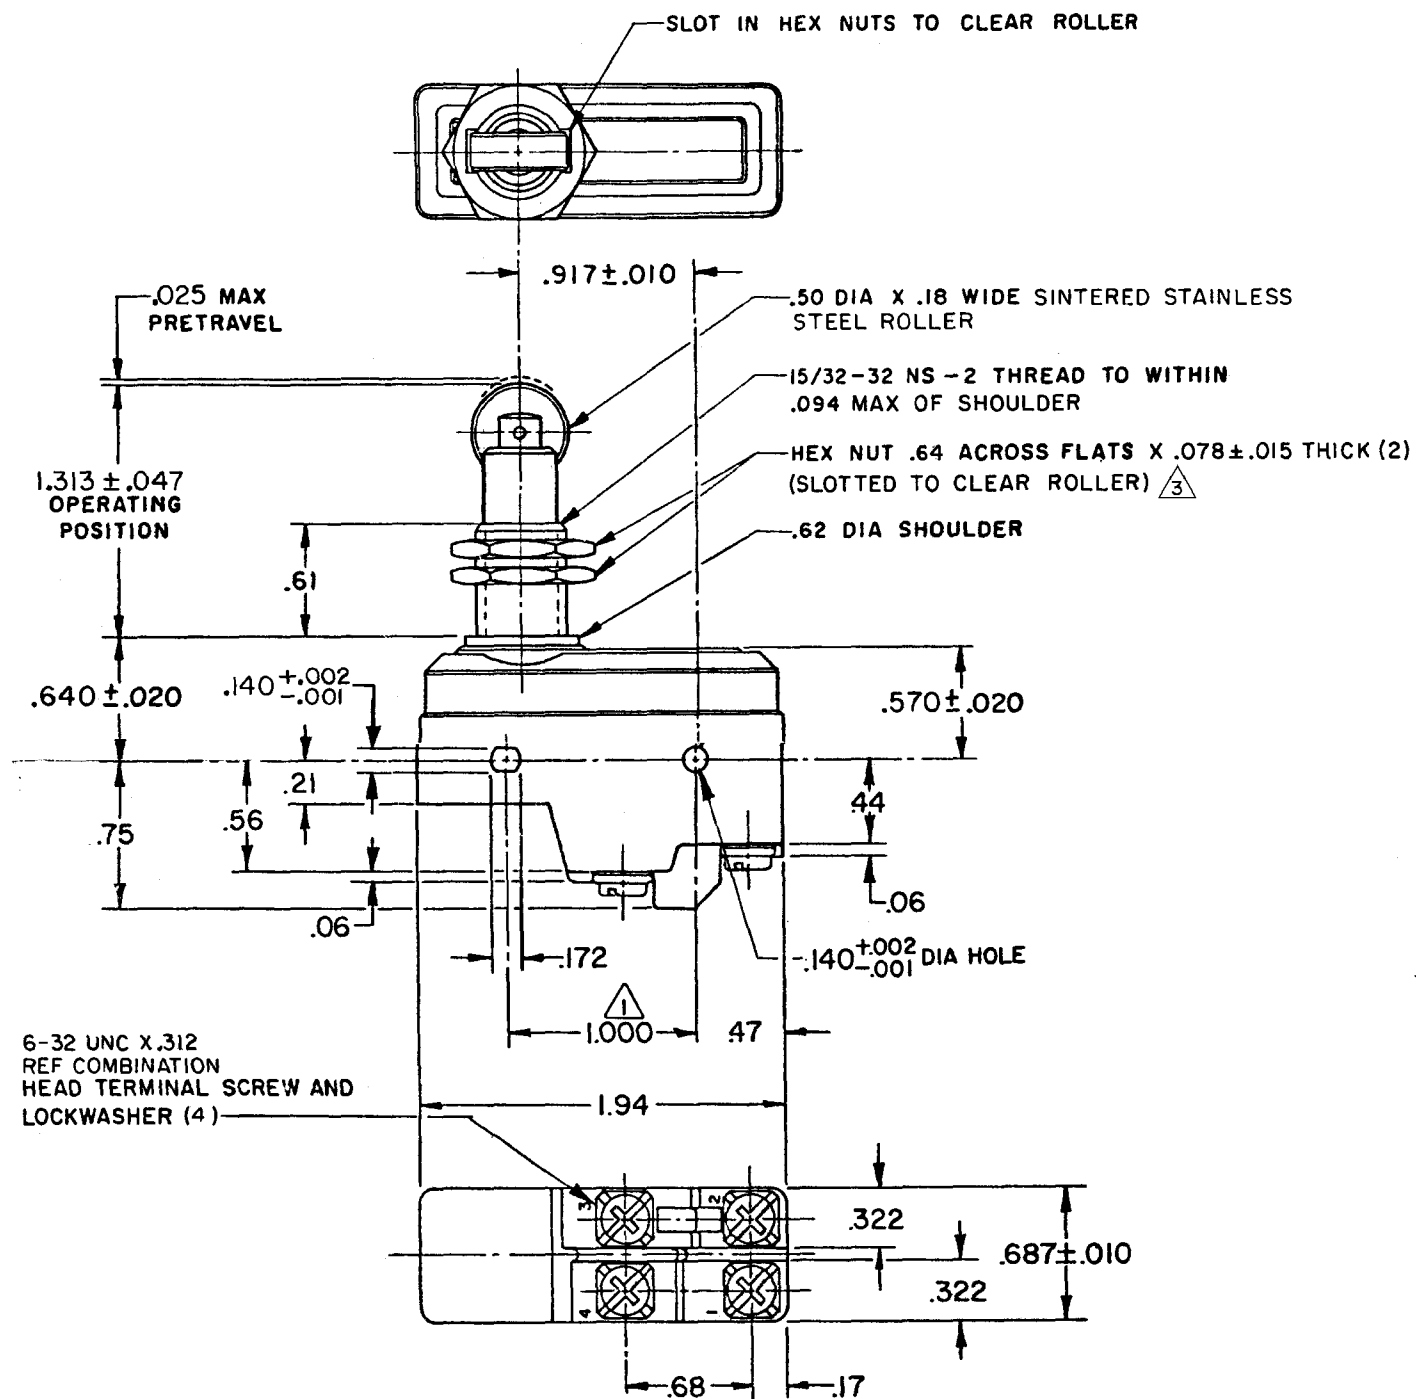

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
 - 2 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER
 - 3 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

CHARACTERISTICS	
OPERATING FORCE	14-24 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.001-.004
OVERTRAVEL	.141 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT SEE CIRCUIT DIAGRAM	
UL LISTED - FILE E12252 CODE L73 15A-125, 250 OR 480 VAC 1A-125 VDC; 0.5A-250 VDC 1/4HP-125 VAC; 1/2HP-250 VAC	

TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±			
DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X 1/04	X X	0.81/03
ONE PLACE	X, X 0.4/016	X, XX	0.38/016
TWO PLACES	X, XX 0.15/006	X, XXX	0.12/005
THREE PLACES			
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
RAW MATERIAL-COMMERCIAL STANDARD			
MICRO SWITCH STANDARDS APPLY			
DIMENSIONS ARE TO BE MET BEFORE			

FORMTEK
FO-5285 1-A

DRAWN

Downloaded from Arrow.com