


S8 RELAY SERIES

MINIATURE HIGH VOLTAGE RELAY

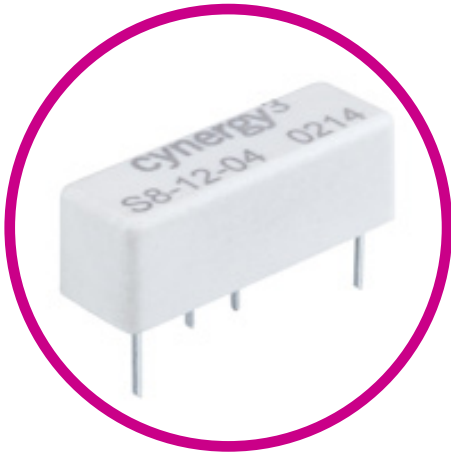

The S8 series is a miniature high voltage reed relay for applications where space saving is a prime consideration.

The coil pins are positioned near the center of the relay while the contact pins are near the ends to give improved isolation between the High Voltage contacts and the low voltage coil.

Features

- Space saving package
- Isolation Voltage across contacts 4kV or 5kV (dependent on coil voltage)
- Isolation Voltage 7kV contact to coil
- 2.5A carry current
- Up to 1000V switching voltage

SPECIFICATIONS

Contact		Condition	5V coil	12V coil	24V coil
Switch Action			SPST (Form A)		
Material			Rhodium		
Isolation Across Contacts	kV	DC or AC peak	4	4	5
Switching Power Max.	VA	(W for V variants)	100		
Switching Voltage Max.	V		350dc/300ac (1000Vdc & ac peak for V variants)		
Switching Current Max.	A	DC or AC peak	1.0		
Carry Current Max	A	DC	2.5		
Capacitance Across Contacts	pF	coil to screen grounded	0.5 (typical)		
Lifetime Operations		dry switching	10 ⁹		
		100W switching	10 ⁷		
Contact Resistance	mΩ max		150		
Insulation Resistance	Ωmin (typical)		10 ¹⁰ (10 ¹³)		
Coil					
Must Operate Voltage	V	DC	4	9.6	19
Must Release Voltage	V	DC	1	2	3
Operate Time	ms	diode fitted	1	1	1
Release Time	ms	diode fitted	0.5	0.5	0.5
Resistance	Ω		120	750	1550
Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)					

Relay		Condition	5V coil	12V coil	24V coil
Isolation Contact/Coil	kV		7		
Insulation Resistance Contact to all Terminals	$\Omega_{\min}$ (typical)				
Environmental Conditions					
Operating Temp Range	°C		-40 to +85		
Storage Temp Range	°C		-40 to +125		


STANDARD PARTS

	Coil Voltage Vdc	Isolation Across Contacts kV	Max. Switching Voltage Vdc (Vac peak)
S8-0504	5	4	350 (300)
S8-0504V	5	4	1000 (1000)
S8-1204	12	4	350 (300)
S8-1204V	12	4	1000 (1000)
S8-2405	24	5	350 (300)
S8-2405V	24	5	1000 (1000)

Custom versions can be designed for particular applications. Please contact Sensata with your requirements.

DIMENSIONS

All dimensions are in millimeters.

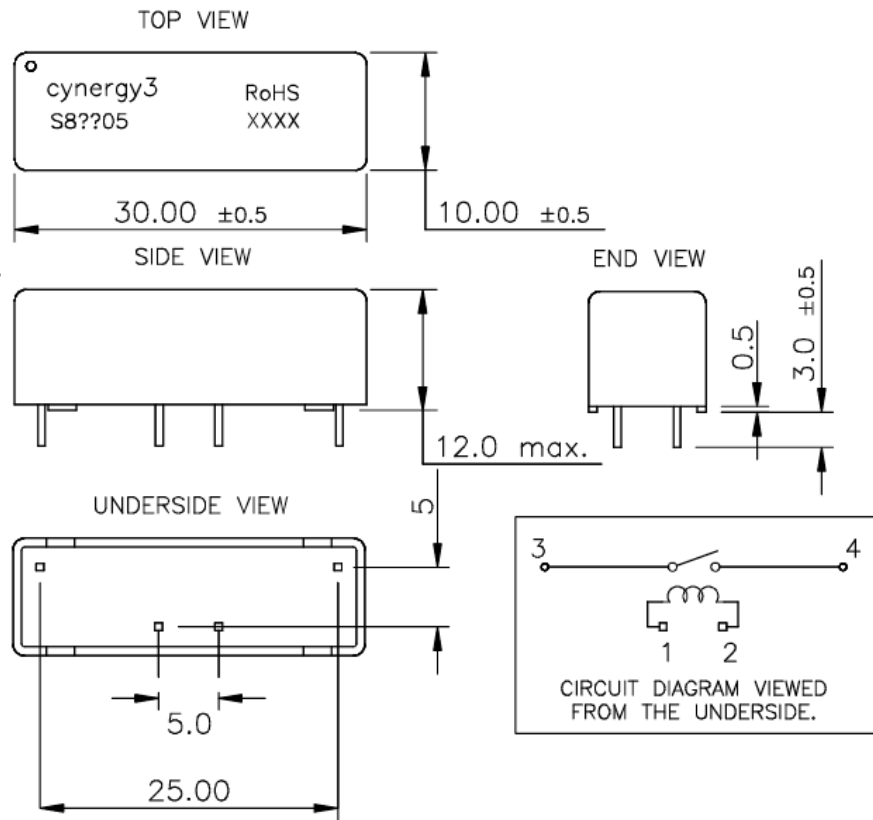

Pins 0.635mm Square ±0.05mm.

Pins 1 & 2 Tin over Nickel plated, on CuSn6 Phosphor Bronze.

Pins 3 & 4 Tin plated on NiFe Nickel Iron.

Case Material Nylon.

Encapsulant: Epoxy

Please refer to this document for circuit design notes:

<https://www.cynergy3.com/blog/reed-relay-application-notes>

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

Sensata Technologies
Jan Tinbergenstraat 80
7559 SP Hengelo
The Netherlands
1-508-236-3800
+44 (0)1202 897969
cynergy3.enquiries@sensata.com