
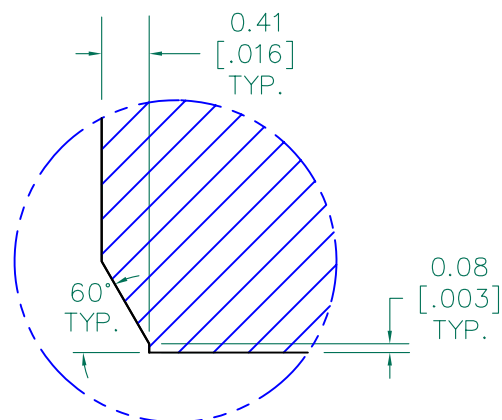


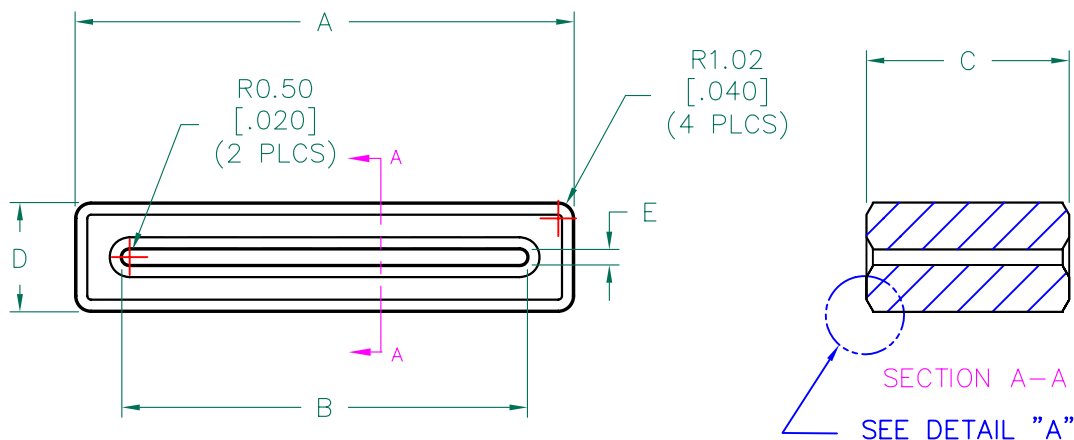


DETAIL "A"
CHAMFER
SCALE=15:1
(TYPICAL)

**UNCONTROLLED
DOCUMENT**

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	53 Ω	141 Ω	344 Ω
Minimum	- Ω	127 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

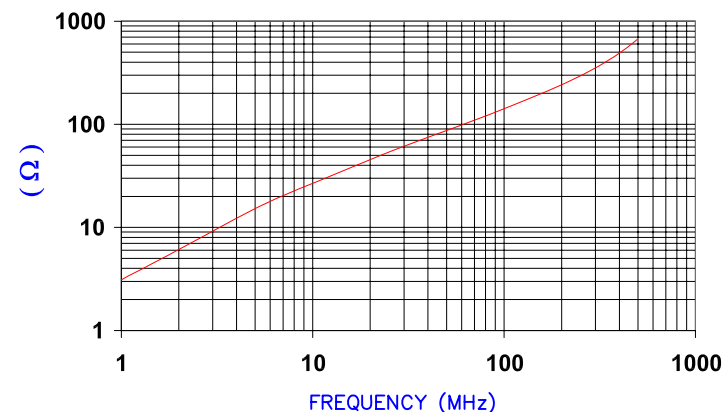


AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF# 5425

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	32.00 [1.260]	±	0.64 [.025]
B	26.00 [1.024]	±	0.45 [.018]
C	13.00 [.512]	±	0.46 [.018]
D	7.00 [.276]	±	0.46 [.018]
		+	0.50 [.020]
E	1.00 [.039]	-	0.30 [.012]

WEIGHT/1000 12.51 kgs [27.59 Lbs]

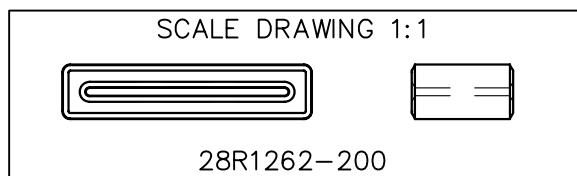

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird TECHNOLOGIES®				
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:		
28R1262-200				A	FERRITE RIBBON CORE	JUN		
A	ORIGINAL DRAFT	02/04/10	JUN	DATE:	02/04/10	SCALE:	2 : 1	MATERIAL:
REV	DESCRIPTION	DATE	INT	CAD #	28R1262-200-A	TOOL #	R1262	Ferrite