



FEATURES

- UL 60950 recognized
- RoHS compliant
- 4:1 Wide range voltage input
- Operating temperature range -40°C to 85°C
- Typical load regulation from 0.06%
- 1.5kVDC Isolation
- Typical efficiency to 87%
- 12V & 48V Nominal input
- Power density 0.94W/cm³
- UL 94V-0 Package materials
- No electrolytic capacitors
- Low noise
- Under voltage lock out
- Current fold back

PRODUCT OVERVIEW

The NCS6 series of DC/DC converters offers single & dual output voltages from input voltage ranges of 9-36V and 18-75V. The NCS6 is housed in an industry standard package with a standard pinout. The NCS6 is packaged in a metal case for improved EMI shielding and is also encapsulated for superior thermal performance.

Applications include telecommunications, battery powered systems, process control and distributed power systems.



For full details go to
www.murata-ps.com/rohs

NCS6 Series

Isolated 6W 4:1 Input Single & Dual Output DC/DC Converters

SELECTION GUIDE

Order Code ²	Input Voltage	Output Voltage	Output Current 100% Load	Input Current		Ripple & Noise (Typ.)	Efficiency		MTTF ¹
	Nom.			0% Load	100% Load		Min.	Typ.	
	V			mA	mA		%	%	
NCS6D1205C	12	±5	±0.6	7	610	15	80	82	384,470
NCS6D1212C	12	±12	±0.25	10	580	10	82	86	406,121
NCS6D1215C	12	±15	±0.2	12	580	20	84	87	344,957
NCS6S1203C	12	3.3	1.52	10	550	30	75	78	662,073
NCS6S1205C	12	5	1.2	7	610	30	79	82	521,975
NCS6S1212C	12	12	0.5	10	580	30	84	86	435,567
NCS6S1215C	12	15	0.4	12	580	30	85	87	437,582
NCS6D4805C	48	±5	±0.6	6	160	50	79	80	373,195
NCS6D4812C	48	±12	±0.25	7	150	30	82	84	391,563
NCS6D4815C	48	±15	±0.2	7	150	30	82	84	330,752
NCS6S4803C	48	3.3	1.52	10	150	40	73	76	483,460
NCS6S4805C	48	5	1.2	6	160	30	78	80	441,850
NCS6S4812C	48	12	0.5	7	150	30	82	84	408,555
NCS6S4815C	48	15	0.4	7	150	30	83	84	416,319

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	12V input types	9	12	36	V
	48V input types	18	48	75	
Under voltage lock out	Turn on threshold 12V input types		8.5		V
	Turn off threshold 12V input types		7.5		
	Turn on threshold 48V input types		16.7		
	Turn off threshold 48V input types		15.8		
Reflected ripple current	12V input types	Single output types		12	mA p-p
		Dual output types		4	
	48V input types	Single output types		9	
		Dual output types		6	

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated power	5V, 12V & 15V output types			6	W
	3.3V output types			5	
Voltage set point accuracy	Positive outputs			±2	%
	Negative outputs			±3	
Line regulation	Low line to high line	Positive outputs	0.002	0.2	%
		Negative outputs	0.09	0.7	
Load Regulation	10% total load to 100% total load	3V outputs	0.5	0.6	%
		5V positive outputs	0.3	0.5	
		12V & 15V positive outputs	0.06	0.2	
		All negative outputs	0.2	1.0	
Cross Regulation	% voltage change on negative output when positive load varies from 12.5% to 37.5% with negative load fixed at 50%	5V		5	%
		12V & 15V		2.5	
Start-up Time	3.3V & 5V output types	Single output types	2.5		mS
		Dual output types	25		
	12V output types	Single output types	4.6		
		Dual output types	11		
	15V output types	Single output types	5.5		
		Dual output types	14		

1 Calculated using MIL-HDBK-217F FN2, parts stress method with nominal input voltage at full load.

2. For shorter pin length, insert suffix 'L5' prior to the 'C', i.e. NCS6D1205L5C.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 seconds	1500			VDC
Resistance	Viso = 1kVDC	1			GΩ
Capacitance			225		pF

ABSOLUTE MAXIMUM RATINGS

Short-circuit protection (for SELV input voltages)	Continuous
Internal power dissipation	2.1W
Lead temperature 1.0mm from case for 10 seconds (to JEDEC JESD22-B106 ISS C)	260°C
Minimum output load for specification (see application notes)	10% of rated load
Input voltage, NCS6 12V input types	40V
Input voltage, NCS6 48V input types	80V

GENERAL CHARACTERISTICS¹

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency			180		kHz

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Operation		-40		85	°C
Storage		-50		125	
Case temperature rise above ambient	100% Load, Nom VIN, Still Air	48VIN Dual outputs	5V	36	
			12V	32	
			15V	31	
		All other output types	3.3V	32	
			5V	32	
			12V	28	
			15V	26	
Thermal shutdown	Case Temperature		105		

APPLICATION NOTES

Output Capacitors

The NCS6 series does not require output capacitors to meet datasheet specification. To meet datasheet specification, total output capacitance should not exceed:

Output Voltage (V)	Output Capacitance (μF)
3.3	470
5	470
12	220
15	220

Minimum Load

The minimum load to meet full datasheet specification is 10% of the full rated load across the specified input voltage range.

Between 0% and 10% output loading, the output voltage will remain within data sheet specification however, output ripple and noise will increase as well as a decrease in accuracy on negative outputs.

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NCS6 series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1.5kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NCS6 has been recognized by Underwriters Laboratory for functional isolation. Both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NCS6 series has an ER ferrite core, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

SAFETY APPROVAL

The NCS6 series has been recognised by Underwriters Laboratory (UL) to UL 60950 for functional insulation in a maximum ambient temperature of 85°C and/or case temperature limit of 120°C (case temperature measured on the face opposite the pins). File number E179522 applies.

Note: This series gained UL 60950 recognition for products manufactured on or after datecode G1114, any NCS6 parts manufactured before this date code should not be considered UL 60950 recognized. Any NCS6 that is UL recognized will be printed with the UL logo. 

RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on this product series is a Gold flash (0.05-0.10 micron) over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs


CHARACTERISATION TEST METHODS

Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.


C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires
Measured values are multiplied by 10 to obtain the specified values.	

Differential Mode Noise Test Schematic

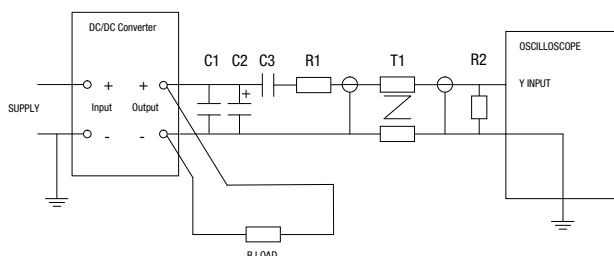


EFFICIENCY VS LOAD


NCS6S1203C

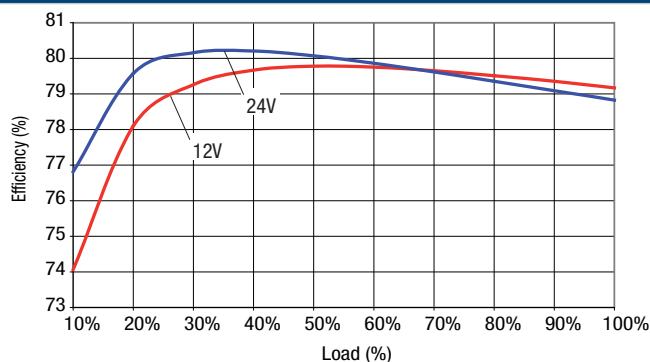


NCS6S1205C

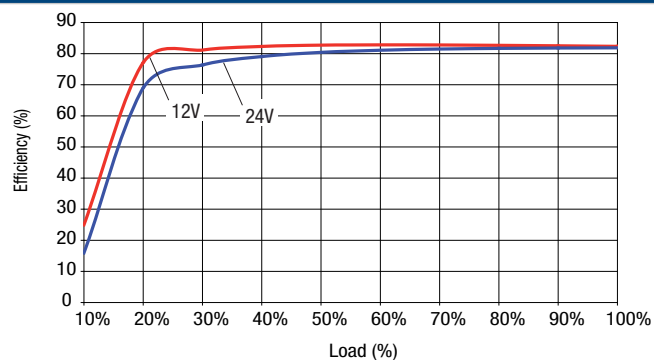


NCS6S1212C

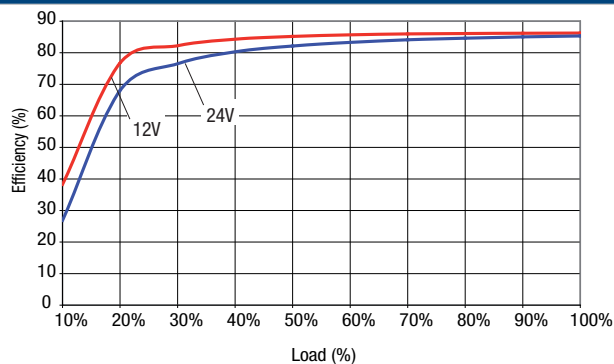


NCS6S1215C

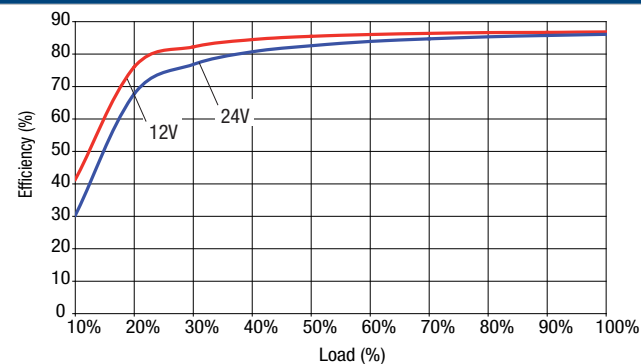


NCS6S4803C

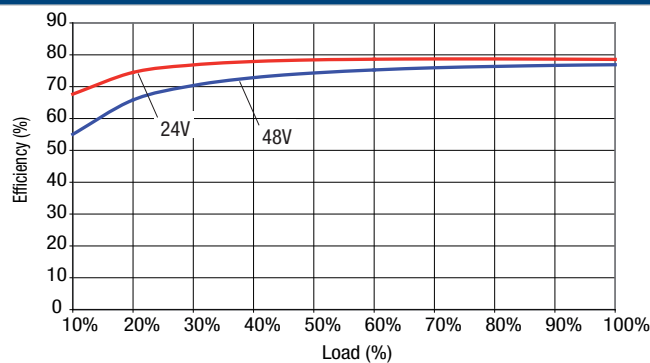


NCS6S4805C

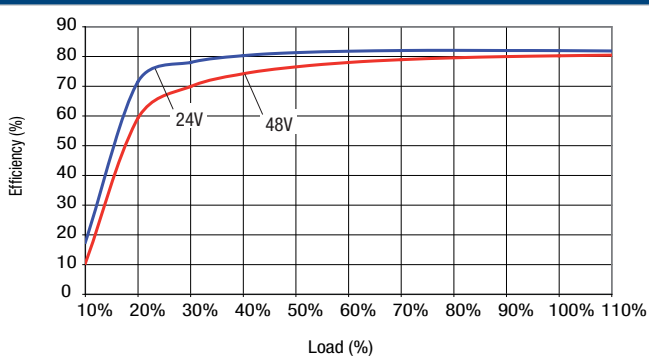

NCS6S4812C

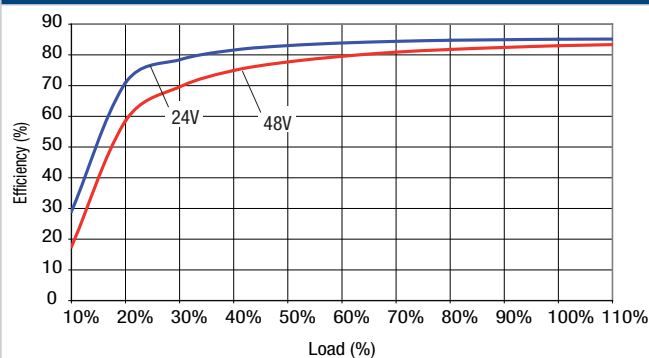


NCS6S4815C

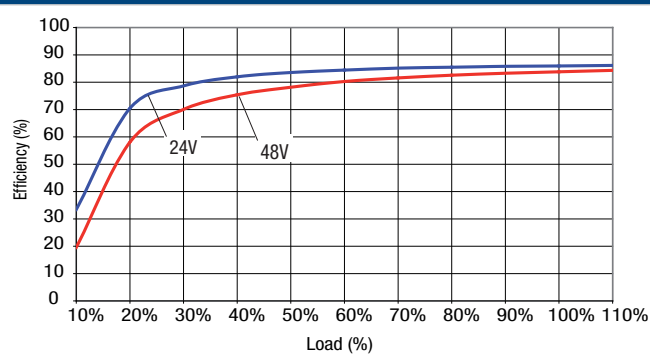


EFFICIENCY VS LOAD


NCS6D1205C

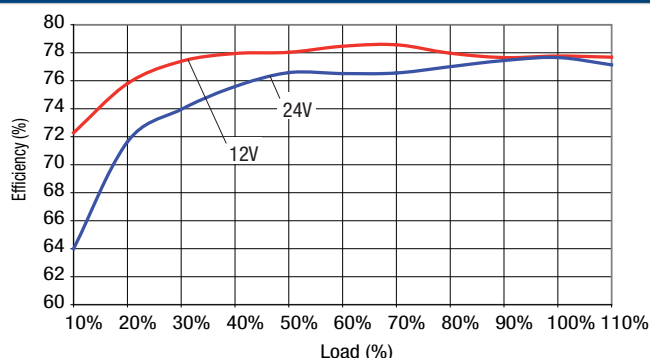


NCS6D1212C

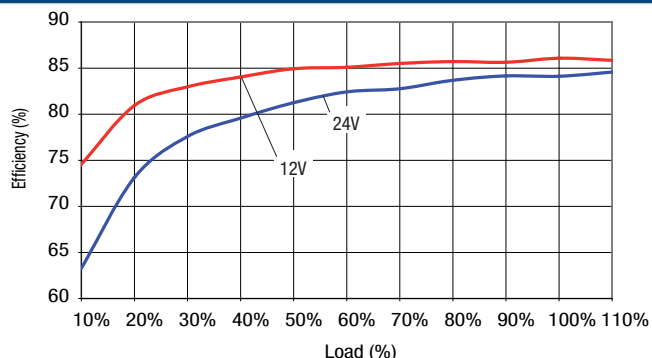


NCS6D1215C

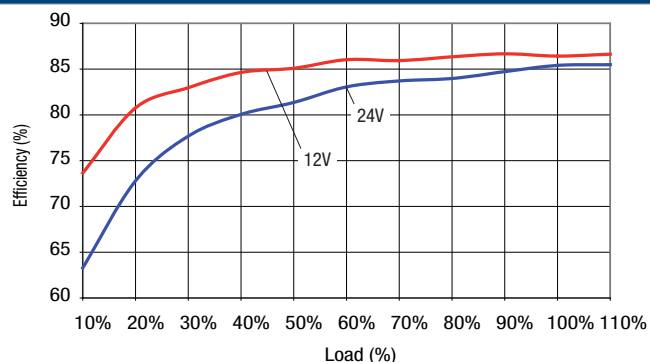


NCS6D4805C

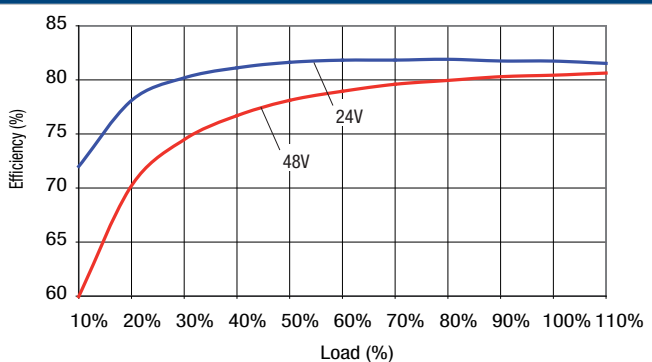

NCS6D4812C

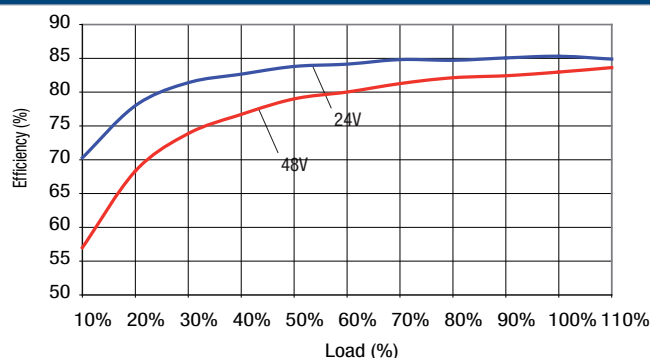


NCS6D4815C

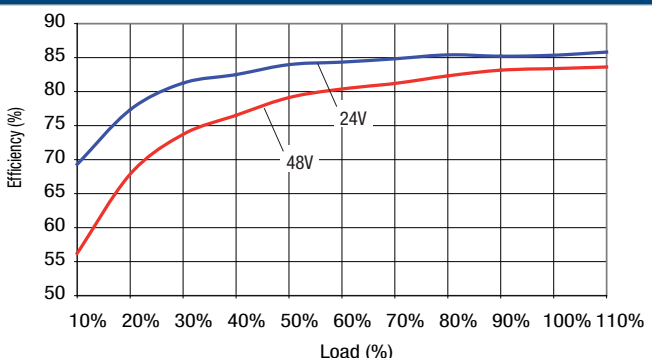


TEMPERATURE DERATING


NCS6S1203C

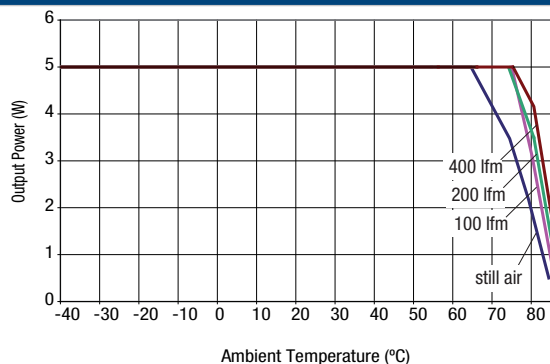


NCS6S1205C

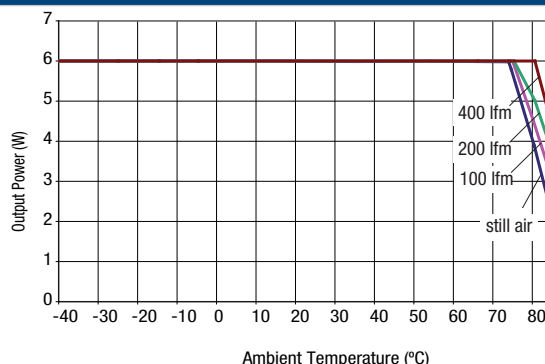


NCS6S1212C

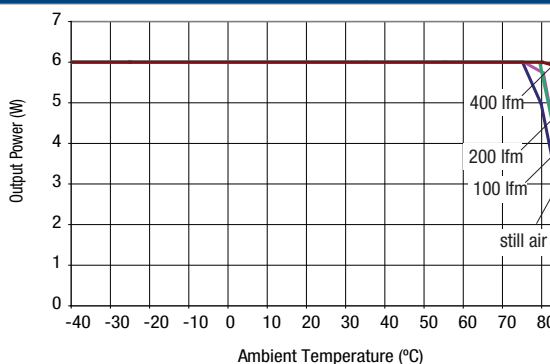


NCS6S1215C

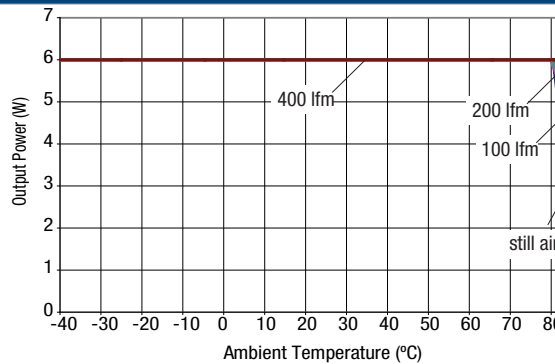


NCS6S4803C

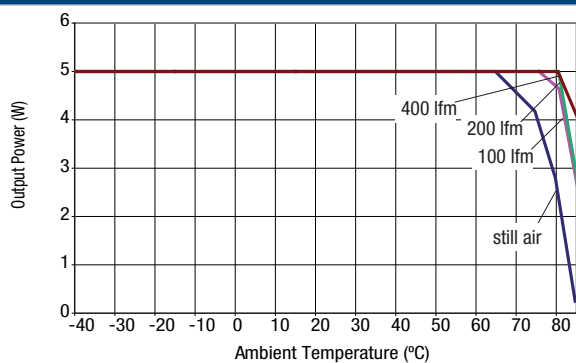


NCS6S4805C

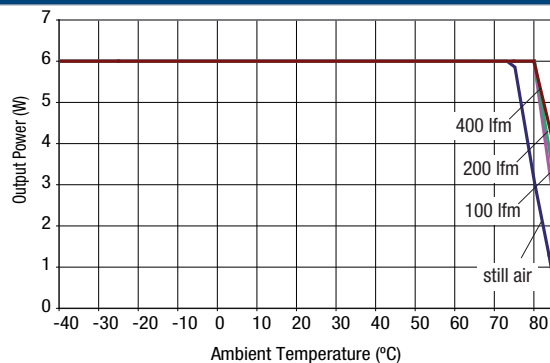

NCS6S4812C

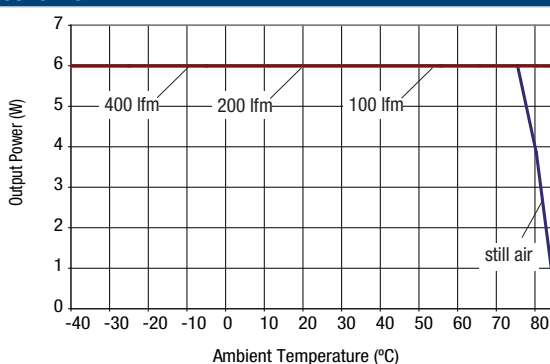


NCS6S4815C

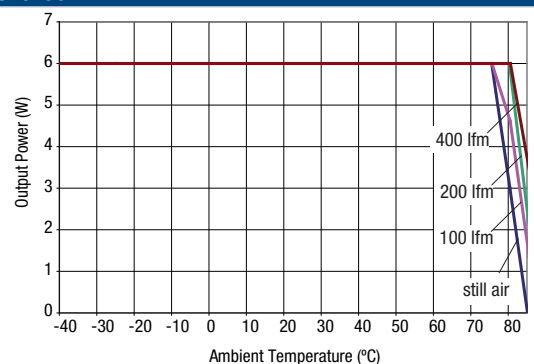


TEMPERATURE DERATING


NCS6D1205C

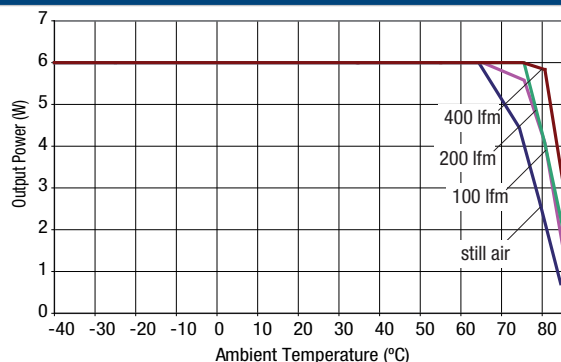


NCS6D1212C

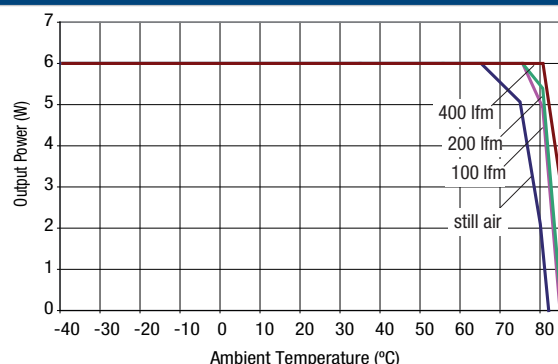


NCS6D1215C

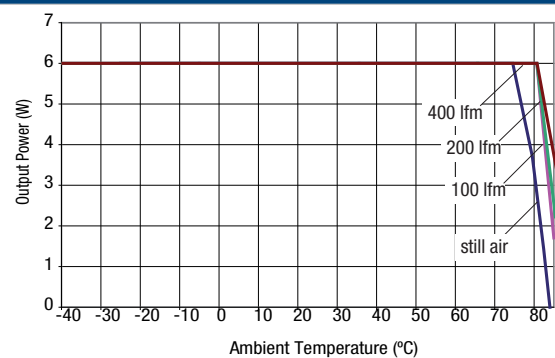


NCS6D4805C

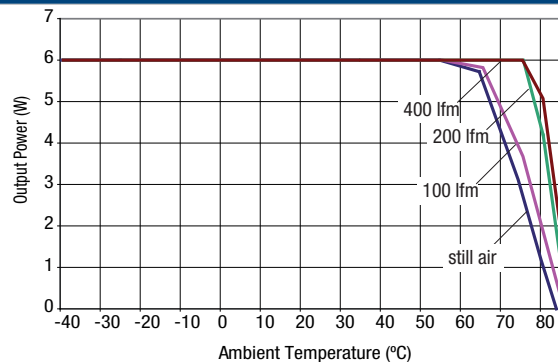

NCS6D4812C

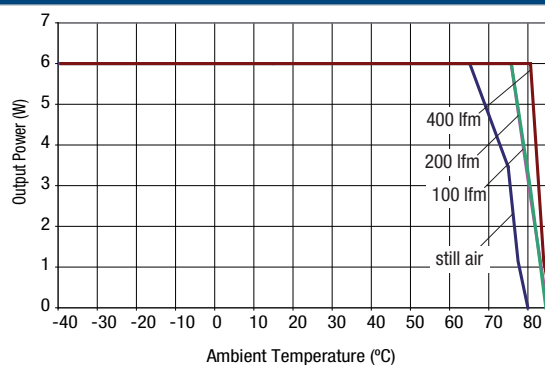

NCS6D4815C

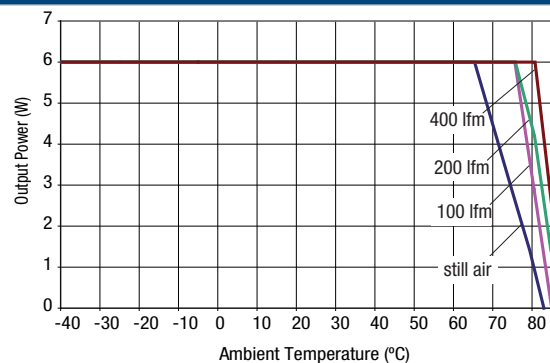


EMC FILTERING AND SPECTRA

FILTERING


The module includes a basic level of filtering, the following table shows the additional input capacitor typically required to meet EN 55022 Curve A Quasi-Peak EMC limit, as shown in the below plots.

NCS6D1205C	2.2 μ F	NCS6S1203C	4.7 μ F
NCS6D1212C	none	NCS6S1205C	4.7 μ F
NCS6D1215C	none	NCS6S1212C	10 μ F
NCS6D4805C	10 μ F	NCS6S1215C	10 μ F
NCS6D4812C	10 μ F	NCS6S4803C	4.7 μ F
NCS6D4815C	10 μ F	NCS6S4805C	10 μ F
		NCS6S4812C	10 μ F
		NCS6S4815C	10 μ F


NCS6D1205C

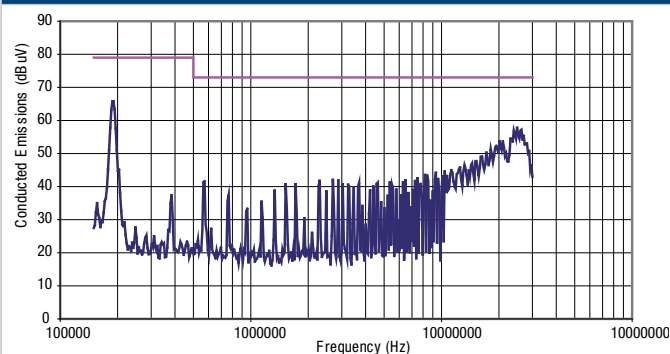


NCS6D1212C

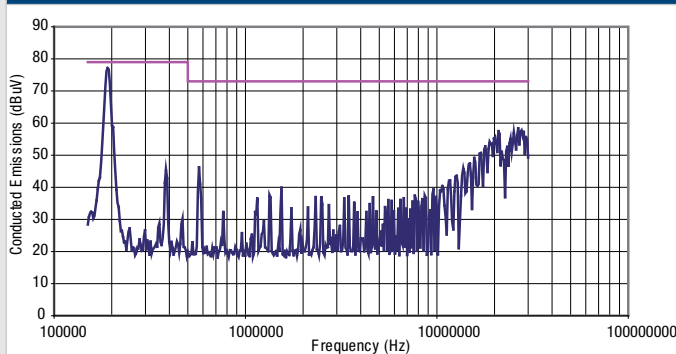


NCS6D1215C

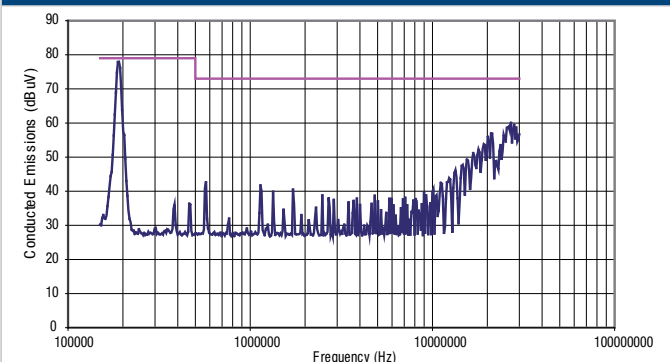


NCS6D4805C

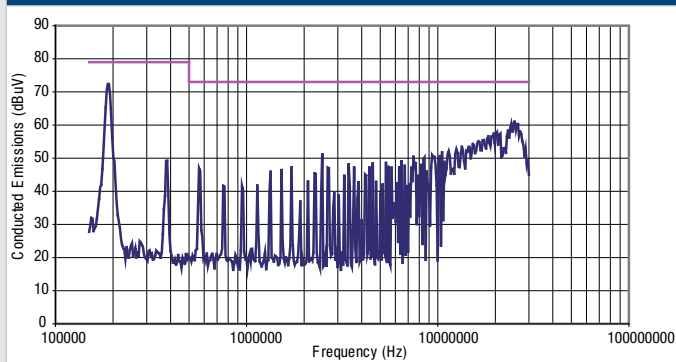

NCS6D4812C

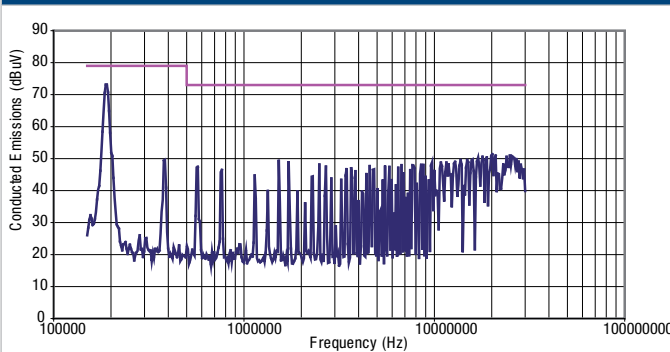


NCS6D4815C

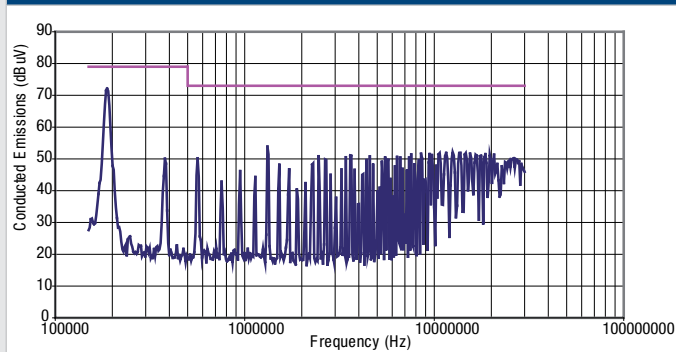


EMC FILTERING AND SPECTRA (continued)


NCS6S1203C

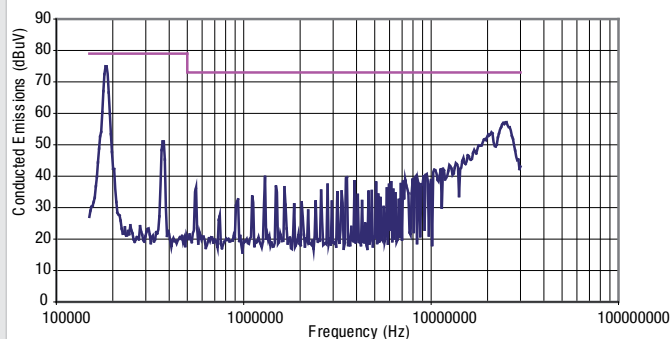


NCS6S1205C

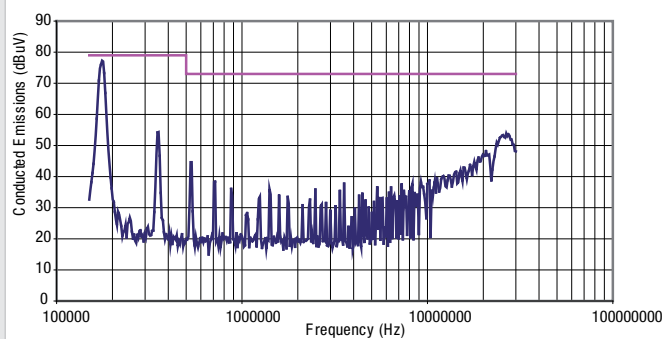


NCS6S1212C

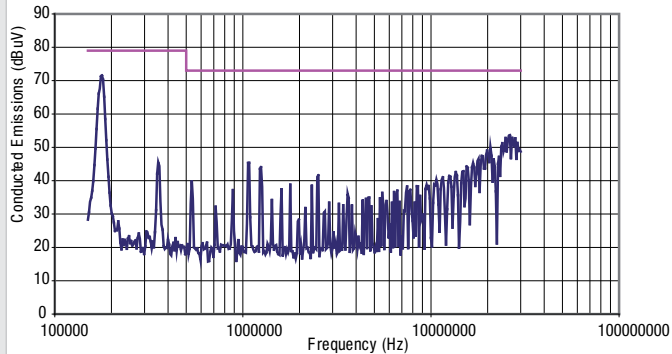


NCS6S1215C

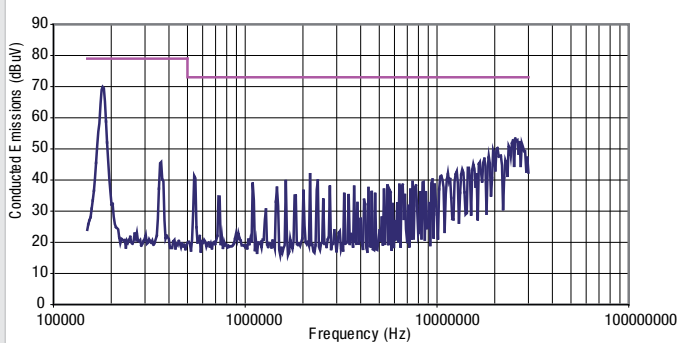


NCS6S4803C

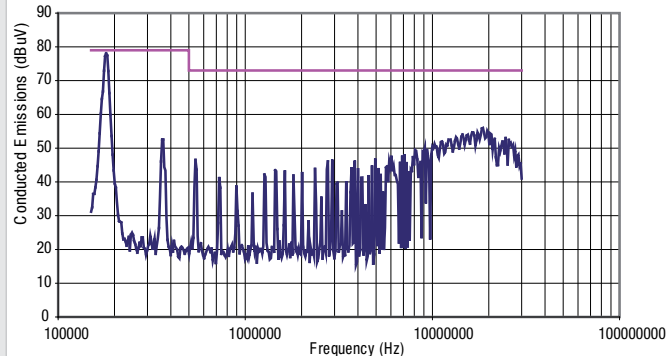


NCS6S4805C

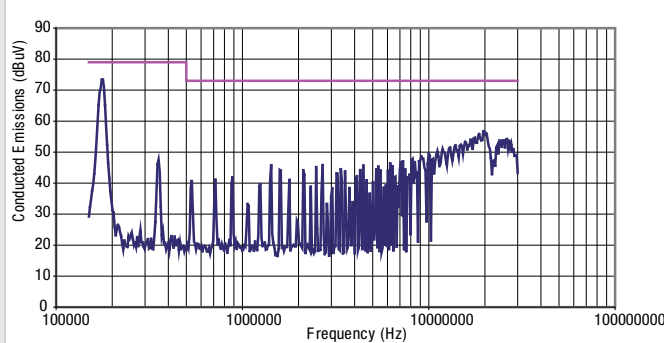

NCS6S4812C

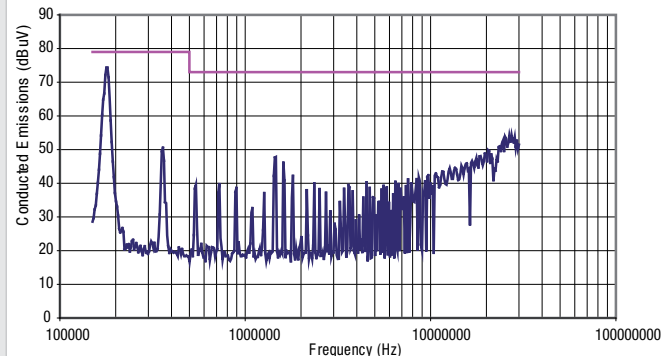


NCS6S4815C

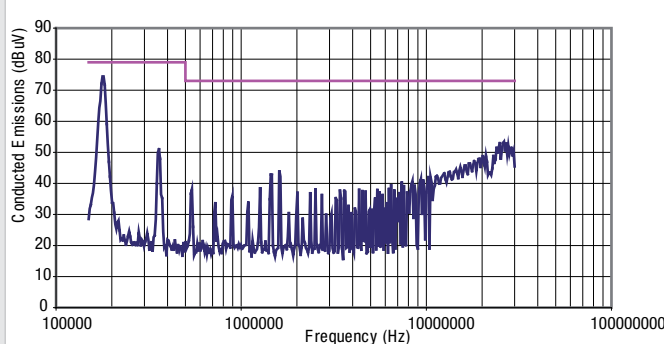

PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

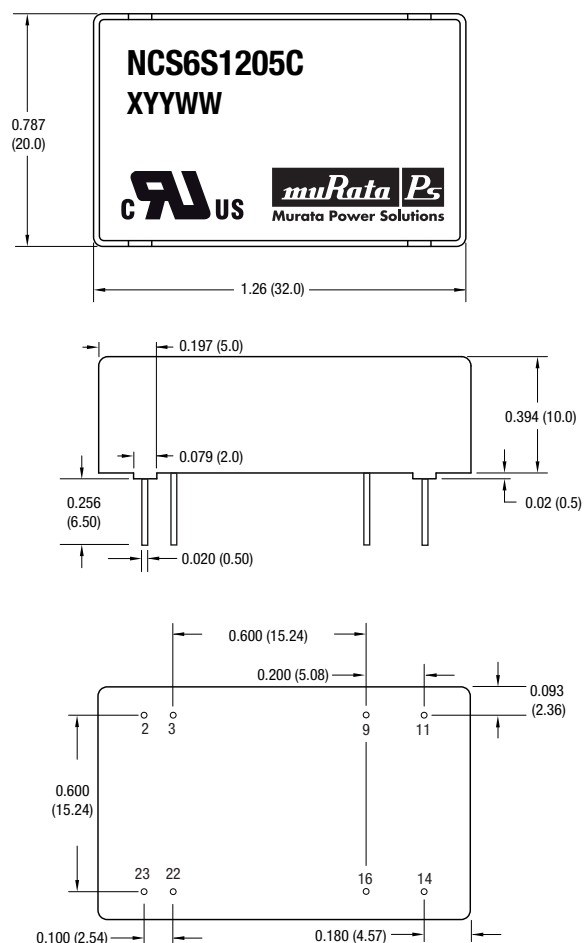

*L5 option pin length 0.197 (5.00).

All dimensions in inches (mm) ± 0.020 (0.5) except pin to pin tolerance ± 0.010 (0.25).
All pins on a 0.100 (2.54) pitch and within 0.010 (0.25) of true position.

The copper case is connected to the output (-V_{OUT}) pin. Care is needed in the design of this circuit board on which the converter is mounted. Top side tracks must not contact the edge of the case on the underside of the unit.


Please note that from 2010 onwards, you may receive either a blue or a black case.

Weight: 17g

PIN CONNECTIONS

Pin	Function	
	Single	Dual
2	-V _{IN}	-V _{IN}
3	-V _{IN}	-V _{IN}
9	No pin	0V
11	N/C	-V _{OUT}
14	+V _{OUT}	+V _{OUT}
16	-V _{OUT}	0V
22	+V _{IN}	+V _{IN}
23	+V _{IN}	+V _{IN}


TUBE OUTLINE DIMENSIONS



Tube length 20.47 (520))

All dimensions in inches ± 0.010 (mm 0.25mm). Quantity: 15

RECOMMENDED FOOTPRINT DETAILS



All dimensions in inches ± 0.010 ($\pm 0.25\text{mm}$).

Murata Power Solutions社(MPS社)製品の取り扱い上の注意

1. 製品の運搬時、電子部品等に力を加えたり、力が加わる様な作業をしないで下さい。
2. 以下のような環境条件では絶縁劣化を引き起こす危険性がありますので、設置及び保管しないでください。
 - ・ 本仕様書の規格外の高温、高湿の保存や直射日光の当たるところ。
 - ・ 腐食性ガス雰囲気(Cl₂、H₂S、NH₃、SO₂、NO_x等)。
 - ・ 水、油、有機溶剤等の液体がかかるところ。
 - ・ 塵埃の多いところ。
 - ・ その他、上記に準ずるところ。
3. 低分子シロキサン(ジメチルポリシロキサン)含有率の高いシリコンゴム、シリコンボンド等の使用により、ポリウムやポテンショメータ摺動子やスイッチ類の接点の接触不良が発生する場合があります。低分子シロキサン含有率は0.1%以下のものをご使用ください。
4. 製品に使用されている個々の部品は、周囲温度により、その信頼性と寿命(MTBF)は極端に短くなります。当データシートに定められている温度条件の範囲内で使用してください。

お願い

1. 本データシートは特に規定しない限り、電源単体での品質を規定するものです。ご使用に際しては御社製品に実装された状態で必ず評価、確認をして下さい。
2. 当製品に万が一異常や不具合が生じた場合でも、2次災害防止の為に、完成品に適切なフェールセーフ機能を必ず付加して下さい。
3. 当データシートに記載の製品について、その故障や誤動作が人命又は財産に危害を及ぼす恐れがある等の理由により、高信頼性が要求される以下の用途でのご使用をご検討の場合、又は、当データシートに記載された用途以外でのご使用をご検討の場合は、必ず事前に弊社営業部又は最寄りの営業所までご連絡下さい。
 - ①航空機器 ②宇宙機器 ③海底機器 ④発電所制御機器 ⑤防災/防犯機器 ⑥交通用信号機器
 - ⑦ 輸送機器(自動車、列車、船舶等) ⑧医療機器 ⑨情報処理機器 ⑩その他上記機器と同等の機器
4. 記載内容について、改良のため予告なく変更することや、供給を停止することがございますので、ご注文に際してはご確認下さい。記載内容にご不明の点がございましたら、弊社営業部までお問い合わせ下さい。
5. 製品によっては、お守りいただかないと発煙、発火等に至る可能性のある定格や注意(保管・使用環境、定格上の注意、実装上の注意、取扱上の注意)を記載しておりますので、必ずご覧下さい。
6. 当データシートに記載の製品の使用もしくは当データシートに記載の情報の使用に際して、当社もしくは第三者の知的財産権その他の権利にかかわる問題が発生した場合は、当社はその責を負うものではありません。また、これらの権利の実施権の許諾を行うものではありません。
7. 当データシートの製品が、「外国為替及び外国貿易法」に定める規制貨物等に該当するものについては、輸出する場合、同法に基づく輸出許可が必要です。
8. MPS社の製造工程では、モントリオール議定書で規制されているオゾン層破壊物資(ODS)は一切使用しておりません。