


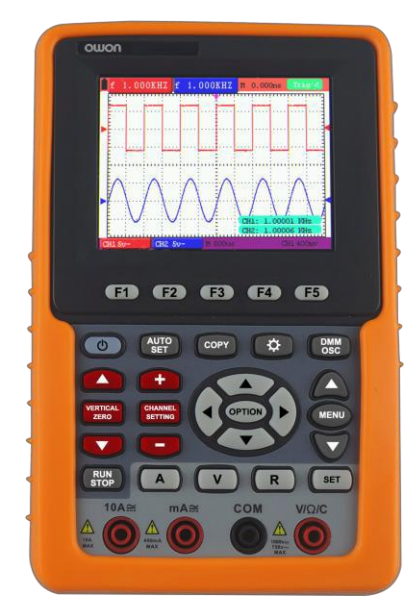

HDS-N HDS2061M-N

Handheld Digital Storage Oscilloscope

- + 2 in 1 (DSO + Multimeter)
- + Auto-scalefunction
- + FFT function
- + 20 group automatic measurement options
- + Bandwidth : 60MHz
- + USB data transmission supported
- + Rechargeable Li-ion battery
- + Waveform record andreplay
- + Multimeter newly supported SCPI

+ Performance Specifications

Model	HDS1021M-N
Bandwidth	60MHz
Sample Rate (real time)	500MS/s
Horizontal Scale (s/div)	5ns/div ~ 100s/div, step by 1 ~ 2.5 ~ 5
Rise Time (at input, typical)	≤ 17.5ns
Display	3.7 inch color display with TFT panel (640 × 480 pixels, 65535 colors)
Channel	single
Input Impedance	1MΩ ± 2%, in parallel with 20pF ± 5pF
Record Length	max 6K points on each channel
Interpolation	sin (x) / x
Probe Attenuation Factor	1X , 10X , 100X , 1000X
Input Coupling	DC, AC, and GND
DC Accuracy (average)	average >16 : ±(5% reading + 0.05div) for ΔV
Vertical Sensitivity	5mV/div ~ 5V/div (at input)
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)
Max Input Voltage	400V (PK - PK) (DC + AC, PK - PK, 1MΩ input impedance, probe attenuation 10 : 1), CAT II
Trigger Type	Edge, Video, Alternate
Trigger Mode	Auto, Normal, Single
Trigger Level	±6 divisions from screen center
Acquisition Mode	Sample, Peak Detect, and Average
DC Gain Accuracy	±3%
Automatic Measurement	Vpp, Vavg, Vrms, Freq ,Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Pre-shoot, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Delay A→B, Delay A→B
Waveform Math	+, −, ×, ÷, invert, FFT

Waveform Storage		4 waveforms
Lissajous	Bandwidth	full bandwidth
Figure	Phase Difference	±3 degrees
Communication Interface		USB
Power Supply		100V-240V AC, 50/60Hz
Li-ion Battery		7.4V, 6 hours operation
Dimensions (W × H × D)		180 × 115 × 40 (mm)
Weight (without package)		645 g

+ Multimeter Specifications

Full Scale Reading	$\frac{3}{4}$ digit (max 4000-count)	diode	0V-1.5V
	10 MΩ	On / Off Test	< 50 (± 30) beeping
Input Impedance	VDC : 400mV, 4V, 40V, 400V, 1000V : ±(1% ± 1 digit); max input : DC 1000V		
	VAC : 4V, 40V, 400V : ±(1% ± 3 digits), 750V : ±(2% ± 3 digits); Frequency : 40Hz - 400Hz; max input : AC 750V (virtual value)		
Voltage	DC : 40mA, 400mA : ±(1.5% ± 1 digit), 20A : ±(3% ± 3 digits)		
	AC : 40mA : ±(1.5% ± 3 digits), 400mA : ±(2% ± 1 digit), 20A : ±(5% ± 3 digits)		
Current	400Ω : ±(1% ± 3 digits), 40KΩ - 4MΩ : ±(1% ± 1 digit), 40MΩ : ±(1.5% ± 3 digits)		
Impedance	51.2nF - 100uF : ±(3% ± 3 digits)		
Capacitance			

Specifications subject to change without prior notice.

+ Application

- electronic circuit debugging
education and training
- circuit testing
automobile maintenance and testing
- design and manufacture

+ Accessories The accessories subject to final delivery.

Power Cord	CD Rom	USB	Probe	Probe Adjust	Multimeter Lead
Adapter	5V, 1KHz Output	Manual	Capacitance Ext Module	Soft Bag	Metal Case (optional)