

Discontinued

- · High Performance SAW Filter
- 5.0 x 5.0 mm Surface-mount Package
- Complies with Directive 2002/95/EC (RoHS)




Absolute Maximum Ratings

Rating	Value	Units	
Maximum Incident Power in Passband	+10	dBm	
Maximum DC Voltage Between any Two Active Terminals	6	VDC	
Storage Temperature Range in Tape and Reel	-40 to +85	°C	
Specification Temperature Range	-10 to +55	°C	
Operable Temperature Range	-45 to +125	°C	
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s		

SF2296C

312.00 MHz **SAW Filter**



Electrical Characteristics

Characteristic	Sym	Notes	Min	Тур	Max	Units
Nominal Center Frequency	f _C			312.00		MHz
Minimum Insertion Loss	IL _{MIN}			1.8	2.0	dB
Passband Ripple, f _C ± 12.5 kHz					1.0	dB _{P-P}
3 dB Bandwidth	BW ₃		25	300		kHz
20 dB Bandwidth	BW ₂₀			750	900	
30 dB Bandwidth	BW ₃₀			1050	1200	
Attenuation, referenced to IL _{MIN}						
297.0 to 311.2 MHz			15	25		dB
312.8 to 327.0 MHz			15	25		
Input Impedance			5	Ω 0		
Output Impedance			5	50 Ω		

Case Style	SM5050-8 5.0 x 5.0 mm Nominal Footprint	
Lid Symbolization, Y=year, WW=week, S=shift, Dot=pin 1 indicator	A48, <u>YWWS</u>	
Standard Reel Quantity Reel Size 7 Inch	500 Pieces/Reel	
Reel Size 13 Inch	3000 Pieces/Reel	


CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


- Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network ana-
- Únless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.

 Rejection is measured as attenuation below the minimum IL point in the
- passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42
- for details.
 "LRIP" or "L" after the part number indicates "low rate initial production"
- and "ENG" or "E" indicates "engineering prototypes."
- The design, manufacturing process, and specifications of this filter are subject to change.
- Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
- US and international patents may apply.


 Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Filter Response Plots

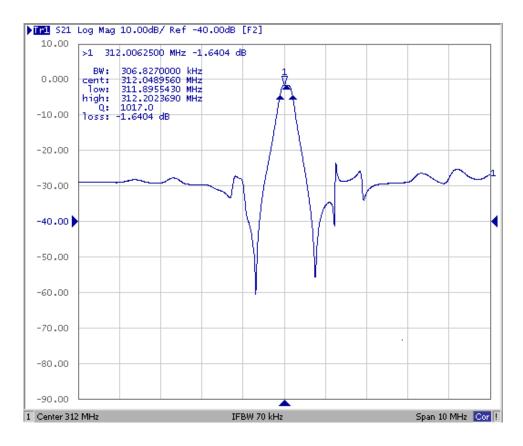

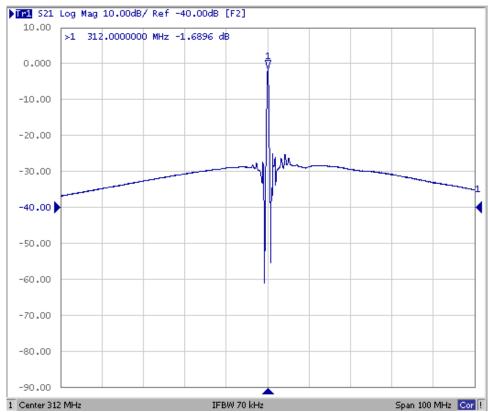


Input/Output Impedance Plots

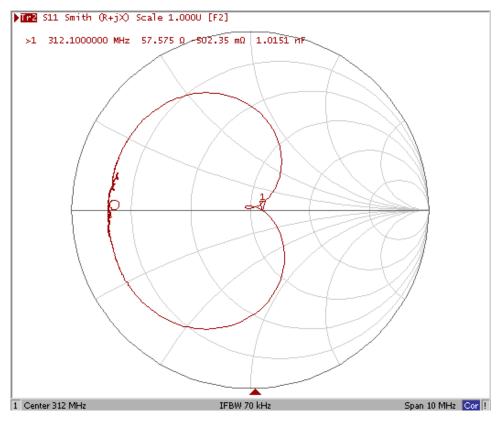

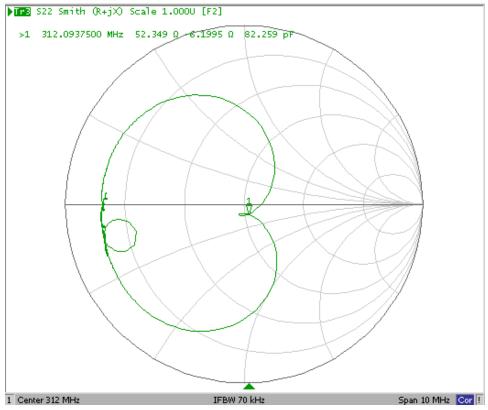



Filter Tuning Network Topology

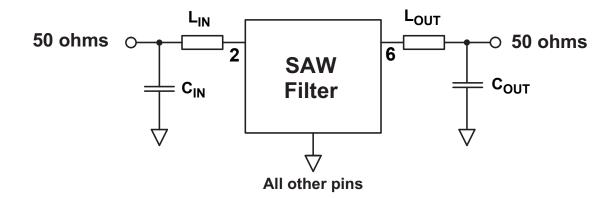

L_{IN} = L_{OUT} = 100 nH C_{IN}, C_{OUT} not required

SM5050-8 Surface-Mount 8-Terminal Ceramic Case 5.0 X 5.0 mm Nominal Footprint





Case Dimensions


Dimension	mm			Inches		
Dilliension	Min	Nom	Max	Min	Nom	Max
Α	4.80	5.00	5.20	0.189	0.197	0.205
В	4.80	5.00	5.20	0.189	0.197	0.205
С	1.30	1.50	1.70	0.050	0.060	0.067
D	1.98	2.08	2.18	0.078	0.082	0.086
E	1.07	1.17	1.27	0.042	0.046	0.050
F	0.50	0.64	0.70	0.020	0.025	0.028
G	2.39	2.54	2.69	0.094	0.100	0.106
Н		1.27			0.050	
I		0.76			0.030	
J		1.55			0.061	
K		2.79			0.110	
L		0.76			0.030	
M		2.36			0.093	
N		1.55			0.061	
0		2.79			0.110	
Р		2.79			0.110	
Q		2.79			0.110	

Case Materials


Materials			
Solder Pad Plating	0.3 to 1.0 µm Gold over 1.27 to 8.89 µm Nickel		
Lid Plating	2.0 to 3.0 µm Nickel		
Body	Al ₂ O ₃ Ceramic		
Pb Free			

Electrical Connections

	Connection	Terminals		
Port 1	Input	2		
Port 2	Output	6		
	Ground	All others		
Dot indicates Pin 1				

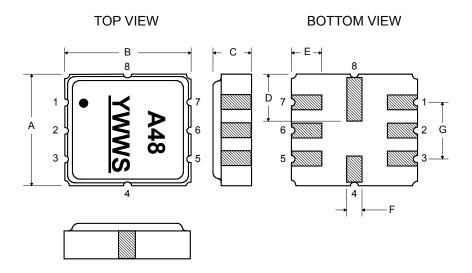

Tape and Reel Specifications

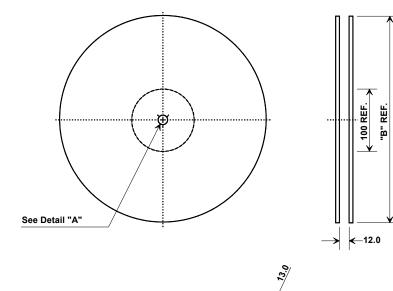

"B" Nominal Size		Quantity Per Reel	
Inches	millimeters		
7	178	500	
13	330	3000	



Carrier Tape Dimensions	
Ao	5.3 mm
Во	5.3 mm
Ko	2.0 mm
Pitch	8.0 mm
W	12.0 mm

