

FEATURES

- HIGH Q FOR RF APPLICATIONS
- STABLE NPO CHARACTERISTICS OVER TEMPERATURE AND VOLTAGE
- LOW LOSS COPPER (Cu) ELECTRODES
- HIGH VOLTAGE (UP TO 500VDC)
- EIA 0201, 0402, 0505, 0603, 0805 AND 1111 CASE SIZES
- IDEAL FOR WIRELESS DATA AND VOICE COMMUNICATIONS APPLICATIONS
WLANs, HIPERLAN, 802.11A, 802.11B, Wi-Fi, BLUETOOTH, TELEMATICS, PCS, LMDS AND CELLULAR



SPECIFICATIONS	NPO
Capacitance Range	0.1pF ~ 1000pF
Capacitance Tolerance	±0.05pF(A), ±0.1pF(B), ±0.25pF(C), ±0.5pF(D) ±1%(F), ±2%(G), ±5% (J)
Operating Temperature Range	-55°C ~ +125°C
Temperature Characteristics	0 ± 30PPM/°C
Rated Voltage	6.3Vdc, 10Vdc, 25Vdc, 50Vdc, 100Vdc, 250Vdc & 500Vdc
Q Factor (1MHz, 1.0Vrms, +25°C)	0201 C < 30pF Q ≥ 400+20xC 0402 (25V ~ 50V) C ≥ 30pF Q ≥ 1000 0402 (100V ~ 200V) C < 30pF Q ≥ 800+20xC 0603, 0505, 0805 & 1111 C ≥ 30pF Q ≥ 1400
Insulation Resistance	10,000 Megohms min. @ +25°C
Dielectric Withstanding Voltage	0201 ~ 0805: ≤100V x 2.5RV, ≥200V x 2RV for 1 ~ 5 sec. 1111: ≤100V x 2.5RV, <500V x 2RV, 500V x 1.5 for 1 ~ 5 sec.

Note: Reflow soldering allowed for all case sizes. Contact NIC for wave soldering restrictions.


RoHS Compliant

Includes all homogeneous materials

*See Part Number System for Details

DIMENSIONS (mm)

EIA Case Size	0201	0402	0505	0603	0805	1111
Length (L)	0.6 ± 0.03	1.0 ± 0.05	1.40 +0.38/-0.25	1.6 ± 0.10	2.0 ± 0.20	2.79 +0.51/-0.25
Width (W)	0.3 ± 0.03	0.5 ± 0.05	1.40 ± 0.38	0.8 ± 0.10	1.25 ± 0.20	2.79 ± 0.38
Thickness (T)	0.33 max.	0.55 max.	1.30 max.	0.87 max.	0.70 max. (0.2pF) 0.95 max.	1.78 max.
Termination Width (P)	0.10 ~ 0.20	0.15 ~ 0.30	0.12 ~ 0.50	0.25 ~ 0.55	0.30 ~ 0.70	0.13 ~ 0.63

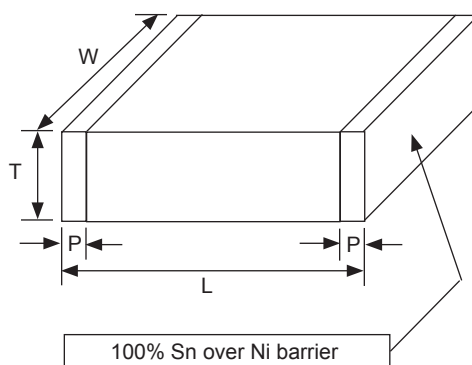

PART NUMBER SYSTEM

NMC-Q 0603 NPO 100 J 50 TRP E

- Series
- Size Code (see chart)
- Temperature Characteristic
- Capacitance Code, expressed in pF, first 2 digits are significant, 3rd digit is no. of zeros, "R" indicates decimal for under 10pF
- Capacitance Tolerance Code (see chart)
- Voltage (Vdc)
- TRP = Punched carrier, TRPLP = Embossed Plastic
- RoHS Compliant

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 6.3 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO0R1_6.3TRPF	0.1	B	400	2.2
NMC-Q0201NPO0R2_6.3TRPF	0.2	A, B	400	1.8
NMC-Q0201NPO0R3_6.3TRPF	0.3	A, B	400	0.95
NMC-Q0201NPO0R4_6.3TRPF	0.4	A, B	400	0.75
NMC-Q0201NPO0R5_6.3TRPF	0.5	A, B, C	400	0.50
NMC-Q0201NPO0R6_6.3TRPF	0.6	A, B, C	400	0.45
NMC-Q0201NPO0R7_6.3TRPF	0.7	A, B, C	400	0.40
NMC-Q0201NPO0R8_6.3TRPF	0.8	A, B, C	400	0.40
NMC-Q0201NPO0R9_6.3TRPF	0.9	A, B, C	400	0.35
NMC-Q0201NPO1R0_6.3TRPF	1.0	A, B, C	400	0.35
NMC-Q0201NPO1R1_6.3TRPF	1.1	A, B, C	400	0.35
NMC-Q0201NPO1R2_6.3TRPF	1.2	A, B, C	400	0.35
NMC-Q0201NPO1R3_6.3TRPF	1.3	A, B, C	400	0.35
NMC-Q0201NPO1R4_6.3TRPF	1.4	A, B, C	400	0.35
NMC-Q0201NPO1R5_6.3TRPF	1.5	A, B, C	400	0.30
NMC-Q0201NPO1R6_6.3TRPF	1.6	A, B, C	400	0.30
NMC-Q0201NPO1R7_6.3TRPF	1.7	A, B, C	400	0.30
NMC-Q0201NPO1R8_6.3TRPF	1.8	A, B, C	400	0.30
NMC-Q0201NPO1R9_6.3TRPF	1.9	A, B, C	400	0.30
NMC-Q0201NPO2R0_6.3TRPF	2.0	A, B, C	400	0.30
NMC-Q0201NPO2R1_6.3TRPF	2.1	A, B, C	400	0.30
NMC-Q0201NPO2R2_6.3TRPF	2.2	A, B, C	400	0.25
NMC-Q0201NPO2R3_6.3TRPF	2.3	A, B, C	400	0.25
NMC-Q0201NPO2R4_6.3TRPF	2.4	A, B, C	400	0.25
NMC-Q0201NPO2R5_6.3TRPF	2.5	A, B, C	400	0.25
NMC-Q0201NPO2R6_6.3TRPF	2.6	A, B, C	400	0.25
NMC-Q0201NPO2R7_6.3TRPF	2.7	A, B, C	400	0.25
NMC-Q0201NPO2R8_6.3TRPF	2.8	A, B, C	400	0.25
NMC-Q0201NPO2R9_6.3TRPF	2.9	A, B, C	400	0.25
NMC-Q0201NPO3R0_6.3TRPF	3.0	A, B, C	400	0.25
NMC-Q0201NPO3R1_6.3TRPF	3.1	A, B, C	400	0.25
NMC-Q0201NPO3R2_6.3TRPF	3.2	A, B, C	400	0.25
NMC-Q0201NPO3R3_6.3TRPF	3.3	A, B, C	400	0.25
NMC-Q0201NPO3R4_6.3TRPF	3.4	A, B, C	400	0.25
NMC-Q0201NPO3R5_6.3TRPF	3.5	A, B, C	400	0.25
NMC-Q0201NPO3R6_6.3TRPF	3.6	A, B, C	400	0.25
NMC-Q0201NPO3R7_6.3TRPF	3.7	A, B, C	400	0.25
NMC-Q0201NPO3R8_6.3TRPF	3.8	A, B, C	400	0.25
NMC-Q0201NPO3R9_6.3TRPF	3.9	A, B, C	400	0.20
NMC-Q0201NPO4R0_6.3TRPF	4.0	A, B, C	400	0.20
NMC-Q0201NPO4R1_6.3TRPF	4.1	A, B, C	400	0.20
NMC-Q0201NPO4R2_6.3TRPF	4.2	A, B, C	400	0.20
NMC-Q0201NPO4R3_6.3TRPF	4.3	A, B, C	400	0.20
NMC-Q0201NPO4R4_6.3TRPF	4.4	A, B, C	400	0.20
NMC-Q0201NPO4R5_6.3TRPF	4.5	A, B, C	400	0.20
NMC-Q0201NPO4R6_6.3TRPF	4.6	A, B, C	400	0.20
NMC-Q0201NPO4R7_6.3TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R7_6.3TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R8_6.3TRPF	4.8	A, B, C	400	0.20
NMC-Q0201NPO4R9_6.3TRPF	4.9	A, B, C	400	0.20
NMC-Q0201NPO5R1_6.3TRPF	5.1	A, B, C	400	0.20

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 2
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 6.3 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO5R2_6.3TRPF	5.2	A, B, C	400	0.20
NMC-Q0201NPO5R3_6.3TRPF	5.3	A, B, C	400	0.20
NMC-Q0201NPO5R4_6.3TRPF	5.4	A, B, C	400	0.20
NMC-Q0201NPO5R6_6.3TRPF	5.6	B, C, D	350	0.15
NMC-Q0201NPO5R7_6.3TRPF	5.7	B, C, D	350	0.15
NMC-Q0201NPO5R9_6.3TRPF	5.9	B, C, D	350	0.15
NMC-Q0201NPO6R0_6.3TRPF	6.0	B, C, D	350	0.15
NMC-Q0201NPO6R1_6.3TRPF	6.1	B, C, D	350	0.15
NMC-Q0201NPO6R2_6.3TRPF	6.2	B, C, D	350	0.15
NMC-Q0201NPO6R3_6.3TRPF	6.3	B, C, D	350	0.15
NMC-Q0201NPO6R4_6.3TRPF	6.4	B, C, D	350	0.15
NMC-Q0201NPO6R6_6.3TRPF	6.6	B, C, D	350	0.15
NMC-Q0201NPO6R8_6.3TRPF	6.8	B, C, D	350	0.15
NMC-Q0201NPO6R9_6.3TRPF	6.9	B, C, D	350	0.15
NMC-Q0201NPO7R0_6.3TRPF	7.0	B, C, D	350	0.15
NMC-Q0201NPO7R1_6.3TRPF	7.1	B, C, D	350	0.15
NMC-Q0201NPO7R2_6.3TRPF	7.2	B, C, D	350	0.15
NMC-Q0201NPO7R3_6.3TRPF	7.3	B, C, D	350	0.15
NMC-Q0201NPO7R4_6.3TRPF	7.4	B, C, D	350	0.15
NMC-Q0201NPO7R5_6.3TRPF	7.5	B, C, D	350	0.15
NMC-Q0201NPO7R6_6.3TRPF	7.6	B, C, D	350	0.15
NMC-Q0201NPO7R7_6.3TRPF	7.7	B, C, D	350	0.15
NMC-Q0201NPO7R8_6.3TRPF	7.8	B, C, D	350	0.15
NMC-Q0201NPO8R0_6.3TRPF	8.0	B, C, D	350	0.15
NMC-Q0201NPO8R1_6.3TRPF	8.1	B, C, D	300	0.15
NMC-Q0201NPO8R2_6.3TRPF	8.2	B, C, D	300	0.15
NMC-Q0201NPO8R3_6.3TRPF	8.3	B, C, D	300	0.15
NMC-Q0201NPO8R4_6.3TRPF	8.4	B, C, D	300	0.15
NMC-Q0201NPO8R5_6.3TRPF	8.5	B, C, D	300	0.15
NMC-Q0201NPO8R6_6.3TRPF	8.6	B, C, D	300	0.15
NMC-Q0201NPO8R7_6.3TRPF	8.7	B, C, D	300	0.15
NMC-Q0201NPO8R8_6.3TRPF	8.8	B, C, D	300	0.15
NMC-Q0201NPO8R9_6.3TRPF	8.9	B, C, D	300	0.15
NMC-Q0201NPO9R0_6.3TRPF	9.0	B, C, D	300	0.15
NMC-Q0201NPO9R1_6.3TRPF	9.1	B, C, D	300	0.15
NMC-Q0201NPO9R2_6.3TRPF	9.2	B, C, D	300	0.15
NMC-Q0201NPO9R3_6.3TRPF	9.3	B, C, D	300	0.15
NMC-Q0201NPO9R4_6.3TRPF	9.4	B, C, D	300	0.15
NMC-Q0201NPO9R5_6.3TRPF	9.5	B, C, D	300	0.15
NMC-Q0201NPO9R6_6.3TRPF	9.6	B, C, D	300	0.15
NMC-Q0201NPO9R7_6.3TRPF	9.7	B, C, D	300	0.15
NMC-Q0201NPO9R8_6.3TRPF	9.8	B, C, D	300	0.15
NMC-Q0201NPO9R9_6.3TRPF	9.9	B, C, D	300	0.15
NMC-Q0201NPO100_6.3TRPF	10	F, G, J	300	0.10
NMC-Q0201NPO110_6.3TRPF	11	F, G, J	300	0.10
NMC-Q0201NPO120_6.3TRPF	12	F, G, J	300	0.10
NMC-Q0201NPO130_6.3TRPF	13	F, G, J	300	0.10
NMC-Q0201NPO150_6.3TRPF	15	F, G, J	250	0.10
NMC-Q0201NPO160_6.3TRPF	16	F, G, J	300	0.10
NMC-Q0201NPO180_6.3TRPF	18	F, G, J	250	0.10
NMC-Q0201NPO200_6.3TRPF	20	F, G, J	250	0.10
NMC-Q0201NPO220_6.3TRPF	22	F, G, J	250	0.10

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 3
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 6.3 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO240_6.3TRPF	24	F, G, J	250	0.10
NMC-Q0201NPO270_6.3TRPF	27	F, G, J	250	0.10
NMC-Q0201NPO300_6.3TRPF	30	F, G, J	250	0.10
NMC-Q0201NPO330_6.3TRPF	33	F, G, J	250	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 10 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO0R1_10TRPF	0.1	B	400	2.2
NMC-Q0201NPO0R2_10TRPF	0.2	A, B	400	1.8
NMC-Q0201NPO0R3_10TRPF	0.3	A, B	400	0.95
NMC-Q0201NPO0R4_10TRPF	0.4	A, B	400	0.75
NMC-Q0201NPO0R5_10TRPF	0.5	A, B, C	400	0.50
NMC-Q0201NPO0R6_10TRPF	0.6	A, B, C	400	0.45
NMC-Q0201NPO0R7_10TRPF	0.7	A, B, C	400	0.40
NMC-Q0201NPO0R8_10TRPF	0.8	A, B, C	400	0.40
NMC-Q0201NPO0R9_10TRPF	0.9	A, B, C	400	0.35
NMC-Q0201NPO1R0_10TRPF	1.0	A, B, C	400	0.35
NMC-Q0201NPO1R1_10TRPF	1.1	A, B, C	400	0.35
NMC-Q0201NPO1R2_10TRPF	1.2	A, B, C	400	0.35
NMC-Q0201NPO1R3_10TRPF	1.3	A, B, C	400	0.35
NMC-Q0201NPO1R4_10TRPF	1.4	A, B, C	400	0.35
NMC-Q0201NPO1R5_10TRPF	1.5	A, B, C	400	0.30
NMC-Q0201NPO1R6_10TRPF	1.6	A, B, C	400	0.30
NMC-Q0201NPO1R7_10TRPF	1.7	A, B, C	400	0.30
NMC-Q0201NPO1R8_10TRPF	1.8	A, B, C	400	0.30
NMC-Q0201NPO1R9_10TRPF	1.9	A, B, C	400	0.30
NMC-Q0201NPO2R0_10TRPF	2.0	A, B, C	400	0.30
NMC-Q0201NPO2R1_10TRPF	2.1	A, B, C	400	0.30
NMC-Q0201NPO2R2_10TRPF	2.2	A, B, C	400	0.25
NMC-Q0201NPO2R3_10TRPF	2.3	A, B, C	400	0.25
NMC-Q0201NPO2R4_10TRPF	2.4	A, B, C	400	0.25
NMC-Q0201NPO2R5_10TRPF	2.5	A, B, C	400	0.25
NMC-Q0201NPO2R6_10TRPF	2.6	A, B, C	400	0.25
NMC-Q0201NPO2R7_10TRPF	2.7	A, B, C	400	0.25
NMC-Q0201NPO2R8_10TRPF	2.8	A, B, C	400	0.25
NMC-Q0201NPO2R9_10TRPF	2.9	A, B, C	400	0.25
NMC-Q0201NPO3R0_10TRPF	3.0	A, B, C	400	0.25
NMC-Q0201NPO3R1_10TRPF	3.1	A, B, C	400	0.25
NMC-Q0201NPO3R2_10TRPF	3.2	A, B, C	400	0.25
NMC-Q0201NPO3R3_10TRPF	3.3	A, B, C	400	0.25
NMC-Q0201NPO3R4_10TRPF	3.4	A, B, C	400	0.25
NMC-Q0201NPO3R5_10TRPF	3.5	A, B, C	400	0.25
NMC-Q0201NPO3R6_10TRPF	3.6	A, B, C	400	0.25
NMC-Q0201NPO3R7_10TRPF	3.7	A, B, C	400	0.25
NMC-Q0201NPO3R8_10TRPF	3.8	A, B, C	400	0.25
NMC-Q0201NPO3R9_10TRPF	3.9	A, B, C	400	0.20
NMC-Q0201NPO4R0_10TRPF	4.0	A, B, C	400	0.20
NMC-Q0201NPO4R1_10TRPF	4.1	A, B, C	400	0.20
NMC-Q0201NPO4R2_10TRPF	4.2	A, B, C	400	0.20
NMC-Q0201NPO4R3_10TRPF	4.3	A, B, C	400	0.20
NMC-Q0201NPO4R4_10TRPF	4.4	A, B, C	400	0.20
NMC-Q0201NPO4R5_10TRPF	4.5	A, B, C	400	0.20
NMC-Q0201NPO4R6_10TRPF	4.6	A, B, C	400	0.20
NMC-Q0201NPO4R7_10TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R7_10TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R8_10TRPF	4.8	A, B, C	400	0.20
NMC-Q0201NPO4R9_10TRPF	4.9	A, B, C	400	0.20
NMC-Q0201NPO5R1_10TRPF	5.1	A, B, C	400	0.20

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 5
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 10 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO5R2_10TRPF	5.2	A, B, C	400	0.20
NMC-Q0201NPO5R3_10TRPF	5.3	A, B, C	400	0.20
NMC-Q0201NPO5R4_10TRPF	5.4	A, B, C	400	0.20
NMC-Q0201NPO5R6_10TRPF	5.6	B, C, D	350	0.15
NMC-Q0201NPO5R7_10TRPF	5.7	B, C, D	350	0.15
NMC-Q0201NPO5R9_10TRPF	5.9	B, C, D	350	0.15
NMC-Q0201NPO6R0_10TRPF	6.0	B, C, D	350	0.15
NMC-Q0201NPO6R1_10TRPF	6.1	B, C, D	350	0.15
NMC-Q0201NPO6R2_10TRPF	6.2	B, C, D	350	0.15
NMC-Q0201NPO6R3_10TRPF	6.3	B, C, D	350	0.15
NMC-Q0201NPO6R4_10TRPF	6.4	B, C, D	350	0.15
NMC-Q0201NPO6R6_10TRPF	6.6	B, C, D	350	0.15
NMC-Q0201NPO6R8_10TRPF	6.8	B, C, D	350	0.15
NMC-Q0201NPO6R9_10TRPF	6.9	B, C, D	350	0.15
NMC-Q0201NPO7R0_10TRPF	7.0	B, C, D	350	0.15
NMC-Q0201NPO7R1_10TRPF	7.1	B, C, D	350	0.15
NMC-Q0201NPO7R2_10TRPF	7.2	B, C, D	350	0.15
NMC-Q0201NPO7R3_10TRPF	7.3	B, C, D	350	0.15
NMC-Q0201NPO7R4_10TRPF	7.4	B, C, D	350	0.15
NMC-Q0201NPO7R5_10TRPF	7.5	B, C, D	350	0.15
NMC-Q0201NPO7R6_10TRPF	7.6	B, C, D	350	0.15
NMC-Q0201NPO7R7_10TRPF	7.7	B, C, D	350	0.15
NMC-Q0201NPO7R8_10TRPF	7.8	B, C, D	350	0.15
NMC-Q0201NPO8R0_10TRPF	8.0	B, C, D	350	0.15
NMC-Q0201NPO8R1_10TRPF	8.1	B, C, D	300	0.15
NMC-Q0201NPO8R2_10TRPF	8.2	B, C, D	300	0.15
NMC-Q0201NPO8R3_10TRPF	8.3	B, C, D	300	0.15
NMC-Q0201NPO8R4_10TRPF	8.4	B, C, D	300	0.15
NMC-Q0201NPO8R5_10TRPF	8.5	B, C, D	300	0.15
NMC-Q0201NPO8R6_10TRPF	8.6	B, C, D	300	0.15
NMC-Q0201NPO8R7_10TRPF	8.7	B, C, D	300	0.15
NMC-Q0201NPO8R8_10TRPF	8.8	B, C, D	300	0.15
NMC-Q0201NPO8R9_10TRPF	8.9	B, C, D	300	0.15
NMC-Q0201NPO9R0_10TRPF	9.0	B, C, D	300	0.15
NMC-Q0201NPO9R1_10TRPF	9.1	B, C, D	300	0.15
NMC-Q0201NPO9R2_10TRPF	9.2	B, C, D	300	0.15
NMC-Q0201NPO9R3_10TRPF	9.3	B, C, D	300	0.15
NMC-Q0201NPO9R4_10TRPF	9.4	B, C, D	300	0.15
NMC-Q0201NPO9R5_10TRPF	9.5	B, C, D	300	0.15
NMC-Q0201NPO9R6_10TRPF	9.6	B, C, D	300	0.15
NMC-Q0201NPO9R7_10TRPF	9.7	B, C, D	300	0.15
NMC-Q0201NPO9R8_10TRPF	9.8	B, C, D	300	0.15
NMC-Q0201NPO9R9_10TRPF	9.9	B, C, D	300	0.15
NMC-Q0201NPO100_10TRPF	10	F, G, J	300	0.10
NMC-Q0201NPO110_10TRPF	11	F, G, J	300	0.10
NMC-Q0201NPO120_10TRPF	12	F, G, J	300	0.10
NMC-Q0201NPO130_10TRPF	13	F, G, J	300	0.10
NMC-Q0201NPO150_10TRPF	15	F, G, J	250	0.10
NMC-Q0201NPO160_10TRPF	16	F, G, J	300	0.10
NMC-Q0201NPO180_10TRPF	18	F, G, J	250	0.10
NMC-Q0201NPO200_10TRPF	20	F, G, J	250	0.10
NMC-Q0201NPO220_10TRPF	22	F, G, J	250	0.10

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 6
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 10 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO240_10TRPF	24	F, G, J	250	0.10
NMC-Q0201NPO270_10TRPF	27	F, G, J	250	0.10
NMC-Q0201NPO300_10TRPF	30	F, G, J	250	0.10
NMC-Q0201NPO330_10TRPF	33	F, G, J	250	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 25 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO0R1_25TRPF	0.1	B	400	2.2
NMC-Q0201NPO0R2_25TRPF	0.2	A, B	400	1.8
NMC-Q0201NPO0R3_25TRPF	0.3	A, B	400	0.95
NMC-Q0201NPO0R4_25TRPF	0.4	A, B	400	0.75
NMC-Q0201NPO0R5_25TRPF	0.5	A, B, C	400	0.50
NMC-Q0201NPO0R6_25TRPF	0.6	A, B, C	400	0.45
NMC-Q0201NPO0R7_25TRPF	0.7	A, B, C	400	0.40
NMC-Q0201NPO0R8_25TRPF	0.8	A, B, C	400	0.40
NMC-Q0201NPO0R9_25TRPF	0.9	A, B, C	400	0.35
NMC-Q0201NPO1R0_25TRPF	1.0	A, B, C	400	0.35
NMC-Q0201NPO1R1_25TRPF	1.1	A, B, C	400	0.35
NMC-Q0201NPO1R2_25TRPF	1.2	A, B, C	400	0.35
NMC-Q0201NPO1R3_25TRPF	1.3	A, B, C	400	0.35
NMC-Q0201NPO1R4_25TRPF	1.4	A, B, C	400	0.35
NMC-Q0201NPO1R5_25TRPF	1.5	A, B, C	400	0.30
NMC-Q0201NPO1R6_25TRPF	1.6	A, B, C	400	0.30
NMC-Q0201NPO1R7_25TRPF	1.7	A, B, C	400	0.30
NMC-Q0201NPO1R8_25TRPF	1.8	A, B, C	400	0.30
NMC-Q0201NPO1R9_25TRPF	1.9	A, B, C	400	0.30
NMC-Q0201NPO2R0_25TRPF	2.0	A, B, C	400	0.30
NMC-Q0201NPO2R1_25TRPF	2.1	A, B, C	400	0.30
NMC-Q0201NPO2R2_25TRPF	2.2	A, B, C	400	0.25
NMC-Q0201NPO2R3_25TRPF	2.3	A, B, C	400	0.25
NMC-Q0201NPO2R4_25TRPF	2.4	A, B, C	400	0.25
NMC-Q0201NPO2R5_25TRPF	2.5	A, B, C	400	0.25
NMC-Q0201NPO2R6_25TRPF	2.6	A, B, C	400	0.25
NMC-Q0201NPO2R7_25TRPF	2.7	A, B, C	400	0.25
NMC-Q0201NPO2R8_25TRPF	2.8	A, B, C	400	0.25
NMC-Q0201NPO2R9_25TRPF	2.9	A, B, C	400	0.25
NMC-Q0201NPO3R0_25TRPF	3.0	A, B, C	400	0.25
NMC-Q0201NPO3R1_25TRPF	3.1	A, B, C	400	0.25
NMC-Q0201NPO3R2_25TRPF	3.2	A, B, C	400	0.25
NMC-Q0201NPO3R3_25TRPF	3.3	A, B, C	400	0.25
NMC-Q0201NPO3R4_25TRPF	3.4	A, B, C	400	0.25
NMC-Q0201NPO3R5_25TRPF	3.5	A, B, C	400	0.25
NMC-Q0201NPO3R6_25TRPF	3.6	A, B, C	400	0.25
NMC-Q0201NPO3R7_25TRPF	3.7	A, B, C	400	0.25
NMC-Q0201NPO3R8_25TRPF	3.8	A, B, C	400	0.25
NMC-Q0201NPO3R9_25TRPF	3.9	A, B, C	400	0.20
NMC-Q0201NPO4R0_25TRPF	4.0	A, B, C	400	0.20
NMC-Q0201NPO4R1_25TRPF	4.1	A, B, C	400	0.20
NMC-Q0201NPO4R2_25TRPF	4.2	A, B, C	400	0.20
NMC-Q0201NPO4R3_25TRPF	4.3	A, B, C	400	0.20
NMC-Q0201NPO4R4_25TRPF	4.4	A, B, C	400	0.20
NMC-Q0201NPO4R5_25TRPF	4.5	A, B, C	400	0.20
NMC-Q0201NPO4R6_25TRPF	4.6	A, B, C	400	0.20
NMC-Q0201NPO4R7_25TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R7_25TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R8_25TRPF	4.8	A, B, C	400	0.20
NMC-Q0201NPO4R9_25TRPF	4.9	A, B, C	400	0.20
NMC-Q0201NPO5R1_25TRPF	5.1	A, B, C	400	0.20

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 8
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 25 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO5R2_25TRPF	5.2	A, B, C	400	0.20
NMC-Q0201NPO5R3_25TRPF	5.3	A, B, C	400	0.20
NMC-Q0201NPO5R4_25TRPF	5.4	A, B, C	400	0.20
NMC-Q0201NPO5R6_25TRPF	5.6	B, C, D	350	0.15
NMC-Q0201NPO5R7_25TRPF	5.7	B, C, D	350	0.15
NMC-Q0201NPO5R9_25TRPF	5.9	B, C, D	350	0.15
NMC-Q0201NPO6R0_25TRPF	6.0	B, C, D	350	0.15
NMC-Q0201NPO6R1_25TRPF	6.1	B, C, D	350	0.15
NMC-Q0201NPO6R2_25TRPF	6.2	B, C, D	350	0.15
NMC-Q0201NPO6R3_25TRPF	6.3	B, C, D	350	0.15
NMC-Q0201NPO6R4_25TRPF	6.4	B, C, D	350	0.15
NMC-Q0201NPO6R6_25TRPF	6.6	B, C, D	350	0.15
NMC-Q0201NPO6R8_25TRPF	6.8	B, C, D	350	0.15
NMC-Q0201NPO6R9_25TRPF	6.9	B, C, D	350	0.15
NMC-Q0201NPO7R0_25TRPF	7.0	B, C, D	350	0.15
NMC-Q0201NPO7R1_25TRPF	7.1	B, C, D	350	0.15
NMC-Q0201NPO7R2_25TRPF	7.2	B, C, D	350	0.15
NMC-Q0201NPO7R3_25TRPF	7.3	B, C, D	350	0.15
NMC-Q0201NPO7R4_25TRPF	7.4	B, C, D	350	0.15
NMC-Q0201NPO7R5_25TRPF	7.5	B, C, D	350	0.15
NMC-Q0201NPO7R6_25TRPF	7.6	B, C, D	350	0.15
NMC-Q0201NPO7R7_25TRPF	7.7	B, C, D	350	0.15
NMC-Q0201NPO7R8_25TRPF	7.8	B, C, D	350	0.15
NMC-Q0201NPO8R0_25TRPF	8.0	B, C, D	350	0.15
NMC-Q0201NPO8R1_25TRPF	8.1	B, C, D	300	0.15
NMC-Q0201NPO8R2_25TRPF	8.2	B, C, D	300	0.15
NMC-Q0201NPO8R3_25TRPF	8.3	B, C, D	300	0.15
NMC-Q0201NPO8R4_25TRPF	8.4	B, C, D	300	0.15
NMC-Q0201NPO8R5_25TRPF	8.5	B, C, D	300	0.15
NMC-Q0201NPO8R6_25TRPF	8.6	B, C, D	300	0.15
NMC-Q0201NPO8R7_25TRPF	8.7	B, C, D	300	0.15
NMC-Q0201NPO8R8_25TRPF	8.8	B, C, D	300	0.15
NMC-Q0201NPO8R9_25TRPF	8.9	B, C, D	300	0.15
NMC-Q0201NPO9R0_25TRPF	9.0	B, C, D	300	0.15
NMC-Q0201NPO9R1_25TRPF	9.1	B, C, D	300	0.15
NMC-Q0201NPO9R2_25TRPF	9.2	B, C, D	300	0.15
NMC-Q0201NPO9R3_25TRPF	9.3	B, C, D	300	0.15
NMC-Q0201NPO9R4_25TRPF	9.4	B, C, D	300	0.15
NMC-Q0201NPO9R5_25TRPF	9.5	B, C, D	300	0.15
NMC-Q0201NPO9R6_25TRPF	9.6	B, C, D	300	0.15
NMC-Q0201NPO9R7_25TRPF	9.7	B, C, D	300	0.15
NMC-Q0201NPO9R8_25TRPF	9.8	B, C, D	300	0.15
NMC-Q0201NPO9R9_25TRPF	9.9	B, C, D	300	0.15
NMC-Q0201NPO100_25TRPF	10	F, G, J	300	0.10
NMC-Q0201NPO110_25TRPF	11	F, G, J	300	0.10
NMC-Q0201NPO120_25TRPF	12	F, G, J	300	0.10
NMC-Q0201NPO130_25TRPF	13	F, G, J	300	0.10
NMC-Q0201NPO150_25TRPF	15	F, G, J	250	0.10
NMC-Q0201NPO160_25TRPF	16	F, G, J	300	0.10
NMC-Q0201NPO180_25TRPF	18	F, G, J	250	0.10
NMC-Q0201NPO200_25TRPF	20	F, G, J	250	0.10
NMC-Q0201NPO220_25TRPF	22	F, G, J	250	0.10

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 9
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 25 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO240_25TRPF	24	F, G, J	250	0.10
NMC-Q0201NPO270_25TRPF	27	F, G, J	250	0.10
NMC-Q0201NPO300_25TRPF	30	F, G, J	250	0.10
NMC-Q0201NPO330_25TRPF	33	F, G, J	250	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 50 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO0R1_50TRPF	0.1	B	400	2.2
NMC-Q0201NPO0R2_50TRPF	0.2	A, B	400	1.8
NMC-Q0201NPO0R3_50TRPF	0.3	A, B	400	0.95
NMC-Q0201NPO0R4_50TRPF	0.4	A, B	400	0.75
NMC-Q0201NPO0R5_50TRPF	0.5	A, B, C	400	0.50
NMC-Q0201NPO0R6_50TRPF	0.6	A, B, C	400	0.45
NMC-Q0201NPO0R7_50TRPF	0.7	A, B, C	400	0.40
NMC-Q0201NPO0R8_50TRPF	0.8	A, B, C	400	0.40
NMC-Q0201NPO0R9_50TRPF	0.9	A, B, C	400	0.35
NMC-Q0201NPO1R0_50TRPF	1.0	A, B, C	400	0.35
NMC-Q0201NPO1R1_50TRPF	1.1	A, B, C	400	0.35
NMC-Q0201NPO1R2_50TRPF	1.2	A, B, C	400	0.35
NMC-Q0201NPO1R3_50TRPF	1.3	A, B, C	400	0.35
NMC-Q0201NPO1R4_50TRPF	1.4	A, B, C	400	0.35
NMC-Q0201NPO1R5_50TRPF	1.5	A, B, C	400	0.30
NMC-Q0201NPO1R6_50TRPF	1.6	A, B, C	400	0.30
NMC-Q0201NPO1R7_50TRPF	1.7	A, B, C	400	0.30
NMC-Q0201NPO1R8_50TRPF	1.8	A, B, C	400	0.30
NMC-Q0201NPO1R9_50TRPF	1.9	A, B, C	400	0.30
NMC-Q0201NPO2R0_50TRPF	2.0	A, B, C	400	0.30
NMC-Q0201NPO2R1_50TRPF	2.1	A, B, C	400	0.30
NMC-Q0201NPO2R2_50TRPF	2.2	A, B, C	400	0.25
NMC-Q0201NPO2R3_50TRPF	2.3	A, B, C	400	0.25
NMC-Q0201NPO2R4_50TRPF	2.4	A, B, C	400	0.25
NMC-Q0201NPO2R5_50TRPF	2.5	A, B, C	400	0.25
NMC-Q0201NPO2R6_50TRPF	2.6	A, B, C	400	0.25
NMC-Q0201NPO2R7_50TRPF	2.7	A, B, C	400	0.25
NMC-Q0201NPO2R8_50TRPF	2.8	A, B, C	400	0.25
NMC-Q0201NPO2R9_50TRPF	2.9	A, B, C	400	0.25
NMC-Q0201NPO3R0_50TRPF	3.0	A, B, C	400	0.25
NMC-Q0201NPO3R1_50TRPF	3.1	A, B, C	400	0.25
NMC-Q0201NPO3R2_50TRPF	3.2	A, B, C	400	0.25
NMC-Q0201NPO3R3_50TRPF	3.3	A, B, C	400	0.25
NMC-Q0201NPO3R4_50TRPF	3.4	A, B, C	400	0.25
NMC-Q0201NPO3R5_50TRPF	3.5	A, B, C	400	0.25
NMC-Q0201NPO3R6_50TRPF	3.6	A, B, C	400	0.25
NMC-Q0201NPO3R7_50TRPF	3.7	A, B, C	400	0.25
NMC-Q0201NPO3R8_50TRPF	3.8	A, B, C	400	0.25
NMC-Q0201NPO3R9_50TRPF	3.9	A, B, C	400	0.20
NMC-Q0201NPO4R0_50TRPF	4.0	A, B, C	400	0.20
NMC-Q0201NPO4R1_50TRPF	4.1	A, B, C	400	0.20
NMC-Q0201NPO4R2_50TRPF	4.2	A, B, C	400	0.20
NMC-Q0201NPO4R3_50TRPF	4.3	A, B, C	400	0.20
NMC-Q0201NPO4R4_50TRPF	4.4	A, B, C	400	0.20
NMC-Q0201NPO4R5_50TRPF	4.5	A, B, C	400	0.20
NMC-Q0201NPO4R6_50TRPF	4.6	A, B, C	400	0.20
NMC-Q0201NPO4R7_50TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R7_50TRPF	4.7	A, B, C	400	0.20
NMC-Q0201NPO4R8_50TRPF	4.8	A, B, C	400	0.20
NMC-Q0201NPO4R9_50TRPF	4.9	A, B, C	400	0.20
NMC-Q0201NPO5R1_50TRPF	5.1	A, B, C	400	0.20

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 11
www.niccomp.com

Last Updated 6/23/2024. Specification subject to change without notice. Please check web site for latest information.

NMC-Q Series

Surface Mount Multilayer Capacitors



0201 50 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0201NPO5R2_50TRPF	5.2	A, B, C	400	0.20
NMC-Q0201NPO5R3_50TRPF	5.3	A, B, C	400	0.20
NMC-Q0201NPO5R4_50TRPF	5.4	A, B, C	400	0.20
NMC-Q0201NPO5R6_50TRPF	5.6	B, C, D	350	0.15
NMC-Q0201NPO5R7_50TRPF	5.7	B, C, D	350	0.15
NMC-Q0201NPO5R9_50TRPF	5.9	B, C, D	350	0.15
NMC-Q0201NPO6R0_50TRPF	6.0	B, C, D	350	0.15
NMC-Q0201NPO6R1_50TRPF	6.1	B, C, D	350	0.15
NMC-Q0201NPO6R2_50TRPF	6.2	B, C, D	350	0.15
NMC-Q0201NPO6R3_50TRPF	6.3	B, C, D	350	0.15
NMC-Q0201NPO6R4_50TRPF	6.4	B, C, D	350	0.15
NMC-Q0201NPO6R6_50TRPF	6.6	B, C, D	350	0.15
NMC-Q0201NPO6R8_50TRPF	6.8	B, C, D	350	0.15
NMC-Q0201NPO6R9_50TRPF	6.9	B, C, D	350	0.15
NMC-Q0201NPO7R0_50TRPF	7.0	B, C, D	350	0.15
NMC-Q0201NPO7R1_50TRPF	7.1	B, C, D	350	0.15
NMC-Q0201NPO7R2_50TRPF	7.2	B, C, D	350	0.15
NMC-Q0201NPO7R3_50TRPF	7.3	B, C, D	350	0.15
NMC-Q0201NPO7R4_50TRPF	7.4	B, C, D	350	0.15
NMC-Q0201NPO7R5_50TRPF	7.5	B, C, D	350	0.15
NMC-Q0201NPO7R6_50TRPF	7.6	B, C, D	350	0.15
NMC-Q0201NPO7R7_50TRPF	7.7	B, C, D	350	0.15
NMC-Q0201NPO7R8_50TRPF	7.8	B, C, D	350	0.15
NMC-Q0201NPO8R0_50TRPF	8.0	B, C, D	350	0.15
NMC-Q0201NPO8R1_50TRPF	8.1	B, C, D	300	0.15
NMC-Q0201NPO8R2_50TRPF	8.2	B, C, D	300	0.15
NMC-Q0201NPO8R3_50TRPF	8.3	B, C, D	300	0.15
NMC-Q0201NPO8R4_50TRPF	8.4	B, C, D	300	0.15
NMC-Q0201NPO8R5_50TRPF	8.5	B, C, D	300	0.15
NMC-Q0201NPO8R6_50TRPF	8.6	B, C, D	300	0.15
NMC-Q0201NPO8R7_50TRPF	8.7	B, C, D	300	0.15
NMC-Q0201NPO8R8_50TRPF	8.8	B, C, D	300	0.15
NMC-Q0201NPO8R9_50TRPF	8.9	B, C, D	300	0.15
NMC-Q0201NPO9R0_50TRPF	9.0	B, C, D	300	0.15
NMC-Q0201NPO9R1_50TRPF	9.1	B, C, D	300	0.15
NMC-Q0201NPO9R2_50TRPF	9.2	B, C, D	300	0.15
NMC-Q0201NPO9R3_50TRPF	9.3	B, C, D	300	0.15
NMC-Q0201NPO9R4_50TRPF	9.4	B, C, D	300	0.15
NMC-Q0201NPO9R5_50TRPF	9.5	B, C, D	300	0.15
NMC-Q0201NPO9R6_50TRPF	9.6	B, C, D	300	0.15
NMC-Q0201NPO9R7_50TRPF	9.7	B, C, D	300	0.15
NMC-Q0201NPO9R8_50TRPF	9.8	B, C, D	300	0.15
NMC-Q0201NPO9R9_50TRPF	9.9	B, C, D	300	0.15
NMC-Q0201NPO100_50TRPF	10	F, G, J	300	0.10
NMC-Q0201NPO110_50TRPF	11	F, G, J	300	0.10
NMC-Q0201NPO120_50TRPF	12	F, G, J	300	0.10
NMC-Q0201NPO130_50TRPF	13	F, G, J	300	0.10
NMC-Q0201NPO150_50TRPF	15	F, G, J	250	0.10
NMC-Q0201NPO160_50TRPF	16	F, G, J	300	0.10
NMC-Q0201NPO180_50TRPF	18	F, G, J	250	0.10
NMC-Q0201NPO200_50TRPF	20	F, G, J	250	0.10
NMC-Q0201NPO220_50TRPF	22	F, G, J	250	0.10

*Typical Q & ESR

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 12
www.niccomp.com

Downloaded from Arrow.com. Last Updated 6/23/2024. Specification subject to change without notice. Please check web site for latest information.

0402 25 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0402NPO0R1_25TRPF	0.1	B	400	2.50
NMC-Q0402NPO0R2_25TRPF	0.2	A, B	400	1.60
NMC-Q0402NPO0R3_25TRPF	0.3	A, B	400	1.10
NMC-Q0402NPO0R4_25TRPF	0.4	A, B	400	0.80
NMC-Q0402NPO0R5_25TRPF	0.5	A, B, C	400	0.50
NMC-Q0402NPO0R6_25TRPF	0.6	A, B, C	400	0.40
NMC-Q0402NPO0R7_25TRPF	0.7	A, B, C	400	0.30
NMC-Q0402NPO0R8_25TRPF	0.8	A, B, C	400	0.25
NMC-Q0402NPO0R9_25TRPF	0.9	A, B, C	400	0.20
NMC-Q0402NPO1R0_25TRPF	1.0	A, B, C	400	0.20
NMC-Q0402NPO1R2_25TRPF	1.2	A, B, C	400	0.20
NMC-Q0402NPO1R5_25TRPF	1.5	A, B, C	400	0.20
NMC-Q0402NPO1R6_25TRPF	1.6	A, B, C	400	0.20
NMC-Q0402NPO1R7_25TRPF	1.7	A, B, C	400	0.20
NMC-Q0402NPO1R8_25TRPF	1.8	A, B, C	400	0.20
NMC-Q0402NPO1R9_25TRPF	1.9	A, B, C	400	0.20
NMC-Q0402NPO2R0_25TRPF	2.0	A, B, C	400	0.20
NMC-Q0402NPO2R1_25TRPF	2.1	A, B, C	400	0.20
NMC-Q0402NPO2R2_25TRPF	2.2	A, B, C	400	0.20
NMC-Q0402NPO2R3_25TRPF	2.3	A, B, C	400	0.20
NMC-Q0402NPO2R4_25TRPF	2.4	A, B, C	400	0.20
NMC-Q0402NPO2R7_25TRPF	2.7	A, B, C	400	0.20
NMC-Q0402NPO3R3_25TRPF	3.3	A, B, C	400	0.15
NMC-Q0402NPO3R6_25TRPF	3.6	A, B, C	400	0.15
NMC-Q0402NPO3R9_25TRPF	3.9	A, B, C	350	0.15
NMC-Q0402NPO4R7_25TRPF	4.7	A, B, C	300	0.15
NMC-Q0402NPO5R1_25TRPF	5.1	B, C, D	300	0.15
NMC-Q0402NPO5R6_25TRPF	5.6	B, C, D	300	0.15
NMC-Q0402NPO6R8_25TRPF	6.8	B, C, D	250	0.15
NMC-Q0402NPO8R2_25TRPF	8.2	B, C, D	250	0.10
NMC-Q0402NPO100_25TRPF	10	F, G, J	250	0.10
NMC-Q0402NPO120_25TRPF	12	F, G, J	250	0.10
NMC-Q0402NPO150_25TRPF	15	F, G, J	250	0.10
NMC-Q0402NPO180_25TRPF	18	F, G, J	250	0.10
NMC-Q0402NPO220_25TRPF	22	F, G, J	250	0.10
NMC-Q0402NPO270_25TRPF	27	F, G, J	250	0.10
NMC-Q0402NPO300_25TRPF	30	F, G, J	250	0.10
NMC-Q0402NPO330_25TRPF	33	F, G, J	250	0.10
NMC-Q0402NPO390_25TRPF	39	F, G, J	150	0.10
NMC-Q0402NPO430_25TRPF	43	F, G, J	150	0.10
NMC-Q0402NPO470_25TRPF	47	F, G, J	30	0.10
NMC-Q0402NPO510_25TRPF	51	F, G, J	30	0.10
NMC-Q0402NPO560_25TRPF	56	F, G, J	30	0.10
NMC-Q0402NPO680_25TRPF	68	F, G, J	15	0.10
NMC-Q0402NPO820_25TRPF	82	F, G, J	15	0.10
NMC-Q0402NPO101_25TRPF	100	F, G, J	15	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0402 50 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0402NPO0R1_50TRPF	0.1	B	400	2.50
NMC-Q0402NPO0R2_50TRPF	0.2	A, B	400	1.60
NMC-Q0402NPO0R3_50TRPF	0.3	A, B	400	1.10
NMC-Q0402NPO0R4_50TRPF	0.4	A, B	400	0.80
NMC-Q0402NPO0R5_50TRPF	0.5	A, B, C	400	0.50
NMC-Q0402NPO0R6_50TRPF	0.6	A, B, C	400	0.40
NMC-Q0402NPO0R7_50TRPF	0.7	A, B, C	400	0.30
NMC-Q0402NPO0R8_50TRPF	0.8	A, B, C	400	0.25
NMC-Q0402NPO0R9_50TRPF	0.9	A, B, C	400	0.20
NMC-Q0402NPO1R0_50TRPF	1.0	A, B, C	400	0.20
NMC-Q0402NPO1R2_50TRPF	1.2	A, B, C	400	0.20
NMC-Q0402NPO1R5_50TRPF	1.5	A, B, C	400	0.20
NMC-Q0402NPO1R6_50TRPF	1.6	A, B, C	400	0.20
NMC-Q0402NPO1R7_50TRPF	1.7	A, B, C	400	0.20
NMC-Q0402NPO1R8_50TRPF	1.8	A, B, C	400	0.20
NMC-Q0402NPO1R9_50TRPF	1.9	A, B, C	400	0.20
NMC-Q0402NPO2R0_50TRPF	2.0	A, B, C	400	0.20
NMC-Q0402NPO2R1_50TRPF	2.1	A, B, C	400	0.20
NMC-Q0402NPO2R2_50TRPF	2.2	A, B, C	400	0.20
NMC-Q0402NPO2R3_50TRPF	2.3	A, B, C	400	0.20
NMC-Q0402NPO2R4_50TRPF	2.4	A, B, C	400	0.20
NMC-Q0402NPO2R7_50TRPF	2.7	A, B, C	400	0.20
NMC-Q0402NPO3R0_50TRPF	3.0	A, B, C	400	0.15
NMC-Q0402NPO3R3_50TRPF	3.3	A, B, C	400	0.15
NMC-Q0402NPO3R6_50TRPF	3.6	A, B, C	400	0.15
NMC-Q0402NPO3R9_50TRPF	3.9	A, B, C	350	0.15
NMC-Q0402NPO4R7_50TRPF	4.7	A, B, C	300	0.15
NMC-Q0402NPO5R1_50TRPF	5.1	B, C, D	300	0.15
NMC-Q0402NPO5R6_50TRPF	5.6	B, C, D	300	0.15
NMC-Q0402NPO6R8_50TRPF	6.8	B, C, D	250	0.15
NMC-Q0402NPO8R2_50TRPF	8.2	B, C, D	250	0.10
NMC-Q0402NPO100_50TRPF	10	F, G, J	250	0.10
NMC-Q0402NPO120_50TRPF	12	F, G, J	250	0.10
NMC-Q0402NPO150_50TRPF	15	F, G, J	250	0.10
NMC-Q0402NPO180_50TRPF	18	F, G, J	250	0.10
NMC-Q0402NPO220_50TRPF	22	F, G, J	250	0.10
NMC-Q0402NPO270_50TRPF	27	F, G, J	250	0.10
NMC-Q0402NPO300_50TRPF	30	F, G, J	250	0.10
NMC-Q0402NPO330_50TRPF	33	F, G, J	250	0.10
NMC-Q0402NPO390_50TRPF	39	F, G, J	150	0.10
NMC-Q0402NPO430_50TRPF	43	F, G, J	150	0.10
NMC-Q0402NPO470_50TRPF	47	F, G, J	30	0.10
NMC-Q0402NPO510_50TRPF	51	F, G, J	30	0.10
NMC-Q0402NPO560_50TRPF	56	F, G, J	30	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0402 100 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0402NPO0R1_100TRPF	0.1	B	400	2.50
NMC-Q0402NPO0R2_100TRPF	0.2	A, B	400	1.60
NMC-Q0402NPO0R3_100TRPF	0.3	A, B	400	1.10
NMC-Q0402NPO0R4_100TRPF	0.4	A, B	400	0.80
NMC-Q0402NPO0R5_100TRPF	0.5	A, B, C	400	0.50
NMC-Q0402NPO0R6_100TRPF	0.6	A, B, C	400	0.40
NMC-Q0402NPO0R7_100TRPF	0.7	A, B, C	400	0.30
NMC-Q0402NPO0R8_100TRPF	0.8	A, B, C	400	0.25
NMC-Q0402NPO0R9_100TRPF	0.9	A, B, C	400	0.20
NMC-Q0402NPO1R0_100TRPF	1.0	A, B, C	400	0.20
NMC-Q0402NPO1R2_100TRPF	1.2	A, B, C	400	0.20
NMC-Q0402NPO1R5_100TRPF	1.5	A, B, C	400	0.20
NMC-Q0402NPO1R6_100TRPF	1.6	A, B, C	400	0.20
NMC-Q0402NPO1R7_100TRPF	1.7	A, B, C	400	0.20
NMC-Q0402NPO1R8_100TRPF	1.8	A, B, C	400	0.20
NMC-Q0402NPO1R9_100TRPF	1.9	A, B, C	400	0.20
NMC-Q0402NPO2R0_100TRPF	2.0	A, B, C	400	0.20
NMC-Q0402NPO2R1_100TRPF	2.1	A, B, C	400	0.20
NMC-Q0402NPO2R2_100TRPF	2.2	A, B, C	400	0.20
NMC-Q0402NPO2R3_100TRPF	2.3	A, B, C	400	0.20
NMC-Q0402NPO2R4_100TRPF	2.4	A, B, C	400	0.20
NMC-Q0402NPO2R7_100TRPF	2.7	A, B, C	400	0.20
NMC-Q0402NPO3R0_100TRPF	3.0	A, B, C	400	0.15
NMC-Q0402NPO3R3_100TRPF	3.3	A, B, C	400	0.15
NMC-Q0402NPO3R6_100TRPF	3.6	A, B, C	400	0.15
NMC-Q0402NPO3R9_100TRPF	3.9	A, B, C	350	0.15
NMC-Q0402NPO4R7_100TRPF	4.7	A, B, C	300	0.15
NMC-Q0402NPO5R1_100TRPF	5.1	B, C, D	300	0.15
NMC-Q0402NPO5R6_100TRPF	5.6	B, C, D	300	0.15
NMC-Q0402NPO6R8_100TRPF	6.8	B, C, D	250	0.15
NMC-Q0402NPO8R2_100TRPF	8.2	B, C, D	250	0.10
NMC-Q0402NPO100_100TRPF	10	F, G, J	250	0.10
NMC-Q0402NPO120_100TRPF	12	F, G, J	250	0.10
NMC-Q0402NPO150_100TRPF	15	F, G, J	250	0.10
NMC-Q0402NPO180_100TRPF	18	F, G, J	250	0.10
NMC-Q0402NPO220_100TRPF	22	F, G, J	250	0.10
NMC-Q0402NPO270_100TRPF	27	F, G, J	250	0.10
NMC-Q0402NPO300_100TRPF	30	F, G, J	250	0.10
NMC-Q0402NPO330_100TRPF	33	F, G, J	250	0.10
NMC-Q0402NPO390_100TRPF	39	F, G, J	150	0.10
NMC-Q0402NPO430_100TRPF	43	F, G, J	150	0.10
NMC-Q0402NPO470_100TRPF	47	F, G, J	30	0.10
NMC-Q0402NPO510_100TRPF	51	F, G, J	30	0.10
NMC-Q0402NPO560_100TRPF	56	F, G, J	30	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0402 200 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0402NPO0R1_200TRPF	0.1	B	400	2.50
NMC-Q0402NPO0R2_200TRPF	0.2	A, B	400	1.60
NMC-Q0402NPO0R3_200TRPF	0.3	A, B	400	1.10
NMC-Q0402NPO0R4_200TRPF	0.4	A, B	400	0.80
NMC-Q0402NPO0R5_200TRPF	0.5	A, B, C	400	0.50
NMC-Q0402NPO0R6_200TRPF	0.6	A, B, C	400	0.40
NMC-Q0402NPO0R7_200TRPF	0.7	A, B, C	400	0.30
NMC-Q0402NPO0R8_200TRPF	0.8	A, B, C	400	0.25
NMC-Q0402NPO0R9_200TRPF	0.9	A, B, C	400	0.20
NMC-Q0402NPO1R0_200TRPF	1.0	A, B, C	400	0.20
NMC-Q0402NPO1R2_200TRPF	1.2	A, B, C	400	0.20
NMC-Q0402NPO1R5_200TRPF	1.5	A, B, C	400	0.20
NMC-Q0402NPO1R6_200TRPF	1.6	A, B, C	400	0.20
NMC-Q0402NPO1R7_200TRPF	1.7	A, B, C	400	0.20
NMC-Q0402NPO1R8_200TRPF	1.8	A, B, C	400	0.20
NMC-Q0402NPO1R9_200TRPF	1.9	A, B, C	400	0.20
NMC-Q0402NPO2R0_200TRPF	2.0	A, B, C	400	0.20
NMC-Q0402NPO2R1_200TRPF	2.1	A, B, C	400	0.20
NMC-Q0402NPO2R2_200TRPF	2.2	A, B, C	400	0.20
NMC-Q0402NPO2R3_200TRPF	2.3	A, B, C	400	0.20
NMC-Q0402NPO2R4_200TRPF	2.4	A, B, C	400	0.20
NMC-Q0402NPO2R7_200TRPF	2.7	A, B, C	400	0.20
NMC-Q0402NPO3R0_200TRPF	3.0	A, B, C	400	0.15
NMC-Q0402NPO3R3_200TRPF	3.3	A, B, C	400	0.15
NMC-Q0402NPO3R6_200TRPF	3.6	A, B, C	400	0.15
NMC-Q0402NPO3R9_200TRPF	3.9	A, B, C	350	0.15
NMC-Q0402NPO4R7_200TRPF	4.7	A, B, C	300	0.15
NMC-Q0402NPO5R1_200TRPF	5.1	B, C, D	300	0.15
NMC-Q0402NPO5R6_200TRPF	5.6	B, C, D	300	0.15
NMC-Q0402NPO6R8_200TRPF	6.8	B, C, D	250	0.15
NMC-Q0402NPO8R2_200TRPF	8.2	B, C, D	250	0.10
NMC-Q0402NPO100_200TRPF	10	F, G, J	250	0.10
NMC-Q0402NPO120_200TRPF	12	F, G, J	250	0.10
NMC-Q0402NPO150_200TRPF	15	F, G, J	250	0.10
NMC-Q0402NPO180_200TRPF	18	F, G, J	250	0.10
NMC-Q0402NPO220_200TRPF	22	F, G, J	250	0.10
NMC-Q0402NPO270_200TRPF	27	F, G, J	250	0.10
NMC-Q0402NPO300_200TRPF	30	F, G, J	250	0.10
NMC-Q0402NPO330_200TRPF	33	F, G, J	250	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0505 250 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0505NPO0R4_250TRPF	0.4	A, B, C	800	0.40
NMC-Q0505NPO0R5_250TRPF	0.5	A, B, C	800	0.40
NMC-Q0505NPO0R6_250TRPF	0.6	A, B, C	800	0.40
NMC-Q0505NPO0R7_250TRPF	0.7	A, B, C	700	0.30
NMC-Q0505NPO0R8_250TRPF	0.8	A, B, C	700	0.30
NMC-Q0505NPO0R9_250TRPF	0.9	A, B, C	700	0.30
NMC-Q0505NPO1R0_250TRPF	1.0	A, B, C	700	0.20
NMC-Q0505NPO1R2_250TRPF	1.2	A, B, C	700	0.20
NMC-Q0505NPO1R5_250TRPF	1.5	A, B, C	700	0.20
NMC-Q0505NPO1R8_250TRPF	1.8	A, B, C	700	0.10
NMC-Q0505NPO2R2_250TRPF	2.2	A, B, C	500	0.10
NMC-Q0505NPO2R7_250TRPF	2.7	A, B, C	500	0.10
NMC-Q0505NPO3R3_250TRPF	3.3	A, B, C	500	0.10
NMC-Q0505NPO3R9_250TRPF	3.9	A, B, C	500	0.10
NMC-Q0505NPO4R7_250TRPF	4.7	A, B, C	500	0.10
NMC-Q0505NPO5R6_250TRPF	5.6	B, C, D	400	0.10
NMC-Q0505NPO6R8_250TRPF	6.8	B, C, D	400	0.10
NMC-Q0505NPO8R2_250TRPF	8.2	B, C, D	300	0.10
NMC-Q0505NPO100_250TRPF	10	F, G, J	300	0.10
NMC-Q0505NPO120_250TRPF	12	F, G, J	300	0.10
NMC-Q0505NPO150_250TRPF	15	F, G, J	200	0.10
NMC-Q0505NPO180_250TRPF	18	F, G, J	200	0.10
NMC-Q0505NPO220_250TRPF	22	F, G, J	200	0.10
NMC-Q0505NPO270_250TRPF	27	F, G, J	200	0.10
NMC-Q0505NPO330_250TRPF	33	F, G, J	50	0.10
NMC-Q0505NPO390_250TRPF	39	F, G, J	50	0.10
NMC-Q0505NPO470_250TRPF	47	F, G, J	50	0.10
NMC-Q0505NPO560_250TRPF	56	F, G, J	30	0.10
NMC-Q0505NPO680_250TRPF	68	F, G, J	30	0.10
NMC-Q0505NPO820_250TRPF	82	F, G, J	10	0.10
NMC-Q0505NPO101_250TRPF	100	F, G, J	10	0.10

Contact NIC for values not shown.

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0603 50 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0603NPO0R3_50TRPF	0.3	B	400	0.90
NMC-Q0603NPO0R4_50TRPF	0.4	A, B	400	0.90
NMC-Q0603NPO0R45_50TRPF	0.45	A, B	400	0.90
NMC-Q0603NPO0R5_50TRPF	0.5	A, B, C	400	0.80
NMC-Q0603NPO0R6_50TRPF	0.6	A, B, C	400	0.70
NMC-Q0603NPO0R7_50TRPF	0.7	A, B, C	400	0.50
NMC-Q0603NPO0R8_50TRPF	0.8	A, B, C	400	0.50
NMC-Q0603NPO0R9_50TRPF	0.9	A, B, C	400	0.40
NMC-Q0603NPO1R0_50TRPF	1.0	A, B, C	400	0.30
NMC-Q0603NPO1R2_50TRPF	1.2	A, B, C	400	0.20
NMC-Q0603NPO1R5_50TRPF	1.5	A, B, C	400	0.20
NMC-Q0603NPO1R6_50TRPF	1.6	A, B, C	400	0.20
NMC-Q0603NPO1R8_50TRPF	1.8	A, B, C	400	0.20
NMC-Q0603NPO2R0_50TRPF	2.0	A, B, C	400	0.20
NMC-Q0603NPO2R2_50TRPF	2.2	A, B, C	400	0.20
NMC-Q0603NPO2R7_50TRPF	2.7	A, B, C	400	0.15
NMC-Q0603NPO3R3_50TRPF	3.3	A, B, C	350	0.15
NMC-Q0603NPO3R9_50TRPF	3.9	A, B, C	350	0.10
NMC-Q0603NPO4R3_50TRPF	4.3	A, B, C	300	0.10
NMC-Q0603NPO4R7_50TRPF	4.7	A, B, C	300	0.10
NMC-Q0603NPO5R6_50TRPF	5.6	B, C, D	300	0.10
NMC-Q0603NPO6R8_50TRPF	6.8	B, C, D	250	0.10
NMC-Q0603NPO8R2_50TRPF	8.2	B, C, D	200	0.10
NMC-Q0603NPO100_50TRPF	10	F, G, J	150	0.10
NMC-Q0603NPO120_50TRPF	12	F, G, J	100	0.10
NMC-Q0603NPO150_50TRPF	15	F, G, J	100	0.10
NMC-Q0603NPO180_50TRPF	18	F, G, J	100	0.10
NMC-Q0603NPO220_50TRPF	22	F, G, J	100	0.10
NMC-Q0603NPO270_50TRPF	27	F, G, J	75	0.10
NMC-Q0603NPO330_50TRPF	33	F, G, J	60	0.10
NMC-Q0603NPO390_50TRPF	39	F, G, J	40	0.10
NMC-Q0603NPO430_50TRPF	43	F, G, J	25	0.10
NMC-Q0603NPO470_50TRPF	47	F, G, J	25	0.10
NMC-Q0603NPO560_50TRPF	56	F, G, J	10	0.10
NMC-Q0603NPO680_50TRPF	68	F, G, J	3	0.10
NMC-Q0603NPO820_50TRPF	82	F, G, J	3	0.10
NMC-Q0603NPO101_50TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

0603 100 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0603NPO0R3_100TRPF	0.3	B	400	0.90
NMC-Q0603NPO0R4_100TRPF	0.4	A, B	400	0.90
NMC-Q0603NPO0R5_100TRPF	0.5	A, B, C	400	0.80
NMC-Q0603NPO0R6_100TRPF	0.6	A, B, C	400	0.70
NMC-Q0603NPO0R7_100TRPF	0.7	A, B, C	400	0.50
NMC-Q0603NPO0R8_100TRPF	0.8	A, B, C	400	0.50
NMC-Q0603NPO0R9_100TRPF	0.9	A, B, C	400	0.40
NMC-Q0603NPO1R0_100TRPF	1.0	A, B, C	400	0.30
NMC-Q0603NPO1R2_100TRPF	1.2	A, B, C	400	0.20
NMC-Q0603NPO1R5_100TRPF	1.5	A, B, C	400	0.20
NMC-Q0603NPO1R8_100TRPF	1.8	A, B, C	400	0.20
NMC-Q0603NPO2R2_100TRPF	2.2	A, B, C	400	0.20
NMC-Q0603NPO2R7_100TRPF	2.7	A, B, C	400	0.15
NMC-Q0603NPO3R3_100TRPF	3.3	A, B, C	350	0.15
NMC-Q0603NPO3R9_100TRPF	3.9	A, B, C	350	0.10
NMC-Q0603NPO4R7_100TRPF	4.7	A, B, C	300	0.10
NMC-Q0603NPO5R6_100TRPF	5.6	B, C, D	300	0.10
NMC-Q0603NPO6R8_100TRPF	6.8	B, C, D	250	0.10
NMC-Q0603NPO8R2_100TRPF	8.2	B, C, D	200	0.10
NMC-Q0603NPO100_100TRPF	10	F, G, J	150	0.10
NMC-Q0603NPO120_100TRPF	12	F, G, J	100	0.10
NMC-Q0603NPO150_100TRPF	15	F, G, J	100	0.10
NMC-Q0603NPO180_100TRPF	18	F, G, J	100	0.10
NMC-Q0603NPO220_100TRPF	22	F, G, J	100	0.10
NMC-Q0603NPO270_100TRPF	27	F, G, J	75	0.10
NMC-Q0603NPO330_100TRPF	33	F, G, J	60	0.10
NMC-Q0603NPO390_100TRPF	39	F, G, J	40	0.10
NMC-Q0603NPO430_100TRPF	43	F, G, J	25	0.10
NMC-Q0603NPO470_100TRPF	47	F, G, J	25	0.10
NMC-Q0603NPO560_100TRPF	56	F, G, J	10	0.10
NMC-Q0603NPO680_100TRPF	68	F, G, J	3	0.10
NMC-Q0603NPO820_100TRPF	82	F, G, J	3	0.10
NMC-Q0603NPO101_100TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

0603 250 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (@ 1GHz)*
NMC-Q0603NPO0R3_250TRPF	0.3	B	400	0.90
NMC-Q0603NPO0R4_250TRPF	0.4	A, B	400	0.90
NMC-Q0603NPO0R5_250TRPF	0.5	A, B, C	400	0.80
NMC-Q0603NPO0R6_250TRPF	0.6	A, B, C	400	0.70
NMC-Q0603NPO0R7_250TRPF	0.7	A, B, C	400	0.50
NMC-Q0603NPO0R8_250TRPF	0.8	A, B, C	400	0.50
NMC-Q0603NPO0R9_250TRPF	0.9	A, B, C	400	0.40
NMC-Q0603NPO1R0_250TRPF	1.0	A, B, C	400	0.30
NMC-Q0603NPO1R2_250TRPF	1.2	A, B, C	400	0.20
NMC-Q0603NPO1R5_250TRPF	1.5	A, B, C	400	0.20
NMC-Q0603NPO1R8_250TRPF	1.8	A, B, C	400	0.20
NMC-Q0603NPO2R2_250TRPF	2.2	A, B, C	400	0.20
NMC-Q0603NPO2R7_250TRPF	2.7	A, B, C	400	0.15
NMC-Q0603NPO3R3_250TRPF	3.3	A, B, C	350	0.15
NMC-Q0603NPO3R9_250TRPF	3.9	A, B, C	350	0.10
NMC-Q0603NPO4R7_250TRPF	4.7	A, B, C	300	0.10
NMC-Q0603NPO5R6_250TRPF	5.6	B, C, D	300	0.10
NMC-Q0603NPO6R8_250TRPF	6.8	B, C, D	250	0.10
NMC-Q0603NPO8R2_250TRPF	8.2	B, C, D	200	0.10
NMC-Q0603NPO100_250TRPF	10	F, G, J	150	0.10
NMC-Q0603NPO120_250TRPF	12	F, G, J	100	0.10
NMC-Q0603NPO150_250TRPF	15	F, G, J	100	0.10
NMC-Q0603NPO180_250TRPF	18	F, G, J	100	0.10
NMC-Q0603NPO220_250TRPF	22	F, G, J	100	0.10
NMC-Q0603NPO270_250TRPF	27	F, G, J	75	0.10
NMC-Q0603NPO330_250TRPF	33	F, G, J	60	0.10
NMC-Q0603NPO390_250TRPF	39	F, G, J	40	0.10
NMC-Q0603NPO430_250TRPF	43	F, G, J	25	0.10
NMC-Q0603NPO470_250TRPF	47	F, G, J	25	0.10
NMC-Q0603NPO560_250TRPF	56	F, G, J	10	0.10
NMC-Q0603NPO680_250TRPF	68	F, G, J	3	0.10
NMC-Q0603NPO820_250TRPF	82	F, G, J	3	0.10
NMC-Q0603NPO101_250TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0805 50 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0805NPO0R2_50TRPF	0.2	B	400	0.90
NMC-Q0805NPO0R3_50TRPF	0.3	B	400	0.90
NMC-Q0805NPO0R4_50TRPF	0.4	A, B	400	0.90
NMC-Q0805NPO0R5_50TRPF	0.5	A, B, C	400	0.80
NMC-Q0805NPO0R6_50TRPF	0.6	A, B, C	400	0.70
NMC-Q0805NPO0R7_50TRPF	0.7	A, B, C	400	0.50
NMC-Q0805NPO0R8_50TRPF	0.8	A, B, C	400	0.50
NMC-Q0805NPO0R9_50TRPF	0.9	A, B, C	400	0.40
NMC-Q0805NPO1R0_50TRPF	1.0	A, B, C	400	0.30
NMC-Q0805NPO1R2_50TRPF	1.2	A, B, C	400	0.20
NMC-Q0805NPO1R5_50TRPF	1.5	A, B, C	400	0.20
NMC-Q0805NPO1R6_50TRPF	1.6	A, B, C	400	0.20
NMC-Q0805NPO1R8_50TRPF	1.8	A, B, C	400	0.20
NMC-Q0805NPO2R0_50TRPF	2.0	A, B, C	400	0.20
NMC-Q0805NPO2R2_50TRPF	2.2	A, B, C	400	0.20
NMC-Q0805NPO2R7_50TRPF	2.7	A, B, C	400	0.15
NMC-Q0805NPO3R3_50TRPF	3.3	A, B, C	350	0.15
NMC-Q0805NPO3R9_50TRPF	3.9	A, B, C	350	0.10
NMC-Q0805NPO4R3_50TRPF	4.3	A, B, C	300	0.10
NMC-Q0805NPO4R7_50TRPF	4.7	A, B, C	300	0.10
NMC-Q0805NPO5R6_50TRPF	5.6	B, C, D	300	0.10
NMC-Q0805NPO6R8_50TRPF	6.8	B, C, D	250	0.10
NMC-Q0805NPO8R2_50TRPF	8.2	B, C, D	200	0.10
NMC-Q0805NPO100_50TRPF	10	F, G, J	150	0.10
NMC-Q0805NPO120_50TRPF	12	F, G, J	100	0.10
NMC-Q0805NPO150_50TRPF	15	F, G, J	100	0.10
NMC-Q0805NPO180_50TRPF	18	F, G, J	100	0.10
NMC-Q0805NPO220_50TRPF	22	F, G, J	100	0.10
NMC-Q0805NPO270_50TRPF	27	F, G, J	75	0.10
NMC-Q0805NPO330_50TRPF	33	F, G, J	60	0.10
NMC-Q0805NPO390_50TRPF	39	F, G, J	40	0.10
NMC-Q0805NPO430_50TRPF	43	F, G, J	25	0.10
NMC-Q0805NPO470_50TRPF	47	F, G, J	25	0.10
NMC-Q0805NPO560_50TRPF	56	F, G, J	10	0.10
NMC-Q0805NPO680_50TRPF	68	F, G, J	3	0.10
NMC-Q0805NPO820_50TRPF	82	F, G, J	3	0.10
NMC-Q0805NPO910_50TRPF	91	F, G, J	3	0.10
NMC-Q0805NPO101_50TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0805 100 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0805NPO0R2_100TRPF	0.2	B	400	0.90
NMC-Q0805NPO0R3_100TRPF	0.3	B	400	0.90
NMC-Q0805NPO0R4_100TRPF	0.4	A, B	400	0.90
NMC-Q0805NPO0R5_100TRPF	0.5	A, B, C	400	0.80
NMC-Q0805NPO0R6_100TRPF	0.6	A, B, C	400	0.70
NMC-Q0805NPO0R7_100TRPF	0.7	A, B, C	400	0.50
NMC-Q0805NPO0R8_100TRPF	0.8	A, B, C	400	0.50
NMC-Q0805NPO0R9_100TRPF	0.9	A, B, C	400	0.40
NMC-Q0805NPO1R0_100TRPF	1.0	A, B, C	400	0.30
NMC-Q0805NPO1R2_100TRPF	1.2	A, B, C	400	0.20
NMC-Q0805NPO1R5_100TRPF	1.5	A, B, C	400	0.20
NMC-Q0805NPO1R6_100TRPF	1.6	A, B, C	400	0.20
NMC-Q0805NPO1R8_100TRPF	1.8	A, B, C	400	0.20
NMC-Q0805NPO2R0_100TRPF	2.0	A, B, C	400	0.20
NMC-Q0805NPO2R2_100TRPF	2.2	A, B, C	400	0.20
NMC-Q0805NPO2R7_100TRPF	2.7	A, B, C	400	0.15
NMC-Q0805NPO3R3_100TRPF	3.3	A, B, C	350	0.15
NMC-Q0805NPO3R9_100TRPF	3.9	A, B, C	350	0.10
NMC-Q0805NPO4R3_100TRPF	4.3	A, B, C	300	0.10
NMC-Q0805NPO4R7_100TRPF	4.7	A, B, C	300	0.10
NMC-Q0805NPO5R6_100TRPF	5.6	B, C, D	300	0.10
NMC-Q0805NPO6R8_100TRPF	6.8	B, C, D	250	0.10
NMC-Q0805NPO8R2_100TRPF	8.2	B, C, D	200	0.10
NMC-Q0805NPO100_100TRPF	10	F, G, J	150	0.10
NMC-Q0805NPO120_100TRPF	12	F, G, J	100	0.10
NMC-Q0805NPO150_100TRPF	15	F, G, J	100	0.10
NMC-Q0805NPO180_100TRPF	18	F, G, J	100	0.10
NMC-Q0805NPO220_100TRPF	22	F, G, J	100	0.10
NMC-Q0805NPO270_100TRPF	27	F, G, J	75	0.10
NMC-Q0805NPO330_100TRPF	33	F, G, J	60	0.10
NMC-Q0805NPO390_100TRPF	39	F, G, J	40	0.10
NMC-Q0805NPO430_100TRPF	43	F, G, J	25	0.10
NMC-Q0805NPO470_100TRPF	47	F, G, J	25	0.10
NMC-Q0805NPO560_100TRPF	56	F, G, J	10	0.10
NMC-Q0805NPO680_100TRPF	68	F, G, J	3	0.10
NMC-Q0805NPO820_100TRPF	82	F, G, J	3	0.10
NMC-Q0805NPO101_100TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0805 250 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0805NPO0R2_250TRPF	0.2	B	400	0.90
NMC-Q0805NPO0R3_250TRPF	0.3	B	400	0.90
NMC-Q0805NPO0R4_250TRPF	0.4	A, B	400	0.90
NMC-Q0805NPO0R5_250TRPF	0.5	A, B, C	400	0.80
NMC-Q0805NPO0R6_250TRPF	0.6	A, B, C	400	0.70
NMC-Q0805NPO0R7_250TRPF	0.7	A, B, C	400	0.50
NMC-Q0805NPO0R8_250TRPF	0.8	A, B, C	400	0.50
NMC-Q0805NPO0R9_250TRPF	0.9	A, B, C	400	0.40
NMC-Q0805NPO1R0_250TRPF	1.0	A, B, C	400	0.30
NMC-Q0805NPO1R2_250TRPF	1.2	A, B, C	400	0.20
NMC-Q0805NPO1R5_250TRPF	1.5	A, B, C	400	0.20
NMC-Q0805NPO1R6_250TRPF	1.6	A, B, C	400	0.20
NMC-Q0805NPO1R8_250TRPF	1.8	A, B, C	400	0.20
NMC-Q0805NPO2R0_250TRPF	2.0	A, B, C	400	0.20
NMC-Q0805NPO2R2_250TRPF	2.2	A, B, C	400	0.20
NMC-Q0805NPO2R7_250TRPF	2.7	A, B, C	400	0.15
NMC-Q0805NPO3R3_250TRPF	3.3	A, B, C	350	0.15
NMC-Q0805NPO3R9_250TRPF	3.9	A, B, C	350	0.10
NMC-Q0805NPO4R3_250TRPF	4.3	A, B, C	300	0.10
NMC-Q0805NPO4R7_250TRPF	4.7	A, B, C	300	0.10
NMC-Q0805NPO5R6_250TRPF	5.6	B, C, D	300	0.10
NMC-Q0805NPO6R8_250TRPF	6.8	B, C, D	250	0.10
NMC-Q0805NPO8R2_250TRPF	8.2	B, C, D	200	0.10
NMC-Q0805NPO100_250TRPF	10	F, G, J	150	0.10
NMC-Q0805NPO120_250TRPF	12	F, G, J	100	0.10
NMC-Q0805NPO150_250TRPF	15	F, G, J	100	0.10
NMC-Q0805NPO180_250TRPF	18	F, G, J	100	0.10
NMC-Q0805NPO220_250TRPF	22	F, G, J	100	0.10
NMC-Q0805NPO270_250TRPF	27	F, G, J	75	0.10
NMC-Q0805NPO330_250TRPF	33	F, G, J	60	0.10
NMC-Q0805NPO390_250TRPF	39	F, G, J	40	0.10
NMC-Q0805NPO430_250TRPF	43	F, G, J	25	0.10
NMC-Q0805NPO470_250TRPF	47	F, G, J	25	0.10
NMC-Q0805NPO560_250TRPF	56	F, G, J	10	0.10
NMC-Q0805NPO680_250TRPF	68	F, G, J	3	0.10
NMC-Q0805NPO820_250TRPF	82	F, G, J	3	0.10
NMC-Q0805NPO101_250TRPF	100	F, G, J	3	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



0805 500 Volt Standard Values and Characteristics

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q0805NPO0R2_500TRPF	0.2	B	400	0.90
NMC-Q0805NPO0R3_500TRPF	0.3	B	400	0.90
NMC-Q0805NPO0R4_500TRPF	0.4	A, B	400	0.90
NMC-Q0805NPO0R5_500TRPF	0.5	A, B, C	400	0.80
NMC-Q0805NPO0R6_500TRPF	0.6	A, B, C	400	0.70
NMC-Q0805NPO0R7_500TRPF	0.7	A, B, C	400	0.50
NMC-Q0805NPO0R8_500TRPF	0.8	A, B, C	400	0.50
NMC-Q0805NPO0R9_500TRPF	0.9	A, B, C	400	0.40
NMC-Q0805NPO1R0_500TRPF	1.0	A, B, C	400	0.30
NMC-Q0805NPO1R2_500TRPF	1.2	A, B, C	400	0.20
NMC-Q0805NPO1R5_500TRPF	1.5	A, B, C	400	0.20
NMC-Q0805NPO1R6_500TRPF	1.6	A, B, C	400	0.20
NMC-Q0805NPO1R8_500TRPF	1.8	A, B, C	400	0.20
NMC-Q0805NPO2R0_500TRPF	2.0	A, B, C	400	0.20
NMC-Q0805NPO2R2_500TRPF	2.2	A, B, C	400	0.20
NMC-Q0805NPO2R7_500TRPF	2.7	A, B, C	400	0.15
NMC-Q0805NPO3R3_500TRPF	3.3	A, B, C	350	0.15
NMC-Q0805NPO3R9_500TRPF	3.9	A, B, C	350	0.10
NMC-Q0805NPO4R3_500TRPF	4.3	A, B, C	300	0.10
NMC-Q0805NPO4R7_500TRPF	4.7	A, B, C	300	0.10
NMC-Q0805NPO5R6_500TRPF	5.6	B, C, D	300	0.10
NMC-Q0805NPO6R8_500TRPF	6.8	B, C, D	250	0.10
NMC-Q0805NPO8R2_500TRPF	8.2	B, C, D	200	0.10
NMC-Q0805NPO100_500TRPF	10	F, G, J	150	0.10
NMC-Q0805NPO120_500TRPF	12	F, G, J	100	0.10
NMC-Q0805NPO150_500TRPF	15	F, G, J	100	0.10
NMC-Q0805NPO180_500TRPF	18	F, G, J	100	0.10
NMC-Q0805NPO220_500TRPF	22	F, G, J	100	0.10
NMC-Q0805NPO270_500TRPF	27	F, G, J	75	0.10
NMC-Q0805NPO330_500TRPF	33	F, G, J	60	0.10
NMC-Q0805NPO390_500TRPF	39	F, G, J	40	0.10
NMC-Q0805NPO430_500TRPF	43	F, G, J	25	0.10
NMC-Q0805NPO470_500TRPF	47	F, G, J	25	0.10
NMC-Q0805NPO560_500TRPF	56	F, G, J	10	0.10
NMC-Q0805NPO680_500TRPF	68	F, G, J	3	0.10

*Typical Q & ESR

NMC-Q Series

Surface Mount Multilayer Capacitors



1111 50 Volt Standard Values and Characteristics (Typical Q and ESR)

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q1111NPO2R0_50TRPLPF	2.0	A,B,C	365	0.25
NMC-Q1111NPO2R2_50TRPLPF	2.2	A,B,C	365	0.25
NMC-Q1111NPO2R4_50TRPLPF	2.4	A,B,C	350	0.25
NMC-Q1111NPO2R7_50TRPLPF	2.7	A,B,C	300	0.25
NMC-Q1111NPO3R0_50TRPLPF	3.0	A,B,C	250	0.25
NMC-Q1111NPO3R3_50TRPLPF	3.3	A,B,C	205	0.25
NMC-Q1111NPO3R6_50TRPLPF	3.6	A,B,C	200	0.25
NMC-Q1111NPO3R9_50TRPLPF	3.9	A,B,C	200	0.25
NMC-Q1111NPO4R0_50TRPLPF	4.0	A,B,C	200	0.25
NMC-Q1111NPO4R3_50TRPLPF	4.3	A,B,C	200	0.25
NMC-Q1111NPO4R7_50TRPLPF	4.7	A,B,C	200	0.20
NMC-Q1111NPO5R0_50TRPLPF	5.0	A,B,C	200	0.15
NMC-Q1111NPO5R1_50TRPLPF	5.1	B,C,D	200	0.15
NMC-Q1111NPO5R6_50TRPLPF	5.6	B,C,D	200	0.15
NMC-Q1111NPO6R0_50TRPLPF	6.0	B,C,D	200	0.15
NMC-Q1111NPO6R2_50TRPLPF	6.2	B,C,D	200	0.15
NMC-Q1111NPO6R7_50TRPLPF	6.7	B,C,D	200	0.15
NMC-Q1111NPO6R8_50TRPLPF	6.8	B,C,D	200	0.15
NMC-Q1111NPO7R0_50TRPLPF	7.0	B,C,D	200	0.15
NMC-Q1111NPO7R5_50TRPLPF	7.5	B,C,D	200	0.15
NMC-Q1111NPO8R0_50TRPLPF	8.0	B,C,D	200	0.15
NMC-Q1111NPO8R2_50TRPLPF	8.2	B,C,D	200	0.15
NMC-Q1111NPO9R0_50TRPLPF	9.0	B,C,D	150	0.15
NMC-Q1111NPO9R1_50TRPLPF	9.1	B,C,D	150	0.15
NMC-Q1111NPO100_50TRPLPF	10	F,G,J	125	0.15
NMC-Q1111NPO110_50TRPLPF	11	F,G,J	100	0.15
NMC-Q1111NPO120_50TRPLPF	12	F,G,J	100	0.15
NMC-Q1111NPO130_50TRPLPF	13	F,G,J	100	0.15
NMC-Q1111NPO150_50TRPLPF	15	F,G,J	80	0.15
NMC-Q1111NPO160_50TRPLPF	16	F,G,J	80	0.15
NMC-Q1111NPO180_50TRPLPF	18	F,G,J	80	0.15
NMC-Q1111NPO200_50TRPLPF	20	F,G,J	80	0.15
NMC-Q1111NPO220_50TRPLPF	22	F,G,J	80	0.15
NMC-Q1111NPO240_50TRPLPF	24	F,G,J	80	0.15
NMC-Q1111NPO270_50TRPLPF	27	F,G,J	75	0.15
NMC-Q1111NPO300_50TRPLPF	30	F,G,J	65	0.15
NMC-Q1111NPO330_50TRPLPF	33	F,G,J	60	0.15
NMC-Q1111NPO360_50TRPLPF	36	F,G,J	50	0.15
NMC-Q1111NPO390_50TRPLPF	39	F,G,J	40	0.15
NMC-Q1111NPO430_50TRPLPF	43	F,G,J	25	0.15
NMC-Q1111NPO470_50TRPLPF	47	F,G,J	25	0.15
NMC-Q1111NPO510_50TRPLPF	51	F,G,J	10	0.15
NMC-Q1111NPO560_50TRPLPF	56	F,G,J	10	0.15
NMC-Q1111NPO620_50TRPLPF	62	F,G,J	10	0.15
NMC-Q1111NPO680_50TRPLPF	68	F,G,J	10	0.15
NMC-Q1111NPO750_50TRPLPF	75	F,G,J	5	0.05
NMC-Q1111NPO820_50TRPLPF	82	F,G,J	5	0.05
NMC-Q1111NPO910_50TRPLPF	91	F,G,J	5	0.05
NMC-Q1111NPO101_50TRPLPF	100	F,G,J	30 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO121_50TRPLPF	120	F,G,J	20 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO151_50TRPLPF	150	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO181_50TRPLPF	180	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO221_50TRPLPF	220	F,G,J	30 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO271_50TRPLPF	270	F,G,J	20 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO331_50TRPLPF	330	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO391_50TRPLPF	390	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO471_50TRPLPF	470	F,G,J	4 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO561_50TRPLPF	560	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO681_50TRPLPF	680	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO821_50TRPLPF	820	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO102_50TRPLPF	1000	F,G,J	3 at 300MHz	0.15 at 300MHz

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 25
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



1111 100 Volt Standard Values and Characteristics (Typical Q and ESR)

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q1111NPO2R0_100TRPLPF	2.0	A,B,C	365	0.25
NMC-Q1111NPO2R2_100TRPLPF	2.2	A,B,C	365	0.25
NMC-Q1111NPO2R4_100TRPLPF	2.4	A,B,C	350	0.25
NMC-Q1111NPO2R7_100TRPLPF	2.7	A,B,C	300	0.25
NMC-Q1111NPO3R0_100TRPLPF	3.0	A,B,C	250	0.25
NMC-Q1111NPO3R3_100TRPLPF	3.3	A,B,C	205	0.25
NMC-Q1111NPO3R6_100TRPLPF	3.6	A,B,C	200	0.25
NMC-Q1111NPO3R9_100TRPLPF	3.9	A,B,C	200	0.25
NMC-Q1111NPO4R0_100TRPLPF	4.0	A,B,C	200	0.25
NMC-Q1111NPO4R3_100TRPLPF	4.3	A,B,C	200	0.25
NMC-Q1111NPO4R7_100TRPLPF	4.7	A,B,C	200	0.20
NMC-Q1111NPO5R0_100TRPLPF	5.0	A,B,C	200	0.15
NMC-Q1111NPO5R1_100TRPLPF	5.1	B,C,D	200	0.15
NMC-Q1111NPO5R6_100TRPLPF	5.6	B,C,D	200	0.15
NMC-Q1111NPO6R0_100TRPLPF	6.0	B,C,D	200	0.15
NMC-Q1111NPO6R2_100TRPLPF	6.2	B,C,D	200	0.15
NMC-Q1111NPO6R7_100TRPLPF	6.7	B,C,D	200	0.15
NMC-Q1111NPO6R8_100TRPLPF	6.8	B,C,D	200	0.15
NMC-Q1111NPO7R0_100TRPLPF	7.0	B,C,D	200	0.15
NMC-Q1111NPO7R5_100TRPLPF	7.5	B,C,D	200	0.15
NMC-Q1111NPO8R0_100TRPLPF	8.0	B,C,D	200	0.15
NMC-Q1111NPO8R2_100TRPLPF	8.2	B,C,D	200	0.15
NMC-Q1111NPO9R0_100TRPLPF	9.0	B,C,D	150	0.15
NMC-Q1111NPO9R1_100TRPLPF	9.1	B,C,D	150	0.15
NMC-Q1111NPO100_100TRPLPF	10	F,G,J	125	0.15
NMC-Q1111NPO110_100TRPLPF	11	F,G,J	100	0.15
NMC-Q1111NPO120_100TRPLPF	12	F,G,J	100	0.15
NMC-Q1111NPO130_100TRPLPF	13	F,G,J	100	0.15
NMC-Q1111NPO150_100TRPLPF	15	F,G,J	80	0.15
NMC-Q1111NPO160_100TRPLPF	16	F,G,J	80	0.15
NMC-Q1111NPO180_100TRPLPF	18	F,G,J	80	0.15
NMC-Q1111NPO200_100TRPLPF	20	F,G,J	80	0.15
NMC-Q1111NPO220_100TRPLPF	22	F,G,J	80	0.15
NMC-Q1111NPO240_100TRPLPF	24	F,G,J	80	0.15
NMC-Q1111NPO270_100TRPLPF	27	F,G,J	75	0.15
NMC-Q1111NPO300_100TRPLPF	30	F,G,J	65	0.15
NMC-Q1111NPO330_100TRPLPF	33	F,G,J	60	0.15
NMC-Q1111NPO360_100TRPLPF	36	F,G,J	50	0.15
NMC-Q1111NPO390_100TRPLPF	39	F,G,J	40	0.15
NMC-Q1111NPO430_100TRPLPF	43	F,G,J	25	0.15
NMC-Q1111NPO470_100TRPLPF	47	F,G,J	25	0.15
NMC-Q1111NPO510_100TRPLPF	51	F,G,J	10	0.15
NMC-Q1111NPO560_100TRPLPF	56	F,G,J	10	0.15
NMC-Q1111NPO620_100TRPLPF	62	F,G,J	10	0.15
NMC-Q1111NPO680_100TRPLPF	68	F,G,J	10	0.15
NMC-Q1111NPO750_100TRPLPF	75	F,G,J	5	0.05
NMC-Q1111NPO820_100TRPLPF	82	F,G,J	5	0.05
NMC-Q1111NPO910_100TRPLPF	91	F,G,J	5	0.05
NMC-Q1111NPO101_100TRPLPF	100	F,G,J	30 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO121_100TRPLPF	120	F,G,J	20 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO151_100TRPLPF	150	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO181_100TRPLPF	180	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO221_100TRPLPF	220	F,G,J	30 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO271_100TRPLPF	270	F,G,J	20 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO331_100TRPLPF	330	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO391_100TRPLPF	390	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO471_100TRPLPF	470	F,G,J	4 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO561_100TRPLPF	560	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO681_100TRPLPF	680	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO821_100TRPLPF	820	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO102_100TRPLPF	1000	F,G,J	3 at 300MHz	0.15 at 300MHz

Performance Passives By Design

NIC Components Corp.
100 Baylis Road, Melville, NY 11747

Page 26
www.niccomp.com

NMC-Q Series

Surface Mount Multilayer Capacitors



1111 200 Volt Standard Values and Characteristics (Typical Q and ESR)

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q1111NPO2R0_200TRPLPF	2.0	A,B,C	365	0.25
NMC-Q1111NPO2R2_200TRPLPF	2.2	A,B,C	365	0.25
NMC-Q1111NPO2R4_200TRPLPF	2.4	A,B,C	350	0.25
NMC-Q1111NPO2R7_200TRPLPF	2.7	A,B,C	300	0.25
NMC-Q1111NPO3R0_200TRPLPF	3.0	A,B,C	250	0.25
NMC-Q1111NPO3R3_200TRPLPF	3.3	A,B,C	205	0.25
NMC-Q1111NPO3R6_200TRPLPF	3.6	A,B,C	200	0.25
NMC-Q1111NPO3R9_200TRPLPF	3.9	A,B,C	200	0.25
NMC-Q1111NPO4R0_200TRPLPF	4.0	A,B,C	200	0.25
NMC-Q1111NPO4R3_200TRPLPF	4.3	A,B,C	200	0.25
NMC-Q1111NPO4R7_200TRPLPF	4.7	A,B,C	200	0.20
NMC-Q1111NPO5R0_200TRPLPF	5.0	A,B,C	200	0.15
NMC-Q1111NPO5R1_200TRPLPF	5.1	B,C,D	200	0.15
NMC-Q1111NPO5R6_200TRPLPF	5.6	B,C,D	200	0.15
NMC-Q1111NPO6R0_200TRPLPF	6.0	B,C,D	200	0.15
NMC-Q1111NPO6R2_200TRPLPF	6.2	B,C,D	200	0.15
NMC-Q1111NPO6R7_200TRPLPF	6.7	B,C,D	200	0.15
NMC-Q1111NPO6R8_200TRPLPF	6.8	B,C,D	200	0.15
NMC-Q1111NPO7R0_200TRPLPF	7.0	B,C,D	200	0.15
NMC-Q1111NPO7R5_200TRPLPF	7.5	B,C,D	200	0.15
NMC-Q1111NPO8R0_200TRPLPF	8.0	B,C,D	200	0.15
NMC-Q1111NPO8R2_200TRPLPF	8.2	B,C,D	200	0.15
NMC-Q1111NPO9R0_200TRPLPF	9.0	B,C,D	150	0.15
NMC-Q1111NPO9R1_200TRPLPF	9.1	B,C,D	150	0.15
NMC-Q1111NPO100_200TRPLPF	10	F,G,J	125	0.15
NMC-Q1111NPO110_200TRPLPF	11	F,G,J	100	0.15
NMC-Q1111NPO120_200TRPLPF	12	F,G,J	100	0.15
NMC-Q1111NPO130_200TRPLPF	13	F,G,J	100	0.15
NMC-Q1111NPO150_200TRPLPF	15	F,G,J	80	0.15
NMC-Q1111NPO160_200TRPLPF	16	F,G,J	80	0.15
NMC-Q1111NPO180_200TRPLPF	18	F,G,J	80	0.15
NMC-Q1111NPO200_200TRPLPF	20	F,G,J	80	0.15
NMC-Q1111NPO220_200TRPLPF	22	F,G,J	80	0.15
NMC-Q1111NPO240_200TRPLPF	24	F,G,J	80	0.15
NMC-Q1111NPO270_200TRPLPF	27	F,G,J	75	0.15
NMC-Q1111NPO300_200TRPLPF	30	F,G,J	65	0.15
NMC-Q1111NPO330_200TRPLPF	33	F,G,J	60	0.15
NMC-Q1111NPO360_200TRPLPF	36	F,G,J	50	0.15
NMC-Q1111NPO390_200TRPLPF	39	F,G,J	40	0.15
NMC-Q1111NPO430_200TRPLPF	43	F,G,J	25	0.15
NMC-Q1111NPO470_200TRPLPF	47	F,G,J	25	0.15
NMC-Q1111NPO510_200TRPLPF	51	F,G,J	10	0.15
NMC-Q1111NPO560_200TRPLPF	56	F,G,J	10	0.15
NMC-Q1111NPO620_200TRPLPF	62	F,G,J	10	0.15
NMC-Q1111NPO680_200TRPLPF	68	F,G,J	10	0.15
NMC-Q1111NPO750_200TRPLPF	75	F,G,J	5	0.05
NMC-Q1111NPO820_200TRPLPF	82	F,G,J	5	0.05
NMC-Q1111NPO910_200TRPLPF	91	F,G,J	5	0.05
NMC-Q1111NPO101_200TRPLPF	100	F,G,J	30 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO121_200TRPLPF	120	F,G,J	20 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO151_200TRPLPF	150	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO181_200TRPLPF	180	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO221_200TRPLPF	220	F,G,J	30 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO271_200TRPLPF	270	F,G,J	20 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO331_200TRPLPF	330	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO391_200TRPLPF	390	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO471_200TRPLPF	470	F,G,J	4 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO561_200TRPLPF	560	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO681_200TRPLPF	680	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO821_200TRPLPF	820	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO102_200TRPLPF	1000	F,G,J	3 at 300MHz	0.15 at 300MHz

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 27
www.niccomp.com

Last Updated 8/23/2024. Specification subject to change without notice. Please check web site for latest information.

NMC-Q Series

Surface Mount Multilayer Capacitors



1111 250 Volt Standard Values and Characteristics (Typical Q and ESR)

NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q1111NPO2R0_250TRPLPF	2.0	A,B,C	365	0.25
NMC-Q1111NPO2R2_250TRPLPF	2.2	A,B,C	365	0.25
NMC-Q1111NPO2R4_250TRPLPF	2.4	A,B,C	350	0.25
NMC-Q1111NPO2R7_250TRPLPF	2.7	A,B,C	300	0.25
NMC-Q1111NPO3R0_250TRPLPF	3.0	A,B,C	250	0.25
NMC-Q1111NPO3R3_250TRPLPF	3.3	A,B,C	205	0.25
NMC-Q1111NPO3R6_250TRPLPF	3.6	A,B,C	200	0.25
NMC-Q1111NPO3R9_250TRPLPF	3.9	A,B,C	200	0.25
NMC-Q1111NPO4R0_250TRPLPF	4.0	A,B,C	200	0.25
NMC-Q1111NPO4R3_250TRPLPF	4.3	A,B,C	200	0.25
NMC-Q1111NPO4R7_250TRPLPF	4.7	A,B,C	200	0.20
NMC-Q1111NPO5R0_250TRPLPF	5.0	A,B,C	200	0.15
NMC-Q1111NPO5R1_250TRPLPF	5.1	B,C,D	200	0.15
NMC-Q1111NPO5R6_250TRPLPF	5.6	B,C,D	200	0.15
NMC-Q1111NPO6R0_250TRPLPF	6.0	B,C,D	200	0.15
NMC-Q1111NPO6R2_250TRPLPF	6.2	B,C,D	200	0.15
NMC-Q1111NPO6R7_250TRPLPF	6.7	B,C,D	200	0.15
NMC-Q1111NPO6R8_250TRPLPF	6.8	B,C,D	200	0.15
NMC-Q1111NPO7R0_250TRPLPF	7.0	B,C,D	200	0.15
NMC-Q1111NPO7R5_250TRPLPF	7.5	B,C,D	200	0.15
NMC-Q1111NPO8R0_250TRPLPF	8.0	B,C,D	200	0.15
NMC-Q1111NPO8R2_250TRPLPF	8.2	B,C,D	200	0.15
NMC-Q1111NPO9R0_250TRPLPF	9.0	B,C,D	150	0.15
NMC-Q1111NPO9R1_250TRPLPF	9.1	B,C,D	150	0.15
NMC-Q1111NPO100_250TRPLPF	10	F,G,J	125	0.15
NMC-Q1111NPO110_250TRPLPF	11	F,G,J	100	0.15
NMC-Q1111NPO120_250TRPLPF	12	F,G,J	100	0.15
NMC-Q1111NPO130_250TRPLPF	13	F,G,J	100	0.15
NMC-Q1111NPO150_250TRPLPF	15	F,G,J	80	0.15
NMC-Q1111NPO160_250TRPLPF	16	F,G,J	80	0.15
NMC-Q1111NPO180_250TRPLPF	18	F,G,J	80	0.15
NMC-Q1111NPO200_250TRPLPF	20	F,G,J	80	0.15
NMC-Q1111NPO220_250TRPLPF	22	F,G,J	80	0.15
NMC-Q1111NPO240_250TRPLPF	24	F,G,J	80	0.15
NMC-Q1111NPO270_250TRPLPF	27	F,G,J	75	0.15
NMC-Q1111NPO300_250TRPLPF	30	F,G,J	65	0.15
NMC-Q1111NPO330_250TRPLPF	33	F,G,J	60	0.15
NMC-Q1111NPO360_250TRPLPF	36	F,G,J	50	0.15
NMC-Q1111NPO390_250TRPLPF	39	F,G,J	40	0.15
NMC-Q1111NPO430_250TRPLPF	43	F,G,J	25	0.15
NMC-Q1111NPO470_250TRPLPF	47	F,G,J	25	0.15
NMC-Q1111NPO510_250TRPLPF	51	F,G,J	10	0.15
NMC-Q1111NPO560_250TRPLPF	56	F,G,J	10	0.15
NMC-Q1111NPO620_250TRPLPF	62	F,G,J	10	0.15
NMC-Q1111NPO680_250TRPLPF	68	F,G,J	10	0.15
NMC-Q1111NPO750_250TRPLPF	75	F,G,J	5	0.05
NMC-Q1111NPO820_250TRPLPF	82	F,G,J	5	0.05
NMC-Q1111NPO910_250TRPLPF	91	F,G,J	5	0.05
NMC-Q1111NPO101_250TRPLPF	100	F,G,J	30 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO121_250TRPLPF	120	F,G,J	20 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO151_250TRPLPF	150	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO181_250TRPLPF	180	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO221_250TRPLPF	220	F,G,J	30 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO271_250TRPLPF	270	F,G,J	20 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO331_250TRPLPF	330	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO391_250TRPLPF	390	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO471_250TRPLPF	470	F,G,J	4 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO561_250TRPLPF	560	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO681_250TRPLPF	680	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO821_250TRPLPF	820	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO102_250TRPLPF	1000	F,G,J	3 at 300MHz	0.15 at 300MHz

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 28
www.niccomp.com

Downloaded from Arrow.com. Last Updated 8/23/2024. Specification subject to change without notice. Please check web site for latest information.

NMC-Q Series

Surface Mount Multilayer Capacitors



1111 500 Volt Standard Values and Characteristics (Typical Q and ESR)











NIC PART NUMBER	CAPACITANCE VALUE (pF)	AVAILABLE TOLERANCE	Q FACTOR (typ. @ 1GHz)*	ESR Ω (typ. @ 1GHz)*
NMC-Q1111NPO2R0_500TRPLPF	2.0	A,B,C	365	0.25
NMC-Q1111NPO2R2_500TRPLPF	2.2	A,B,C	365	0.25
NMC-Q1111NPO2R4_500TRPLPF	2.4	A,B,C	350	0.25
NMC-Q1111NPO2R7_500TRPLPF	2.7	A,B,C	300	0.25
NMC-Q1111NPO3R0_500TRPLPF	3.0	A,B,C	250	0.25
NMC-Q1111NPO3R3_500TRPLPF	3.3	A,B,C	205	0.25
NMC-Q1111NPO3R6_500TRPLPF	3.6	A,B,C	200	0.25
NMC-Q1111NPO3R9_500TRPLPF	3.9	A,B,C	200	0.25
NMC-Q1111NPO4R0_500TRPLPF	4.0	A,B,C	200	0.25
NMC-Q1111NPO4R3_500TRPLPF	4.3	A,B,C	200	0.25
NMC-Q1111NPO4R7_500TRPLPF	4.7	A,B,C	200	0.20
NMC-Q1111NPO5R0_500TRPLPF	5.0	A,B,C	200	0.15
NMC-Q1111NPO5R1_500TRPLPF	5.1	B,C,D	200	0.15
NMC-Q1111NPO5R6_500TRPLPF	5.6	B,C,D	200	0.15
NMC-Q1111NPO6R0_500TRPLPF	6.0	B,C,D	200	0.15
NMC-Q1111NPO6R2_500TRPLPF	6.2	B,C,D	200	0.15
NMC-Q1111NPO6R7_500TRPLPF	6.7	B,C,D	200	0.15
NMC-Q1111NPO6R8_500TRPLPF	6.8	B,C,D	200	0.15
NMC-Q1111NPO7R0_500TRPLPF	7.0	B,C,D	200	0.15
NMC-Q1111NPO7R5_500TRPLPF	7.5	B,C,D	200	0.15
NMC-Q1111NPO8R0_500TRPLPF	8.0	B,C,D	200	0.15
NMC-Q1111NPO8R2_500TRPLPF	8.2	B,C,D	200	0.15
NMC-Q1111NPO9R0_500TRPLPF	9.0	B,C,D	150	0.15
NMC-Q1111NPO9R1_500TRPLPF	9.1	B,C,D	150	0.15
NMC-Q1111NPO100_500TRPLPF	10	F,G,J	125	0.15
NMC-Q1111NPO110_500TRPLPF	11	F,G,J	100	0.15
NMC-Q1111NPO120_500TRPLPF	12	F,G,J	100	0.15
NMC-Q1111NPO130_500TRPLPF	13	F,G,J	100	0.15
NMC-Q1111NPO150_500TRPLPF	15	F,G,J	80	0.15
NMC-Q1111NPO160_500TRPLPF	16	F,G,J	80	0.15
NMC-Q1111NPO180_500TRPLPF	18	F,G,J	80	0.15
NMC-Q1111NPO200_500TRPLPF	20	F,G,J	80	0.15
NMC-Q1111NPO220_500TRPLPF	22	F,G,J	80	0.15
NMC-Q1111NPO240_500TRPLPF	24	F,G,J	80	0.15
NMC-Q1111NPO270_500TRPLPF	27	F,G,J	75	0.15
NMC-Q1111NPO300_500TRPLPF	30	F,G,J	65	0.15
NMC-Q1111NPO330_500TRPLPF	33	F,G,J	60	0.15
NMC-Q1111NPO360_500TRPLPF	36	F,G,J	50	0.15
NMC-Q1111NPO390_500TRPLPF	39	F,G,J	40	0.15
NMC-Q1111NPO430_500TRPLPF	43	F,G,J	25	0.15
NMC-Q1111NPO470_500TRPLPF	47	F,G,J	25	0.15
NMC-Q1111NPO510_500TRPLPF	51	F,G,J	10	0.15
NMC-Q1111NPO560_500TRPLPF	56	F,G,J	10	0.15
NMC-Q1111NPO620_500TRPLPF	62	F,G,J	10	0.15
NMC-Q1111NPO680_500TRPLPF	68	F,G,J	10	0.15
NMC-Q1111NPO750_500TRPLPF	75	F,G,J	5	0.05
NMC-Q1111NPO820_500TRPLPF	82	F,G,J	5	0.05
NMC-Q1111NPO910_500TRPLPF	91	F,G,J	5	0.05
NMC-Q1111NPO101_500TRPLPF	100	F,G,J	30 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO121_500TRPLPF	120	F,G,J	20 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO151_500TRPLPF	150	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO181_500TRPLPF	180	F,G,J	10 at 700MHz	0.10 at 700MHz
NMC-Q1111NPO221_500TRPLPF	220	F,G,J	30 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO271_500TRPLPF	270	F,G,J	20 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO331_500TRPLPF	330	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO391_500TRPLPF	390	F,G,J	10 at 500MHz	0.10 at 500MHz
NMC-Q1111NPO471_500TRPLPF	470	F,G,J	4 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO561_500TRPLPF	560	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO681_500TRPLPF	680	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO821_500TRPLPF	820	F,G,J	3 at 300MHz	0.20 at 300MHz
NMC-Q1111NPO102_500TRPLPF	1000	F,G,J	3 at 300MHz	0.15 at 300MHz

Performance Passives By Design










NIC Components Corp.
100 Baylis Road. Melville, NY 11747


Page 29
www.niccomp.com

Performance Curves

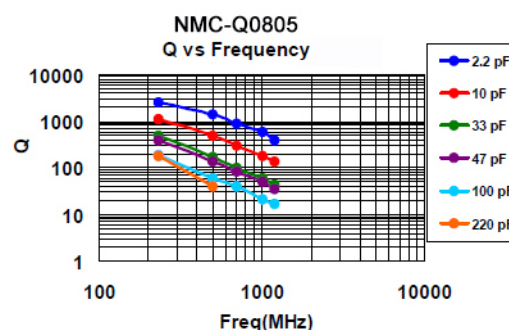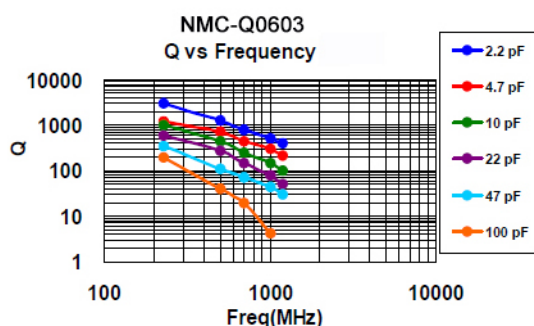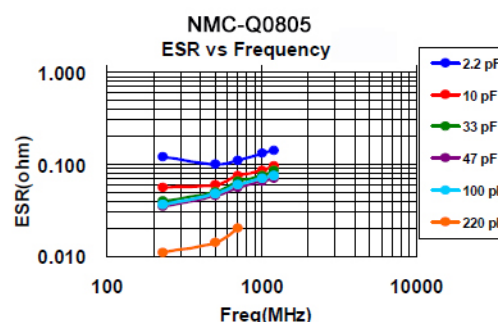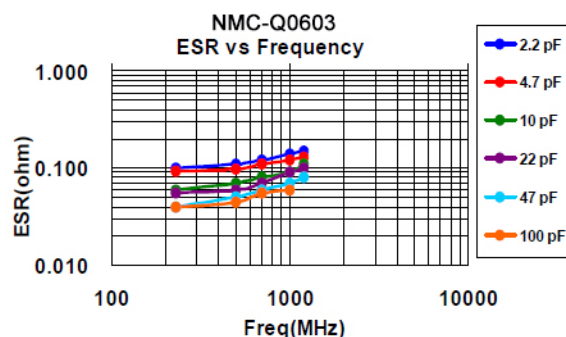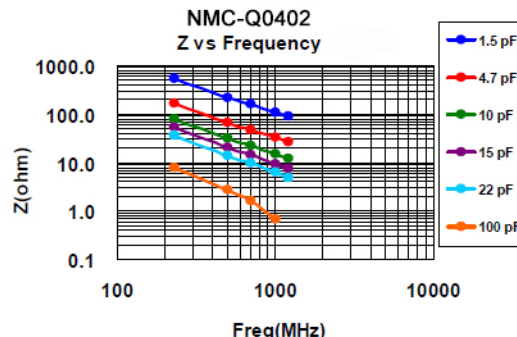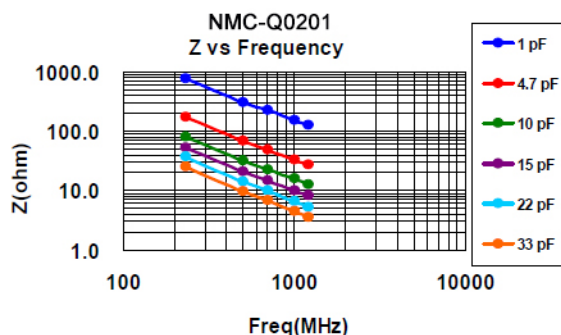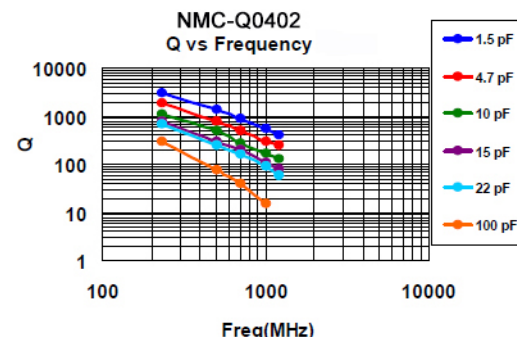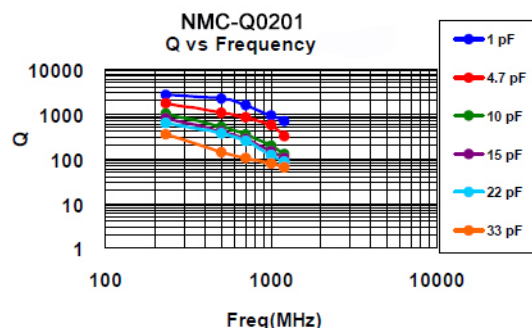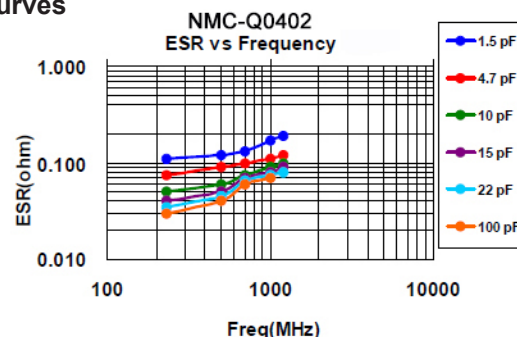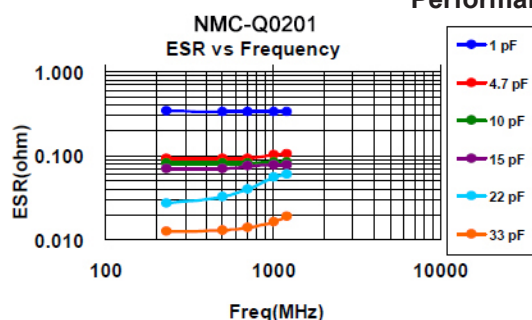


Performance Curves

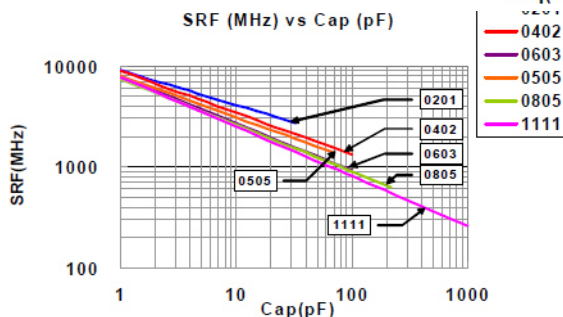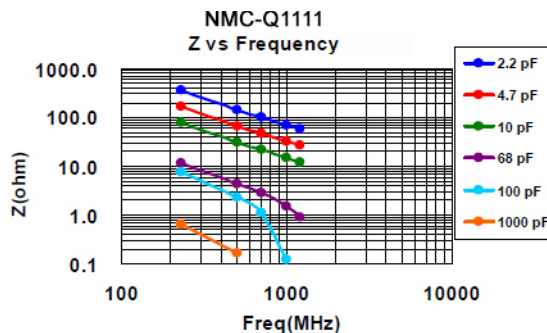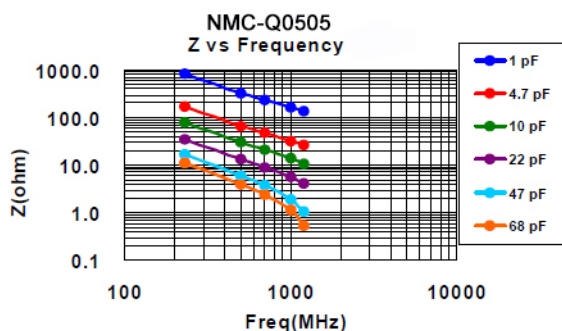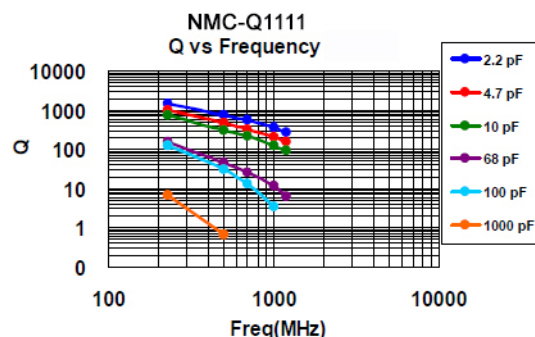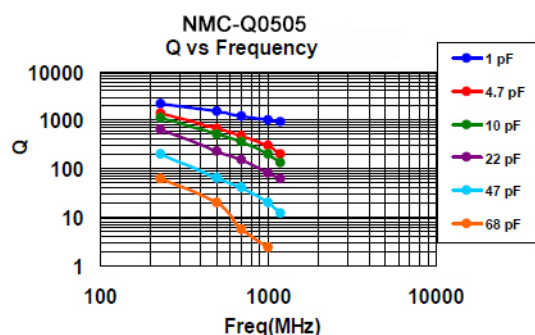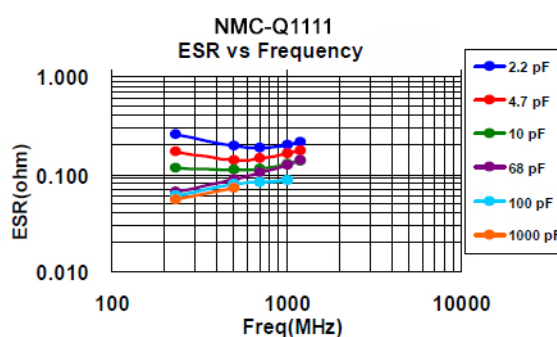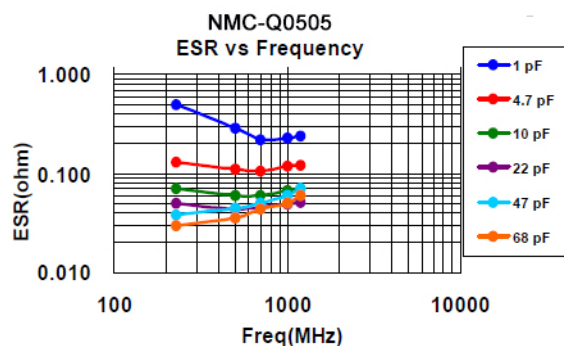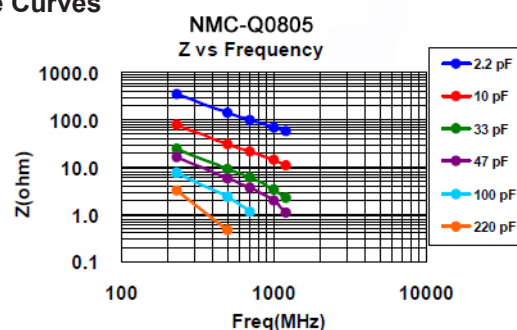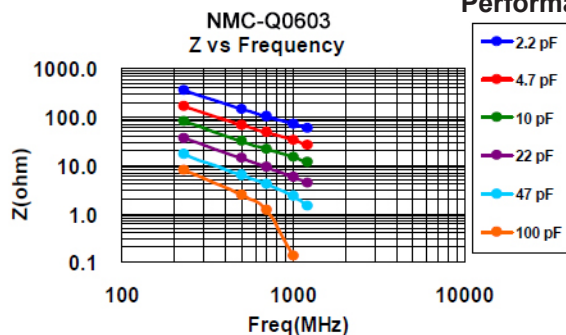


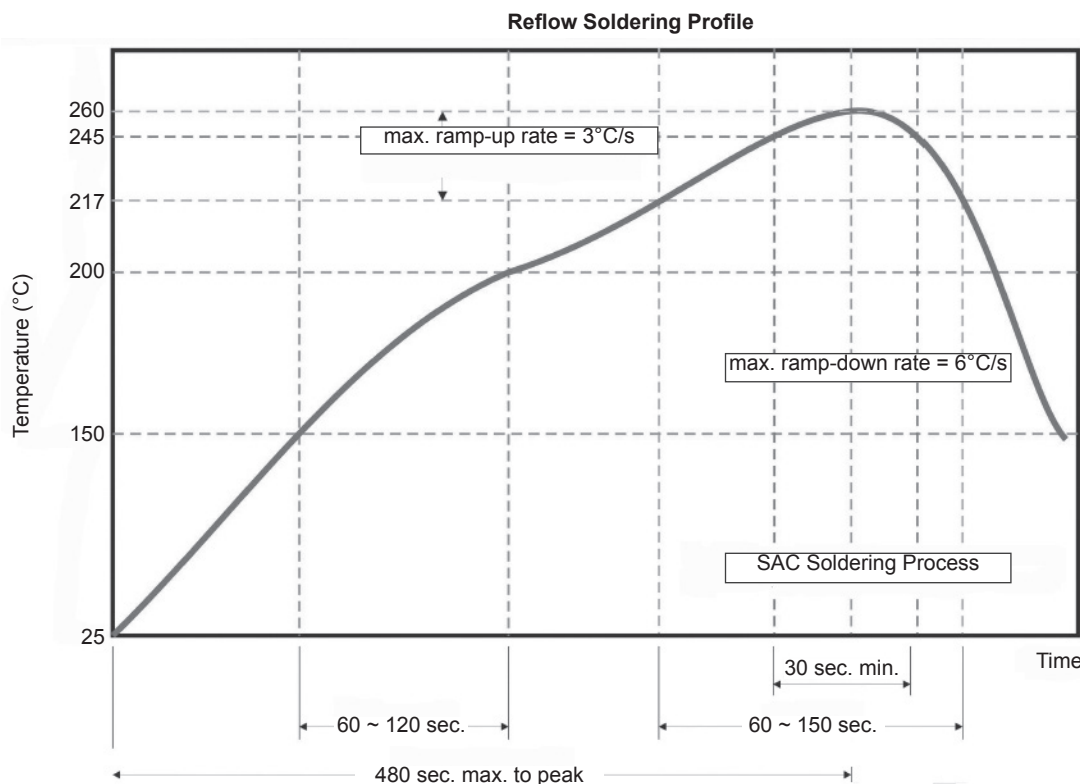

LAND PATTERN DIMENSIONS (mm)

EIA Case Size	0201	0402	0505	0603	0805	1111
A	0.65 ± 0.05	1.50 ± 0.15	3.43 ± 0.25	2.30 ± 0.25	2.80 ± 0.25	4.62 ± 0.25
B	0.23 ± 0.05	0.40 ± 0.15	0.94 ± 0.25	0.70 ± 0.25	1.00 ± 0.25	2.01 ± 0.25
C	0.21 ± 0.05	0.50 ± 0.15	1.42 ± 0.25	0.80 ± 0.25	0.90 ± 0.25	1.42 ± 0.25
D	0.30 ± 0.05	0.50 ± 0.15	2.11 ± 0.25	0.80 ± 0.25	1.30 ± 0.25	3.45 ± 0.25

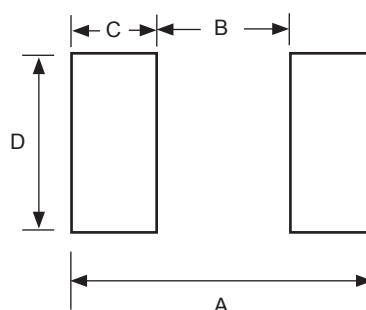

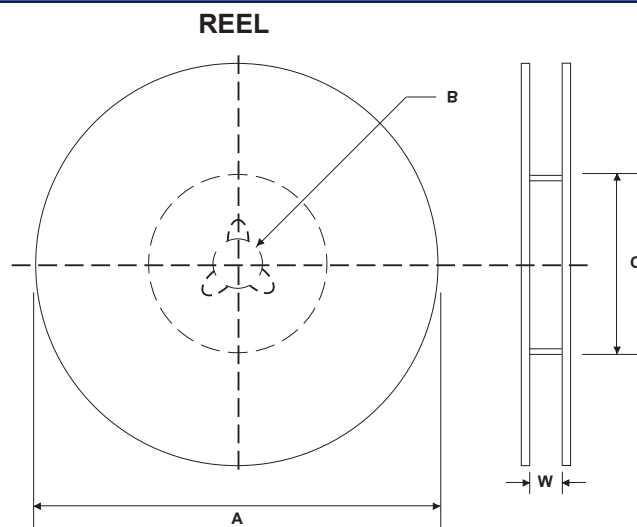

REEL DIMENSIONS (mm)

Reel Diameter (A)	B	C	W1
7" (178 ± 1.0)	13 +0.5/-0.2	60.5 ±1.0	8.4 +1.5/-0
10" (250 ± 1.0)		100 ± 1.0	
13" (330 ± 1.0)			


REEL QUANTITIES

Size	0201	0402	0505	0603	0805	1111
7"	15,000	10,000	3,000	4,000	4,000	2,000
10"	-	-	-	10,000	-	-
13"	-	50,000	-	15,000	15,000	-

PUNCHED CARRIER TAPE DIMENSIONS (mm)

Type	A ₀	B ₀	W	F	E	P0	P1	P2	D0	T
0201	0.37 ± 0.03	0.67 ± 0.03	8.00 ± 0.10	3.50 ± 0.05	1.75 ± 0.05	4.0 ± 0.10	2.0 ± 0.05	2.0 ± 0.05	1.55 ± 0.05	0.42 ± 0.30
0402	0.62 ± 0.05	1.12 ± 0.05								0.60 ± 0.05
0505	1.90 max.	1.90 max.					4.0 ± 0.10			1.50 max.
0603	1.00 + 0.05/- 0.10	1.80 ± 0.10								0.95 ± 0.05
0805	1.50 ± 0.10	2.30 ± 0.10								

CARDBOARD CARRIER TAPE

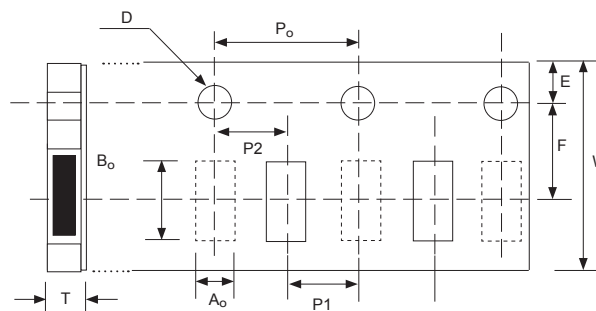

EMBOSSED PLASTIC CARRIER TAPE DIMENSIONS (mm)

Type	A ₀	B ₀	W	F	E	P ₀	P ₁	P ₂	D ₀	K	T
1111	<3.05	<3.80	8.00 ± 0.20	3.50 ± 0.05	1.75 ± 0.10	4.0 ± 0.10	4.0 ± 0.10	2.0 ± 0.05	1.50 +0.1/-0	<2.50	0.23 ± 0.10

