

Our unique linear-to-rotational, industrial-grade string encoder module mates to virtually any encoder giving you a cost-effective linear position measurement solution that precisely fits your requirements. The PT8600 takes just minutes to install, fits easily into tight areas and does not require perfectly parallel alignment. To order, simply select the stroke range, the cable tension and the mounting style that matches your encoder.

If you want us to provide the encoder or you don't see the mounting style you need, please give us a call.

# **PT8600**

# String Encoder

Converts ANY Rotary Encoder to a Linear Position Sensor Linear Stroke Range up to 50 inches (1250 mm) Mates Virtually ANY Customer Supplied Encoder Factory Supplied Encoder Available



# Full Stroke Range Options

 English Ranges
 0-25, 0-50 in.

 Metric Ranges
 0-625, 0-1250 mm

## Motion Conversion Ratio

English Ranges 5 inches per turn, see ordering information

Metric Ranges 125 mm per turn, see ordering information

## General

**Accuracy** ±0.04% full stroke, contact factory for better

accuracy

Measuring Cable Optionssee ordering informationModule Materialpowder-painted aluminum

Maximum Allowable Rotational 1.0 in-lbs.

**Sensor Torque** 


Weight 3 lbs. max.

**Environmental** 

Operating Temperature -40° to 200°F (-40° to 90°C)


SENSOR SOLUTIONS /// PT8600 12//2015 Page 1



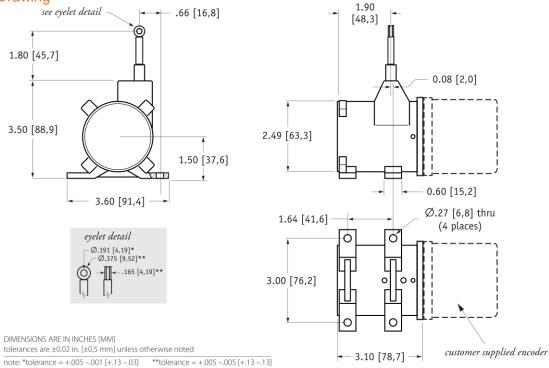

## **Ordering Information**

#### **Model Number:**



Sample Model Number:

PT8600 - 0025 - 111 - BR - F01

range:
 measuring cable tension:
 measuring cable:

standard (12 oz.) .034 nylon-coated stainless

cable guide option: cable brush rotational sensor mounting style: F01 (2.5-in. sq. flange)


## Full Stroke Range:

order code:	0025	0050	0625	1250
full stroke range, min:	25 in.	50 in.	625 mm	1250 mm

## **Measuring Cable Tension:**




### **Measuring Cable:**

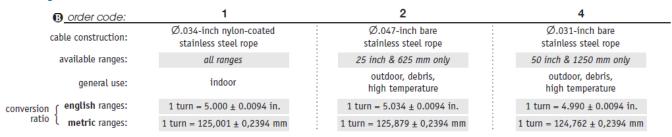


<sup>»</sup> Trying to reorder but can't find your existing model number? Please contact factory for help.

## **Cable Guide Options:**

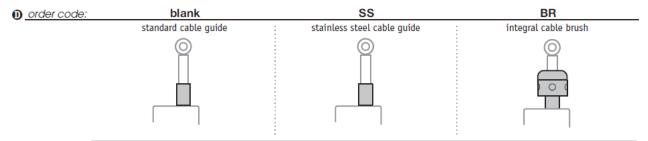


### **Rotational Sensor Mounting Style:**




Note: If you don't see your encoder style, please contact factory. All encoder types supported.

F01 - 21/2-inch Sq. Flange Mount (3/8-inch shaft)




F02 - 2-inch Sq. Flange Mount (3/8-inch shaft)




all dimensions are in **inches** 


## SO1 - Face-Mount (6mm shaft/M4 screws)



### SO2 - Face-Mount (10mm shaft/M4 screws)



### SO4 - Face-Mount (10mm shaft/M3 screws)



#### **PT8600**

String Encoder

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity company 20630 Plummer Street Chatsworth, CA 91311 Tel +1 800 423 5483 Tel +1 818 701 2750

Fax +1 818 701 2799 customercare.chtw@te.com

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT8600 12/01/2015