

Power Relays ( Over 2 A )  
**LQ RELAYS**


Product Catalog

**IN Your  
Future**


# LQ RELAYS

Compliant with IEC/EN60335-1<sup>\*1\*2</sup>, IEC/EN60079-15<sup>\*3</sup> 1 Form A/1 Form C 10 A small power relays

Protective construction:  
 Standard type, Inrush/reinforced insulation type: Sealed  
 Reflow soldering type: Flux-resistant



Standard type,  
Inrush/reinforced insulation type



Reflow soldering type

(Unit : mm)

## FEATURES


- Compact with high capacity:  
1 Form A / 1 Form C, 10 A
- Inrush/reinforced insulation type has TV-3 rating ( UL/C-UL approved )
- Compliant with IEC/EN60335-1 <sup>\*1\*2</sup>  
( VDE approved )  
( Except Reflow soldering type )  
\*1: Common safety standard for major electrical appliance  
\*2: 1 Form A type is compatible except for the bottom surface
- Compliant with IEC/EN60079-15 <sup>\*3</sup>  
( Except Reflow soldering type )  
\*3: Explosion-proof certification

## TYPICAL APPLICATIONS

- Home appliance
- Industrial equipment

## ORDERING INFORMATION ( PART NO. )

### ALQ

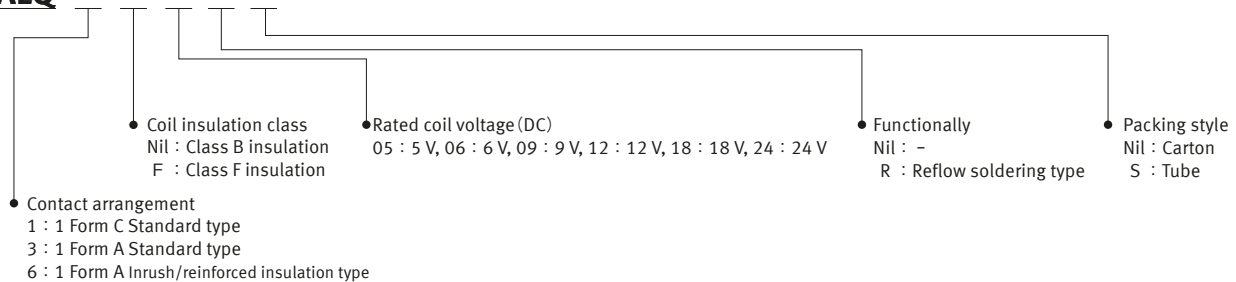

Notes) 1: The "S" at the end of the part number only appears on the inner and outer packing. It does not appear on the relay itself.  
 2: 48V DC types is also available. Please contact our sales representative for details.  
 3: Inrush/reinforced insulation type are Class F insulation, 12 V DC, 24 V DC only.  
 4: Reflow soldering type is only tube.

# Power Relays ( Over 2 A ) LQ RELAYS

## TYPES

### Standard type

Contact arrangement	Rated coil voltage	Part No. *		Standard packing	
		Class B insulation	Class F insulation	Inner carton	Outer carton
1 Form A	5 V DC	ALQ305	ALQ3F05	Carton: 100 pcs. Tube: 50 pcs.	Carton: 500 pcs. Tube: 1,000 pcs.
	6 V DC	ALQ306	ALQ3F06		
	9 V DC	ALQ309	ALQ3F09		
	12 V DC	ALQ312	ALQ3F12		
	18 V DC	ALQ318	ALQ3F18		
	24 V DC	ALQ324	ALQ3F24		
1 Form C	5 V DC	ALQ105	ALQ1F05		
	6 V DC	ALQ106	ALQ1F06		
	9 V DC	ALQ109	ALQ1F09		
	12 V DC	ALQ112	ALQ1F12		
	18 V DC	ALQ118	ALQ1F18		
	24 V DC	ALQ124	ALQ1F24		

\* Tube packing types available. When ordering, please add suffix " S ".

### Inrush /reinforced insulation type

Contact arrangement	Rated coil voltage	Part No. *	Standard packing	
			Inner carton	Outer carton
1 Form A	12 V DC	ALQ6F12	Carton: 100 pcs. Tube: 50 pcs.	Carton: 500 pcs. Tube: 1,000 pcs.
	24 V DC	ALQ6F24		

\* Tube packing types available. When ordering, please add suffix " S ".

### Reflow soldering type

Contact arrangement	Rated coil voltage	Part NO*	Standard packing	
			Inner carton	Outer carton
1 Form C	5 V DC	ALQ1F05RS	Tube: 50 pcs.	Tube: 1,000 pcs.
	6 V DC	ALQ1F06RS		
	9 V DC	ALQ1F09RS		
	12 V DC	ALQ1F12RS		
	18 V DC	ALQ1F18RS		
	24 V DC	ALQ1F24RS		

\* Reflow soldering type is only tube.

# Power Relays ( Over 2 A ) LQ RELAYS

## RATING

### Coil data

- Operating characteristics such as " Operate voltage " and " Release voltage " are influenced by mounting conditions or ambient temperature, etc.  
Therefore, please use the relay within  $\pm 5\%$  of rated coil voltage.
- " Initial " means the condition of products at the time of delivery.

### Standard type

Contact arrangement	Rated coil voltage	Operate voltage* <sup>1</sup> ( at 20 °C )	Release voltage* <sup>1</sup> ( at 20 °C )	Rated operating current ( $\pm 10\%$ , at 20 °C )	Coil resistance ( $\pm 10\%$ , at 20 °C )	Rated operating power	Max. allowable voltage
1 Form A	5 V DC	Max. 75 % V of rated coil voltage ( initial )	Min. 5 % V of rated coil voltage ( initial )	40 mA	125 $\Omega$	200 mW	130 % of rated coil voltage ( at 85 °C ) * <sup>2</sup> 180 % of rated coil voltage ( at 20 °C )
	6 V DC			33.3 mA	180 $\Omega$		
	9 V DC			22.2 mA	405 $\Omega$		
	12 V DC			16.7 mA	720 $\Omega$		
	18 V DC			11.1 mA	1,620 $\Omega$		
	24 V DC			8.3 mA	2,880 $\Omega$		
1 Form C	5 V DC	Max. 75 % V of rated coil voltage ( initial )	Min. 5 % V of rated coil voltage ( initial )	80 mA	62.5 $\Omega$	400 mW	110 % of rated coil voltage ( at 85 °C ) * <sup>2</sup> 150 % of rated coil voltage ( at 20 °C )
	6 V DC			66.7 mA	90 $\Omega$		
	9 V DC			44.4 mA	202.5 $\Omega$		
	12 V DC			33.3 mA	360 $\Omega$		
	18 V DC			22.2 mA	810 $\Omega$		
	24 V DC			16.7 mA	1,440 $\Omega$		

\*1: Square, pulse drive

\*2: When using relays in a high ambient temperature, consider the operate voltage rise due to the high temperature ( a rise of approx. 0.4 % V for each 1 °C with 20 °C as a reference ) and use a coil impressed voltage that is within the maximum applied voltage range.

### Inrush/reinforced insulation type

Contact arrangement	Rated coil voltage	Operate voltage* <sup>1</sup> ( at 20 °C )	Release voltage* <sup>1</sup> ( at 20 °C )	Rated operating current ( $\pm 10\%$ , at 20 °C )	Coil resistance ( $\pm 10\%$ , at 20 °C )	Rated operating power	Max. allowable voltage
1 Form A	12 V DC	Max. 80 % V of rated coil voltage ( initial )	Min. 5 % V of rated coil voltage ( initial )	16.7 mA	720 $\Omega$	200 mW	130 % of rated coil voltage ( at 85 °C ) * <sup>2</sup> 180 % of rated coil voltage ( at 20 °C )
	24 V DC			8.3 mA	2,880 $\Omega$		

\*1: Square, pulse drive

\*2: When using relays in a high ambient temperature, consider the operate voltage rise due to the high temperature ( a rise of approx. 0.4 % V for each 1 °C with 20 °C as a reference ) and use a coil impressed voltage that is within the maximum applied voltage range.

### Reflow soldering type

Contact arrangement	Rated coil voltage	Operate voltage* <sup>1</sup> ( at 20 °C )	Release voltage* <sup>1</sup> ( at 20 °C )	Rated operating current ( $\pm 10\%$ , at 20 °C )	Coil resistance ( $\pm 10\%$ , at 20 °C )	Rated operating power	Max. allowable voltage
1 Form C	5 V DC	Max. 75 % V of rated coil voltage ( initial )	Min. 5 % V of rated coil voltage ( initial )	80 mA	62.5 $\Omega$	400 mW	110 % of rated coil voltage ( at 85 °C ) * <sup>2</sup> 150 % of rated coil voltage ( at 20 °C )
	6 V DC			66.7 mA	90 $\Omega$		
	9 V DC			44.4 mA	202.5 $\Omega$		
	12 V DC			33.3 mA	360 $\Omega$		
	18 V DC			22.2 mA	810 $\Omega$		
	24 V DC			16.7 mA	1,440 $\Omega$		

\*1: Square, pulse drive

\*2: When using relays in a high ambient temperature, consider the operate voltage rise due to the high temperature ( a rise of approx. 0.4 % V for each 1 °C with 20 °C as a reference ) and use a coil impressed voltage that is within the maximum applied voltage range.

# Power Relays ( Over 2 A ) LQ RELAYS

## Specifications

Item		Standard type	Standard type	Inrush/ reinforced insulation type	Reflow soldering type
Contact data	Contact arrangement	1 Form A	1 Form C	1 Form A	1 Form C
	Contact resistance ( initial )	Max. 100 mΩ ( by voltage drop 6 V DC 1 A )			
	Contact material	AgNi type		AgSnO <sub>2</sub> type ( Movable ) / AgNi type ( Stationary )	AgNi type
	Contact rating ( resistive )	5 A 30 V DC, 10 A 125 V AC, 5 A 250 V AC	Form A contact: 10 A 125 V AC, 5 A 250 V AC, 5 A 30 V DC	10 A 125 V AC, 8 A 250 V AC, 5 A 30 V DC	Form A contact: 10 A 125 V AC, 5 A 250 V AC, 5 A 30 V DC
			Form B contact: 3 A 125 V AC, 2 A 250 V AC, 1 A 30 V DC		Form B contact: 3 A 125 V AC, 2 A 250 V AC, 1 A 30 V DC
	Max. switching power ( resistive )	1,250 VA, 150 W	Form A contact: 1,250 VA, 150 W	2,000 VA, 150 W	Form A contact: 1,250 VA, 150 W
			Form B contact: 500 VA, 30 W		Form B contact: 500 VA, 30 W
	Max. switching voltage	250 V AC, 30 V DC			
	Max. switching current	10 A ( 125 V AC ), 5 A ( 30 V DC )	1 Form A: 10 A ( 125 V AC ), 5 A ( 30 V DC )	10 A ( 125 V AC ), 5 A ( 30 V DC )	1 Form A: 10 A ( 125 V AC ), 5 A ( 30 V DC )
1 Form B: 3 A ( 125 V AC ), 1 A ( 30 V DC )			1 Form B: 3 A ( 125 V AC ), 1 A ( 30 V DC )		
Max. carrying current	10 A	1 Form A: 10 A	10 A	1 Form A: 12 A	
		1 Form B: 3 A		1 Form B: 3 A	
Min. switching load ( reference value ) *1	100 mA 5 V DC				
Insulation resistance ( initial )		Min. 1,000 MΩ ( at 500 V DC, Measured portion is the same as the case of dielectric strength )			
Dielectric strength ( initial )	Between open contacts	1,000 V rms for 1 min ( detection current: 10 mA )	750 V rms for 1 min ( detection current: 10 mA )	1,000 V rms for 1 min ( detection current: 10 mA )	750 V rms for 1 min ( detection current: 10 mA )
	Between contact and coil	4,000 V rms for 1 min ( detection current: 10 mA )			
Surge withstand voltage ( initial ) *2	Between contact and coil	8,000 V			
Time characteristics ( initial )	Operate time	Max. 20 ms ( at rated coil voltage, at 20 °C, without bounce )			
	Release time	Max. 20 ms ( at rated coil voltage, at 20 °C, without bounce, with diode )			
Shock resistance	Functional	294 m/s <sup>2</sup> ( half-sine shock pulse: 11 ms, detection time: 10 μs )	196 m/s <sup>2</sup> ( half-sine shock pulse: 11 ms, detection time: 10 μs )	294 m/s <sup>2</sup> ( half-sine shock pulse: 11 ms, detection time: 10 μs )	196 m/s <sup>2</sup> ( half-sine shock pulse: 11 ms, detection time: 10 μs )
	Destructive	980 m/s <sup>2</sup> ( half-sine shock pulse: 6 ms )			
Vibration resistance	Functional	10 to 55 Hz ( at double amplitude of 1.6 mm, detection time: 10 μs )			
	Destructive	10 to 55 Hz ( at double amplitude of 2 mm )			
Expected life	Mechanical life	Min. 10 × 10 <sup>6</sup> ope. ( at 180 times/min )			
Conditions	Conditions for usage, transport and storage*3	Ambient temperature: -40 to +85 °C*4 ( -40 to +60 °C at our standard packing condition ) Humidity: 5 to 85 % RH ( Avoid icing and condensation )			Ambient temperature: -40 to +85 °C ( Max. 10 A ), -40 to +70 °C ( Max. 12 A/carrying at standard packing condition ) ( Allowable temperature is from -40 °C to 60 °C at our standard packing condition ) Humidity: 5 to 85 % RH ( Avoid icing and condensation )
Unit weight	Approx. 7 g				

Notes) Specifications will vary with foreign standards certification ratings.

\*1: This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

\*2: Wave is standard shock voltage of  $\pm 1.2 \times 50 \mu s$  according to JEC-212-1981

\*3: For ambient temperature, please read " GUIDELINES FOR RELAY USAGE ".

\*4: When using relays in a high ambient temperature, consider the operate voltage rise due to the high temperature ( a rise of approx. 0.4 % V for each 1 °C with 20 °C as a reference ) and use a coil impressed voltage that is within the maximum applied voltage range.

# Power Relays ( Over 2 A ) LQ RELAYS

## Expected electrical life


Condition: at 20 °C, with diode

Type		Load	Switching capacity	Number of operations
Standard type	1 Form A		5 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			10 A 125 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			5 A 250 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
	1 Form C	Form A contact	5 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			10 A 125 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			5 A 250 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
		Form B contact	3 A 125 V AC	200 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			2 A 250 V AC	200 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
			1 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
Inrush/reinforced insulation type	1 Form A		10 A 125 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )
			8 A 250 V AC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )
			5 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1.5 s: 1.5 s )
	Capacitor load	inrush 40 A peak/100 μs steady 1 A rms 250 V AC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )	
	Motor load	inrush 30 A peak/0.5 s steady 3 A rms cos φ = 0.5 250 V AC	300 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )	
Reflow soldering type	1 Form C	Form A contact	5 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )
			10 A 125 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 29 s )
			5 A 250 V AC	50 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )
	Form B contact	3 A 125 V AC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )	
		2 A 250 V AC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )	
		1 A 30 V DC	100 × 10 <sup>3</sup> ope. ( Switching frequency ON: OFF = 1 s: 9 s )	


## REFERENCE DATA

1-1. Max. switching capacity  
( Standard type: 1 Form A )


Ambient temperature : normal temperature

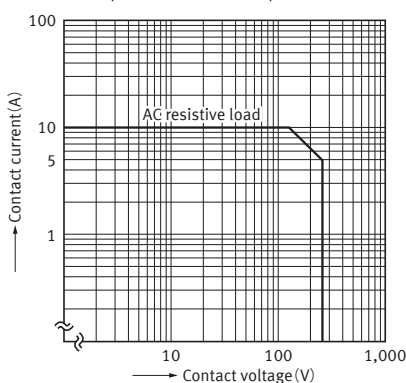

1-2. Max. switching capacity  
( Standard type: 1 Form C )

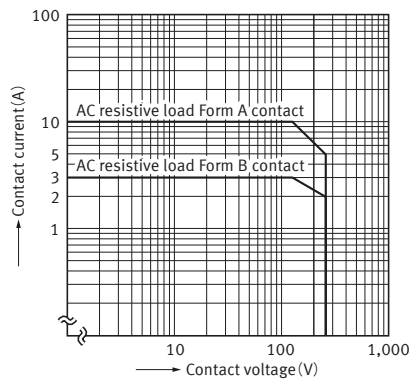


1-3. Max. switching capacity  
( Inrush/reinforced insulation type: 1 Form A )

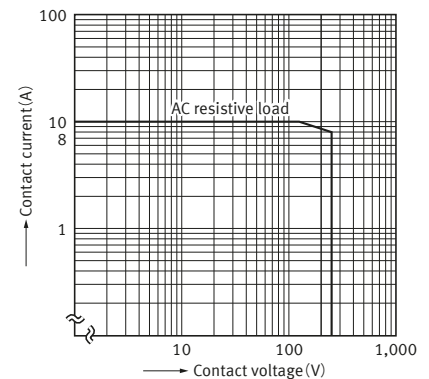


# Power Relays ( Over 2 A ) LQ RELAYS


## 2. Switching life curve ( Standard type: Form A contact )

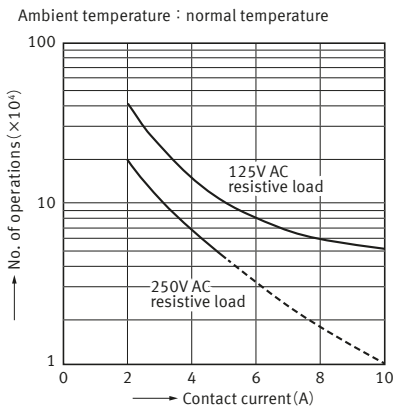


## 3-1. Coil temperature characteristics ( Standard type, Inrush/reinforced insulation type: 1 Form A )

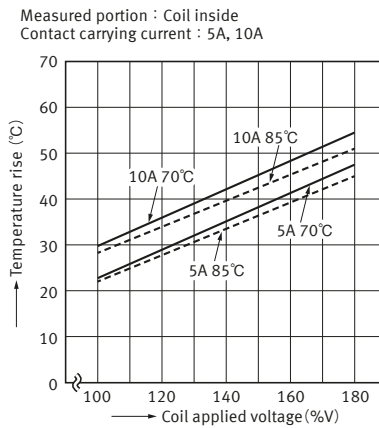


## 3-2. Coil temperature characteristics ( Standard type: 1 Form C )

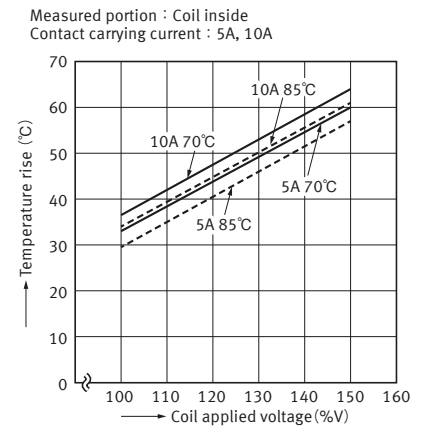


## 4-1. Ambient temperature characteristics ( Standard type: 1 Form A )

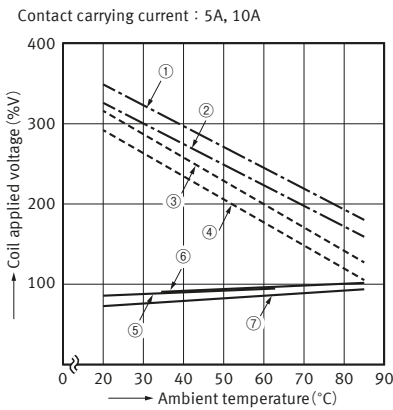

## 4-2. Ambient temperature characteristics ( Standard type: 1 Form C )

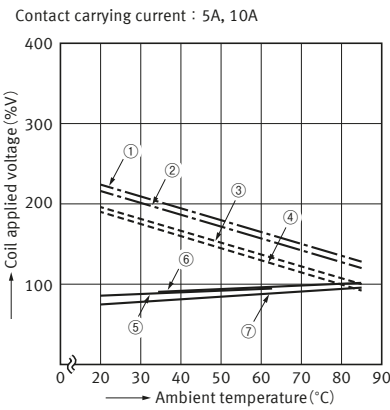

## 4-3. Ambient temperature characteristics ( Inrush/reinforced insulation type: 1 Form A )

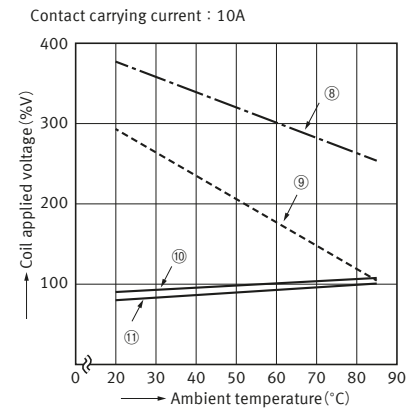

- ① Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 130°C ) ( Carrying current : 5 A )
- ② Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 130°C ) ( Carrying current : 10 A )
- ③ Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 115°C ) ( Carrying current : 5 A )
- ④ Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 115°C ) ( Carrying current : 10 A )
- ⑤ Operate voltage with a hot-start condition of 100%V on the coil ( Carrying current : 10 A )
- ⑥ Operate voltage with a hot-start condition of 100%V on the coil ( Carrying current : 5 A )
- ⑦ Operate voltage
- ⑧ Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 155°C ) ( Carrying current : 10 A )
- ⑨ Allowable ambient temperature against % coil voltage ( max. inside the coil temperature set as 115°C ) ( Carrying current : 10 A )
- ⑩ Operate voltage with a hot-start condition of 100%V On the coil ( Carrying current : 10 A )
- ⑪ Operate voltage

Note) Please contact our sales representative for details about Reflow soldering type

# Power Relays ( Over 2 A ) LQ RELAYS

## DIMENSIONS ( Unit: mm )

**CAD** The CAD data of the products with a " CAD " mark can be downloaded from our Website.


### Standard type, Inrush/reinforced insulation type

● 1 Form A

**CAD**




External dimensions

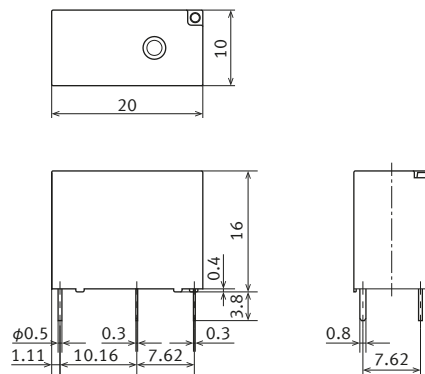


General tolerance  
 Less than 1 mm :  $\pm 0.2$   
 Min. 1 mm less than 5 mm :  $\pm 0.3$   
 Min. 5 mm :  $\pm 0.4$

Recommended PC board pattern ( BOTTOM VIEW )



Tolerance  $\pm 0.1$

Schematic ( BOTTOM VIEW )




### Standard type

● 1 Form C

**CAD**




External dimensions

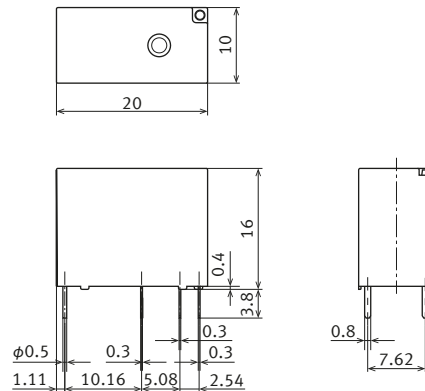


General tolerance  
 Less than 1 mm :  $\pm 0.2$   
 Min. 1 mm less than 5 mm :  $\pm 0.3$   
 Min. 5 mm :  $\pm 0.4$

Recommended PC board pattern ( BOTTOM VIEW )



Tolerance  $\pm 0.1$

Schematic ( BOTTOM VIEW )




### Reflow soldering type

● 1c

**CAD**




External dimensions

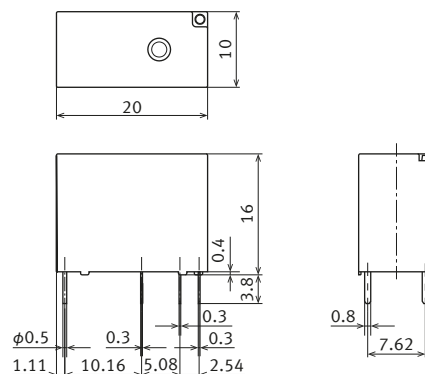

General tolerance  
 Less than 1 mm :  $\pm 0.2$   
 Min. 1 mm less than 5 mm :  $\pm 0.3$   
 Min. 5 mm :  $\pm 0.4$

Recommended PC board pattern ( BOTTOM VIEW )



Tolerance  $\pm 0.1$

Schematic ( BOTTOM VIEW )



# Power Relays ( Over 2 A ) LQ RELAYS

## SAFETY STANDARDS

Each standard may be updated at any time, so please check our Website for the latest information.

### UL/C-UL ( Approved )

#### Standard type

1 Form A ( ALQ3\*\*\*\* )

File No.	Contact rating	Operations	Ambient temperature
E43028	10 A 277 V AC General use	6 × 10 <sup>3</sup>	40 °C
	5 A 277 V AC General use	100 × 10 <sup>3</sup>	40 °C
	5 A 277 V AC General use	50 × 10 <sup>3</sup>	85 °C
	5 A 240 V AC General use	6 × 10 <sup>3</sup>	105 °C
	10 A 125 V AC General use	50 × 10 <sup>3</sup>	40 °C
	10 A 125 V AC General use	10 × 10 <sup>3</sup>	85 °C
	5 A 30 V DC General use	100 × 10 <sup>3</sup>	40 °C
	5 A 30 V DC General use	50 × 10 <sup>3</sup>	85 °C
	4 A 125 V AC Resistive	100 × 10 <sup>3</sup>	105 °C
	7 A 125 V AC Resistive	100 × 10 <sup>3</sup>	75 °C
	8.75 A 240 V AC Resistive	100 × 10 <sup>3</sup>	85 °C
	1/6 HP 277 V AC	10 <sup>3</sup>	40 °C
	1/6 HP 125 V AC	10 <sup>3</sup>	40 °C
	4 FLA/4 LRA 277 V AC	100 × 10 <sup>3</sup>	105 °C
	2 FLA/12 LRA 120 V AC	6 × 10 <sup>3</sup>	105 °C
	2.3 A 240 V AC Pilot Duty	6 × 10 <sup>3</sup>	75 °C
	1.5 A 125 V AC Pilot Duty	100 × 10 <sup>3</sup>	80 °C
	1 A 125 V AC Pilot Duty	100 × 10 <sup>3</sup>	105 °C
	1 A 240 V AC Pilot Duty	100 × 10 <sup>3</sup>	105 °C
	0.5 A 30 V DC Pilot Duty	100 × 10 <sup>3</sup>	75 °C
	2 A 120 V AC Tungsten	6 × 10 <sup>3</sup>	105 °C
	1 A 240 V AC Tungsten	6 × 10 <sup>3</sup>	75 °C
	1.5 A 24 V AC Inductive ( pf 0.35 )	500 × 10 <sup>3</sup>	25 °C
	1 A 250 V AC Inductive ( pf 0.35 )	500 × 10 <sup>3</sup>	25 °C
	1.5 A 125 V AC Inductive ( pf 0.5 )	500 × 10 <sup>3</sup>	25 °C
	10 A 277 V AC General use ( Class F only )	6 × 10 <sup>3</sup>	105 °C

\* Pilot Duty comply with UL508 conditions

#### Inrush/reinforced insulation type

1 Form A ( ALQ6F\*\*\* )

File No.	Contact rating	Operations	Ambient temperature
E43028	8 A 277 V AC General use	6 × 10 <sup>3</sup>	105 °C
	1/2 HP 250 V AC	10 <sup>3</sup>	40 °C
	10 A 125 V AC General use	6 × 10 <sup>3</sup>	105 °C
	5 A 30 V DC Resistive	6 × 10 <sup>3</sup>	105 °C

1 Form C ( ALQ1\*\*\*\* )

File No.	Contact	Contact rating	Operations	Ambient temperature
E43028	N.O.	10 A 277 V AC General use	6 × 10 <sup>3</sup>	40 °C
		5 A 277 V AC General use	100 × 10 <sup>3</sup>	40 °C
		5 A 277 V AC General use	50 × 10 <sup>3</sup>	85 °C
		10 A 125 V AC General use	50 × 10 <sup>3</sup>	40 °C
		10 A 125 V AC General use	10 × 10 <sup>3</sup>	85 °C
		5 A 30 V DC General use	100 × 10 <sup>3</sup>	40 °C
		5 A 30 V DC General use	50 × 10 <sup>3</sup>	85 °C
		5 A 240 V AC Resistive	100 × 10 <sup>3</sup>	80 °C
		1/6 HP 277 V AC	10 <sup>3</sup>	40 °C
		1/6 HP 125 V AC	10 <sup>3</sup>	40 °C
		4 FLA/ 4 LRA 277 V AC	100 × 10 <sup>3</sup>	105 °C
		3 FLA/18 LRA 240 V AC	100 × 10 <sup>3</sup>	85 °C
		1 A 240 V AC Pilot Duty	100 × 10 <sup>3</sup>	80 °C
		3 A 120 V AC Pilot Duty	100 × 10 <sup>3</sup>	85 °C
		10 A 277 V AC General use ( Class F only )	6 × 10 <sup>3</sup>	105 °C
		N.C.	3 A 125 V AC General use	100 × 10 <sup>3</sup>
	2 A 277 V AC General use		100 × 10 <sup>3</sup>	85 °C
	1 A 30 V DC General use		100 × 10 <sup>3</sup>	85 °C
	2 A 30 V DC Resistive		100 × 10 <sup>3</sup>	40 °C
	3 A 240 V AC Resistive		100 × 10 <sup>3</sup>	80 °C
	2 A 120 V AC Pilot Duty		100 × 10 <sup>3</sup>	80 °C

#### Reflow soldering type

1 Form C ( ALQ1F\*\*RS )

File No.	Contact	Contact rating	Operations	Ambient temperature
E43028	N.O.	10 A 277 V AC General use	6 × 10 <sup>3</sup>	40 °C
		5 A 277 V AC General use	100 × 10 <sup>3</sup>	40 °C
		5 A 277 V AC General use	50 × 10 <sup>3</sup>	85 °C
		10 A 125 V AC General use	50 × 10 <sup>3</sup>	40 °C
		10 A 125 V AC General use	10 × 10 <sup>3</sup>	85 °C
		5 A 30 V DC General use	100 × 10 <sup>3</sup>	40 °C
		5 A 30 V DC General use	50 × 10 <sup>3</sup>	85 °C
		5 A 240 V AC Resistive	100 × 10 <sup>3</sup>	80 °C
		1/6 HP 277 V AC	10 <sup>3</sup>	40 °C
		1/6 HP 125 V AC	10 <sup>3</sup>	40 °C
		4 FLA/ 4 LRA 277 V AC	100 × 10 <sup>3</sup>	105 °C
		3 FLA/18 LRA 240 V AC	100 × 10 <sup>3</sup>	85 °C
		1 A 240 V AC Pilot Duty	100 × 10 <sup>3</sup>	80 °C
		3 A 120 V AC Pilot Duty	100 × 10 <sup>3</sup>	85 °C
		10 A 277 V AC General use ( Class F only )	6 × 10 <sup>3</sup>	105 °C
		N.C.	3 A 125 V AC General use	100 × 10 <sup>3</sup>
	2 A 277 V AC General use		100 × 10 <sup>3</sup>	85 °C
	1 A 30 V DC General use		100 × 10 <sup>3</sup>	85 °C
	2 A 30 V DC Resistive		100 × 10 <sup>3</sup>	40 °C
	3 A 240 V AC Resistive		100 × 10 <sup>3</sup>	80 °C
	2 A 120 V AC Pilot Duty		100 × 10 <sup>3</sup>	80 °C

# Power Relays ( Over 2 A ) LQ RELAYS

## ■ CSA ( Approved )

CSA standard approved by C-UL

## ■ VDE ( Approved )

### ● Standard type

1 Form A ( ALQ 3\*\*\*\* )

File No.	Contact rating	Operations	Ambient temperature
40032836	10 A 250 V AC ( $\cos\phi = 1.0$ )	$10 \times 10^3$	85 °C
	10 A 250 V AC ( $\cos\phi = 0.4$ )	$10 \times 10^3$	85 °C
	5 A 250 V AC ( $\cos\phi = 1.0$ )	$50 \times 10^3$	85 °C
	5 A 30 V DC ( 0 ms )	$10 \times 10^3$	85 °C

### ● Inrush/reinforced insulation type

1 Form A ( ALQ6F\*\*\*\* )

File No.	Contact rating	Operations	Ambient temperature
40032836	8 A 250 V AC ( $\cos\phi = 1.0$ )	$10^3$	105 °C
	10 A 250 V AC ( $\cos\phi = 0.4$ )	$10^3$	85 °C
	5 A 30 VDC ( 0 ms )	$10^3$	105 °C

## ■ TV rating

### ● Inrush/reinforced insulation type

1 Form A ( ALQ6F\*\*\*\* )

File No.	Contact rating
E43028	TV-3

## ■ CQC ( Approved )

### ● Standard type

1 Form A ( ALQ3\*\*\*\* )

File No.	Contact rating	Operations	Ambient temperature
CQC14002108384	5 A 250 V AC ( switching frequency at 20 times/min )	$10 \times 10^3$	-40 to +85 °C

- Type of insulation ( Between contact and coil ) : Basic insulation
- Pollution degree : 2
- Impulse withstand voltage : 2,500 V
- Rated insulation voltage : 250 V
- Category of environmental protection : RTIII
- Type of interruption ( Between open contacts ) : Micro disconnection
- Mounting distance : 10 mm
- Duty factor : 50 %
- Test procedure : A
- Number of cycles for mechanical endurance:  $10 \times 10^6$

1 Form C ( ALQ 1\*\*\*\* )

File No.	Contact	Contact rating	Operations	Ambient temperature
40032836	N.O.	10 A 250 V AC ( $\cos\phi = 1.0$ )	$10 \times 10^3$	85 °C
		10 A 250 V AC ( $\cos\phi = 0.4$ )	$10 \times 10^3$	85 °C
		5 A 250 V AC ( $\cos\phi = 1.0$ )	$50 \times 10^3$	85 °C
		5 A 30 V DC ( 0 ms )	$10 \times 10^3$	85 °C
	N.C.	3 A 250 V AC ( $\cos\phi = 0.4$ )	$10 \times 10^3$	85 °C

### ● Reflow soldering type

1 Form C ( ALQ1F\*\*RS )

File No.	Contact	Contact rating	Operations	Ambient temperature
40032836	N.O.	10 A 250 V AC ( $\cos\phi = 1.0$ )	$10 \times 10^3$	85 °C
		10 A 250 V AC ( $\cos\phi = 0.4$ )	$10 \times 10^3$	85 °C
		5 A 250 V AC ( $\cos\phi = 1.0$ )	$50 \times 10^3$	85 °C
		5 A 30 V DC ( 0 ms )	$10 \times 10^3$	85 °C
	N.C.	3 A 250 V AC ( $\cos\phi = 0.4$ )	$10 \times 10^3$	85 °C

1 Form C ( ALQ1\*\*\*\* )

File No.	Contact	Contact rating	Operations	Ambient temperature
CQC14002108384	N.O.	5 A 250 V AC ( switching frequency at 20 times/min )	$10 \times 10^3$	-40 to +85 °C
	N.C.	2 A 250 V AC ( switching frequency at 20 times/min )	$10 \times 10^3$	-40 to +85 °C

- Type of insulation ( Between contact and coil ) : Basic insulation
- Pollution degree : 2
- Impulse withstand voltage : 2,500 V
- Rated insulation voltage : 250 V
- Category of environmental protection : RTIII
- Type of interruption ( Between open contacts ) : Micro disconnection
- Mounting distance : 10 mm
- Duty factor : 50 %
- Test procedure : A
- Number of cycles for mechanical endurance:  $10 \times 10^6$

# Power Relays ( Over 2 A ) LQ RELAYS

## INSULATION CHARACTERISTICS ( IEC61810-1 )

Item	Characteristics	
Clearance/Creepage distance ( IEC61810-1 )	Standard type, Reflow soldering type	1 Form A: Min. 4.0 mm/Min. 4.0 mm, 1 Form C: Min. 3.5 mm/Min. 3.5 mm
	Inrush/ reinforced insulation type	Min. 5.5 mm/5.5 mm
Category of protection ( IEC61810-1 )	Standard type, Inrush/reinforced insulation type	RT III
	Reflow soldering type	RT II
Tracking resistance ( IEC60112 )	PTI 175	
Insulation material group	IIIa	
Over voltage category	III	
Rated voltage	250 V	
Pollution degree	2	
Type of insulation ( Between contact and coil )	Standard type, Reflow soldering type	Basic insulation
	Inrush/ reinforced insulation type	Reinforced insulation
Type of insulation ( Between open contacts )	Micro disconnection	

Note) Standard type : Actual value  
Inrush/reinforced insulation type: EN/IEC VDE certified.

## GUIDELINES FOR USAGE

■ For cautions for use, please read " GUIDELINES FOR RELAY USAGE ".  
[https://industry.panasonic.com/global/en/products/control/relay/cautions\\_use](https://industry.panasonic.com/global/en/products/control/relay/cautions_use)


### ■ Cautions for usage of LQ relays

#### ● SOLDERING ( Reflow soldering type )

In case of automatic soldering, following conditions should be observed.

[Condition of I.R.S ( recommended ) ]

recommended condition : reflow; 1 time, measurement area ; PC board surface where the relay is soldered

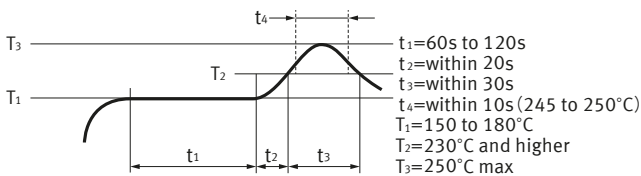

#### • Caution


Even if used in the recommended condition, the relay may be affected by heat stress caused by a busy layout, reflow heating process, PC board type ( metal etc. ) , and so on. Therefore, please check the quality and reliability under the actual worst condition.

#### ● Usage, transport and storage conditions ( Reflow soldering type )

- 1) Temperature  
 -40 to +85 °C ( 10 A or less )  
 -40 to +70 °C ( 12 A or less/carrying )
- 2) Humidity  
 5 to 85 % RH ( Avoid icing and condensation )

Note) The humidity range varies with the temperature. Use within the range indicated in the graph.

- 3) Atmospheric pressure  
 86 to 106 kPa

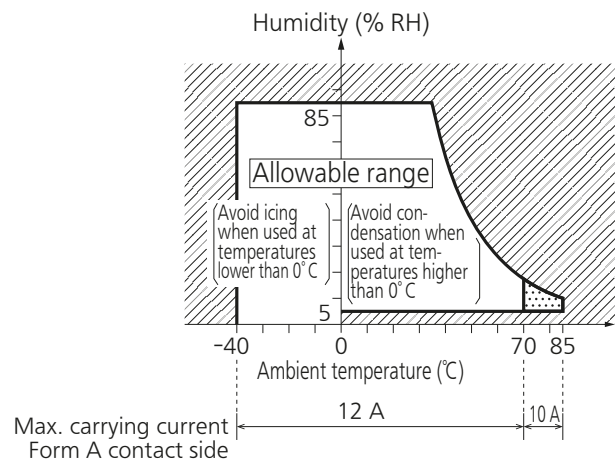

- For cautions for use, please read " GUIDELINES FOR RELAY USAGE ".  
[https://industry.panasonic.com/global/en/products/control/relay/cautions\\_use](https://industry.panasonic.com/global/en/products/control/relay/cautions_use)

## Precautions for Coil Input

### ■ Long term current carrying

A circuit that will be carrying a current continuously for long periods without relay switching operation. ( circuits for emergency lamps, alarm devices and error inspection that, for example, revert only during malfunction and output warnings with form B contacts ) Continuous, long-term current to the coil will facilitate deterioration of coil insulation and characteristics due to heating of the coil itself. For circuits such as these, please use a magnetic-hold type latching relay. If you need to use a single stable relay, use a sealed type relay that is not easily affected by ambient conditions and make a failsafe circuit design that considers the possibility of contact failure or disconnection.

### ■ DC Coil operating power

Steady state DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5 %. However, please check with the actual circuit since the electrical characteristics may vary. The rated coil voltage should be applied to the coil and the set/reset pulse time of latching type relay differs for each relays, please refer to the relay's individual specifications.

### ■ Coil connection

When connecting coils of polarized relays, please check coil polarity ( + , - ) at the internal connection diagram ( Schematic ). If any wrong connection is made, it may cause unexpected malfunction, like abnormal heat, fire and so on, and circuit do not work. Avoid impressing voltages to the set coil and reset coil at the same time.

### ■ Maximum allowable voltage and temperature rise

Proper usage requires that the rated coil voltage be impressed on the coil. Note, however, that if a voltage greater than or equal to the maximum continuous voltage is impressed on the coil, the coil may burn or its layers short due to the temperature rise. Furthermore, do not exceed the usable ambient temperature range listed in the catalog.

#### ● Operate voltage change due to coil temperature rise

In DC relays, after continuous passage of current in the coil, if the current is turned OFF, then immediately turned ON again, due to the temperature rise in the coil, the operate voltage will become somewhat higher. Also, it will be the same as using it in a higher temperature atmosphere. The resistance/temperature relationship for copper wire is about 0.4 % for 1 °C, and with this ratio the coil resistance increases. That is, in order to operate of the relay, it is necessary that the voltage be higher than the operate voltage and the operate voltage rises in accordance with the increase in the resistance value. However, for some polarized relays, this rate of change is considerably smaller.

## Ambient Environment

### ■ Usage, Transport, and Storage Conditions

During usage, storage, or transportation, avoid locations subjected to direct sunlight and maintain normal temperature, humidity and pressure conditions.

#### ●Temperature/Humidity/Pressure


When transporting or storing relays while they are tube packaged, there are cases the temperature may differ from the allowable range. In this case be sure to check the individual specifications.

Also allowable humidity level is influenced by temperature, please check charts shown below and use relays within mentioned conditions. ( Allowable temperature values differ for each relays, please refer to the relay's individual specifications. )

##### 1) Temperature:

The tolerance temperature range differs for each relays, please refer to the relay's individual specifications

##### 2) Humidity: 5 to 85 % RH

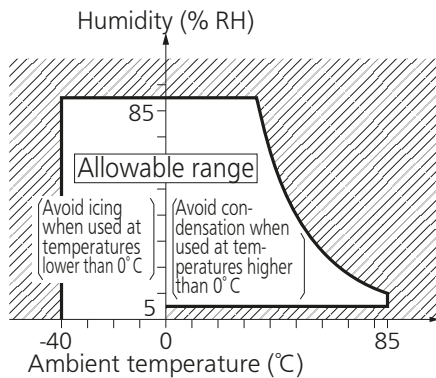

##### 3) Pressure: 86 to 106 kPa

#### ●Dew condensation

Condensation occurs when the ambient temperature drops suddenly from a high temperature and humidity, or the relay is suddenly transferred from a low ambient temperature to a high temperature and humidity.

Condensation causes the failures like insulation deterioration, wire disconnection and rust etc.

Panasonic Industry Co., Ltd. does not guarantee the failures caused by condensation.

The heat conduction by the equipment may accelerate the cooling of device itself, and the condensation may occur.

Please conduct product evaluations in the worst condition of the actual usage. ( Special attention should be paid when high temperature heating parts are close to the device. Also please consider the condensation may occur inside of the device. )

#### ●Icing

Condensation or other moisture may freeze on relays when the temperature become lower than 0 °C. This icing causes the sticking of movable portion, the operation delay and the contact conduction failure etc. Panasonic Industry Co., Ltd. does not guarantee the failures caused by the icing.

The heat conduction by the equipment may accelerate the cooling of relay itself and the icing may occur.

Please conduct product evaluations in the worst condition of the actual usage.

#### ●Low temperature and low humidity

The plastic becomes brittle if the relay is exposed to a low temperature, low humidity environment for long periods of time.

#### ●High temperature and high humidity

Storage for extended periods of time ( including transportation periods ) at high temperature or high humidity levels or in atmospheres with organic gases or sulfide gases may cause a sulfide film or oxide film to form on the surfaces of the contacts and/or it may interfere with the functions. Check out the atmosphere in which the units are to be stored and transported.

#### ●Package

In terms of the packing format used, make every effort to keep the effects of moisture, organic gases and sulfide gases to the absolute minimum.

#### ●Silicon

When a source of silicone substances ( silicone rubber, silicone oil, silicone coating materials and silicone filling materials etc. ) is used around the relay, the silicone gas ( low molecular siloxane etc. ) may be produced.

This silicone gas may penetrate into the inside of the relay. When the relay is kept and used in this condition, silicone compound may adhere to the relay contacts which may cause the contact failure. Do not use any sources of silicone gas around the relay ( Including plastic sealed types ).

#### ●NOx Generation

When relay is used in an atmosphere high in humidity to switch a load which easily produces an arc, the NOx created by the arc and the water absorbed from outside the relay combine to produce nitric acid.

This corrodes the internal metal parts and adversely affects operation.

Avoid use at an ambient humidity of 85 % RH or higher ( at 20 °C ). If use at high humidity is unavoidable, please contact our sales representative.

## Others

### ■ Cleaning

- Although the environmentally sealed type relay ( plastic sealed type, etc. ) can be cleaned, avoid immersing the relay into cold liquid ( such as cleaning solvent ) immediately after soldering. Doing so may deteriorate the sealing performance.
- Cleaning with the boiling method is recommended ( The temperature of cleaning liquid should be 40 °C or lower ). Avoid ultrasonic cleaning on relays. Use of ultrasonic cleaning may cause breaks in the coil or slight sticking of the contacts due to ultrasonic energy.

Please refer to " **the latest product specifications** " when designing your product.

- Requests to customers:

<https://industry.panasonic.com/global/en/salespolicies>

■ Global Sales Network Information: [industry.panasonic.com/global/en/salesnetwork/globalnetwork](https://industry.panasonic.com/global/en/salesnetwork/globalnetwork)

---

**Panasonic**  
INDUSTRY

**Panasonic Industry Co., Ltd.**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industry.panasonic.com](https://industry.panasonic.com)