SEIKO EPSON CORPORATION

# Programmable Clock OSC SG-8101CG

Product name SG-8101CG 96.000000 MHz TCHPB
Product Number / Ordering code X1G0051810036xx
Please refer to the 8.Packing information about xx (last 2 digits)

Output waveform CMOS
Pb free / Complies with EU RoHS directive
Reference weight Typ. 13 mg

## 1.Absolute maximum ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions / Remarks |
|---|---|---|---|---|---|---|
| Maximum supply voltage | Vcc-GND | -0.3 | - | +4.0 | V | - |
| Storage temperature | T_stg | -40 | - | +125 | ºC | Stored as bare product after unpacking |
| Input voltage | Vin | GND-0.5 | - | Vcc+0.3 | V | ST or OE terminal |


## 2.Specifications(characteristics)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions / Remarks |
|---|---|---|---|---|---|---|
| Output frequency | f0 | | 96.000000 | | MHz | |
| Supply voltage | Vcc | 1.62 | - | 3.63 | V | Typ. 1.8V / 2.5V / 3.3V |
| Operating temperature | T_use | -40 | - | +105 | ºC | - |
| Frequency tolerance | f_tol | -20 | - | +20 | $x10^{-6}$ | T_use : -40 to +105℃ |
| Current consumption | Icc | - | - | 5.9 | mA | Vcc=3.3V Typ., No load |
| Stand-by current | I_std | - | - | - | µA | - |
| Disable current | I_dis | - | - | 3.5 | mA | Vcc=3.3V Typ., OE=GND |
| Symmetry | SYM | 45 | - | 55 | % | 50%Vcc, L_CMOS=<15pF |
| Output voltage | $V_{OH}$ | 90%Vcc | - | - | V | - |
| | $V_{OL}$ | - | - | 10%Vcc | V | - |
| Output load condition | L_CMOS | - | - | 15 | pF | CMOS Load |
| Input voltage | $V_{IH}$ | 70%Vcc | - | - | V | OE Terminal |
| | $V_{IL}$ | - | - | 30%Vcc | V | OE Terminal |
| Rise time | $t_r$ | - | - | 3 | ns | 20% to 80%Vcc,L_CMOS=15pF |
| Fall time | tf | - | - | 3 | ns | 20% to 80%Vcc,L_CMOS=15pF |
| Disable time | t_stp | - | - | 1 | µs | Measured from the time OE or ST pin crosses 30%Vcc |
| Enable time | t_sta | - | - | 1 | µs | Measured from the time OE pin crosses 70%Vcc |
| Resum time | t_res | - | - | - | ms | - |
| Start-up time | t_str | - | - | 3 | ms | Measured from the time Vcc reaches its rated minimum value, 1.62V |
| Frequency aging | f_age | - | - | - | $x10^{-6}$/Year | Included in Frequency tolerance First year |




Downloaded from Arrow.com.

## 3.Timing chart

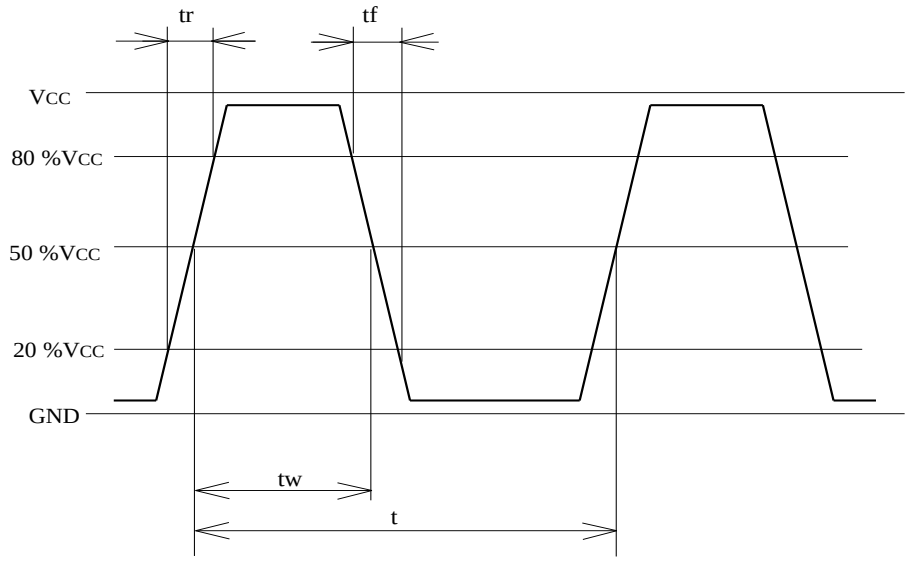



## 4.Test circuit

1) Waveform observation

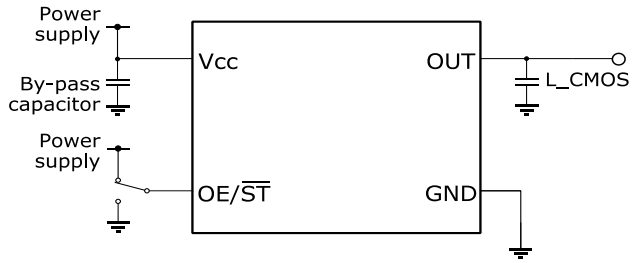


2) Current consumption

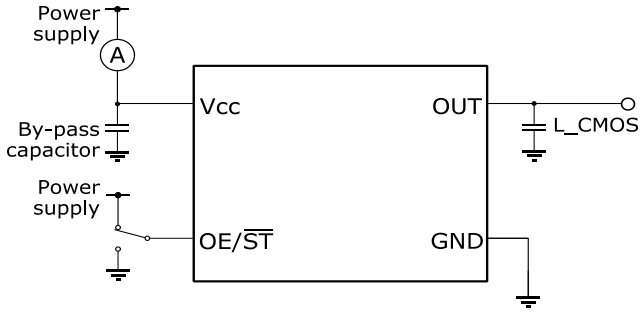


* Current consumption under the disable function should be OE = GND
Current consumption under the standby function should be ST = GND.


3) Measurement conditions

(1) L_CMOS includes probe capacitance.
(2) Mount a by-pass capacitor (approx. 0.01 to 0.1 µF) near the mains terminals of the oscillator (between Vcc and GND)



Downloaded from Arrow.com.

## 5.External dimensions (Unit: mm)

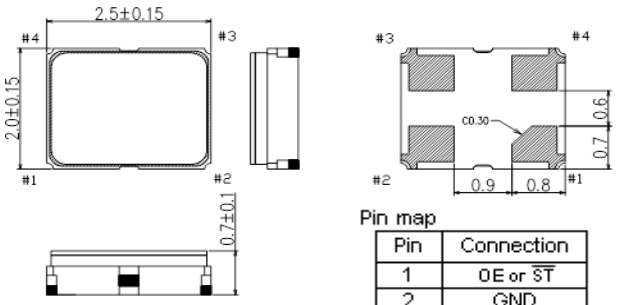



Pin map

| Pin | Connection |
|---|---|
| 1 | OE or $\overline{ST}$ |
| 2 | GND |
| 3 | OUT |
| 4 | Vcc |

OE Pin = "H" : Specified frequency output.
OE Pin = "L" : Output is low level (weak pull - down)
ST Pin = "H" : Specified frequency output.
ST Pin = "L" : Output is low level (weak pull - down), oscillation stops.


## 6.Footprint(Recommended) (Unit: mm)

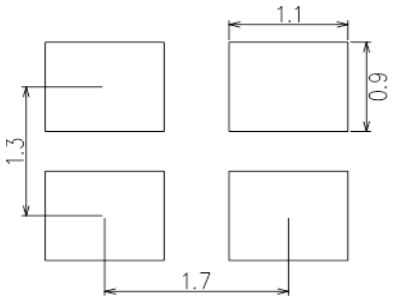


In order to achieve optimum jitter performance, the 0.1 µF capacitor between VCC and GND should be placed. It is also recommended that the capacitors are placed on the device side of the PCB, as close to the device as possible and connected together with short wiring pattern.

## 7.Reflow profile

Reflow condition (Follow of JEDEC STD-020D.1)

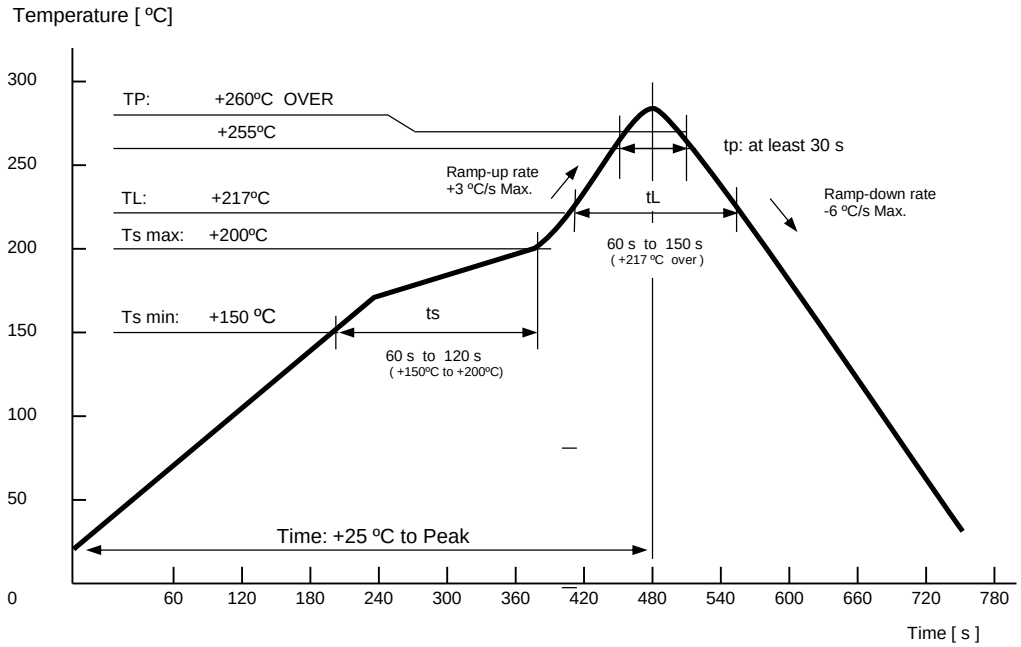


## 8.Packing information

[ 1 ]Product number last 2 digits code(xx) description The recommended code is "00"

X1G0051810036xx

| Code | Condition | Code | Condition |
|---|---|---|---|
| 01 | Any Q'ty vinyl bag(Tape cut) | 14 | 1000pcs / Reel |
| 11 | Any Q'ty / Reel | 15 | 2000pcs / Reel |
| 12 | 250pcs / Reel | 00 | 3000pcs / Reel |



Downloaded from Arrow.com.

[ 2 ] Taping specification


Subject to EIA-481 & IEC-60286

(1) Tape dimensions

Material of the Carrier Tape : PS

Material of the Top Tape : PET


Unit: mm

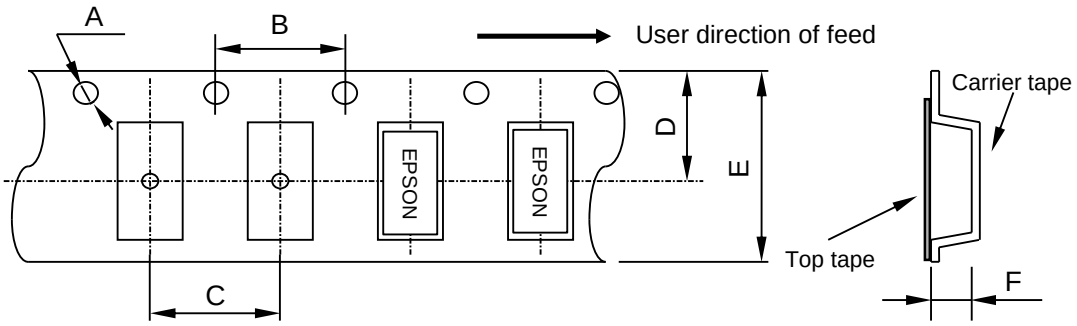


| Symbol | A | B | C | D | E | F |
|---|---|---|---|---|---|---|
| Value | Φ1.5 | 4.0 | 4.0 | 5.25 | 8.0 | 1.15 |

(2) Reel dimensions

Material of the Reel : PS

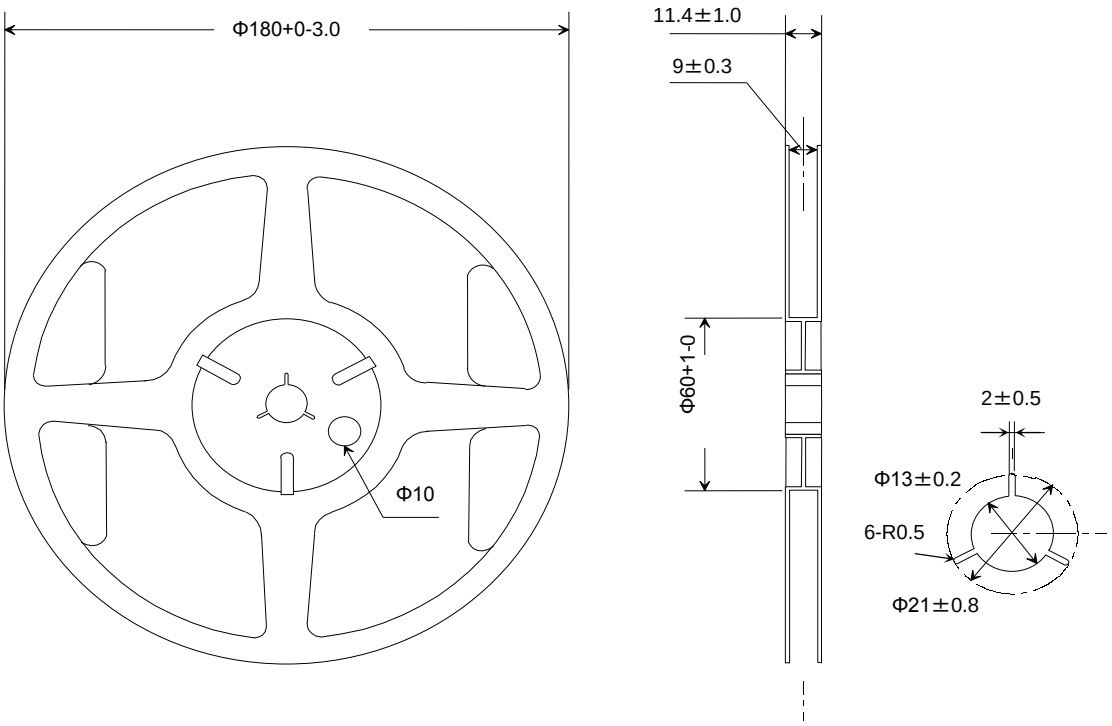


Form and Size of reel window shows are one of the example



Downloaded from Arrow.com.

## 9.Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data,circuitry, software, usage, etc. written in this material is intended for reference only.
  Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party.
  This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you
  would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require
  extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
  / Space equipment (artificial satellites, rockets, etc.)
  / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.)
  / Medical instruments to sustain life
  / Submarine transmitters
  / Power stations and related
  / Fire work equipment and security equipment
  / Traffic control equipment
  / And others requiring equivalent reliability.

## 10.Contact us

http://www5.epsondevice.com/en/contact/



Downloaded from Arrow.com.