



240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240 series**




(XTR-240-xx)



(XTR-240-xxLA)



(XTR-240-xxPI)

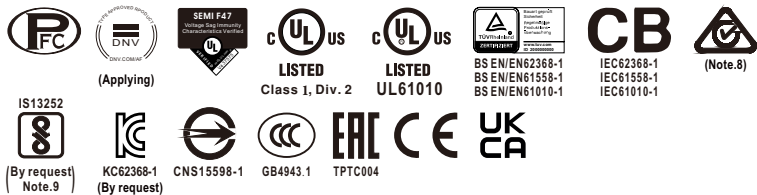


■ Features

- Three-Phase 320 ~ 600Vac wide range input, 600 ~ 700Vac surge input for 1 sec. occasionally (Dual phase operation possible)
- Global certificates in multi-fields(ITE 62368-1,Industrial 61558-1/-2-16,61010) & Marine DNV,SEMI47,C1D2 HazLoc approved
- 48mm Ultra slim width
- High efficiency up to 93.5% and no load power dissipation<2.5W
- 150% Peak Power capability
- Built-in constant current limiting circuit
- Current sharing up to 960W(3+1) for parallel use (By request)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+85°C wide range operation temperature (>+60°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Ultra low inrush current < 10A
- Built-in ORing FET (By request)
- Tool free terminal block (LA type)
- Conformal coating
- Can be installed on DIN Rail TS-35/7.5 or 15
- 5 years warranty

■ Description

The XTR-240 series is a 240W AC/DC 3Ø 320~600Vac input ultra slim industrial high-reliability DIN rail power. Key features of this series include a narrow 48 mm casing, optimizing system installation space, it boasts a maximum efficiency of 93.5% and a low standby power consumption <2.5W for energy savings and carbon reduction. It provides constant current with up to 150% peak power; fanless design , ultra-wide operating temperature range of -40 to +85°C (up to +60°C at full load); OVCIII compliance; parallel function capability up to 960W(By request);ultra-low inrush current of <10A; built-in DC OK and ORing FET(optional) ; internal PCB coating offers basic moisture and dust protection, and it has multiple terminal blocks for selection.With comprehensive protection functions, complete safety certifications, and a 5-years warranty, the XTR-240 series is a compact, high-performance, and highly reliable DIN rail power supply.

■ Model Encoding

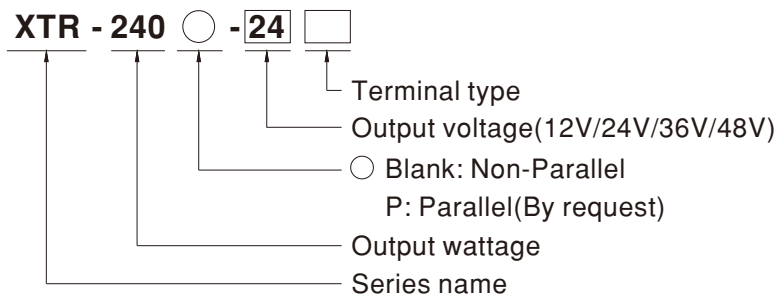

Terminal Type Options			Note
Blank	Screw Terminal		In stock
LA	Lever-Actuated		In stock
PI	Push In		In stock



240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

SPECIFICATION		XTR-240○-12□	XTR-240○-24□	XTR-240○-36□	XTR-240○-48□
		○ =Blank, P □ =Blank, LA, PI			
OUTPUT					
DC VOLTAGE		12V	24V	36V	48V
RATED CURRENT		15A	10A	6.66A	5A
CURRENT RANGE		0 ~ 15A	0 ~ 10A	0 ~ 6.66A	0 ~ 5A
RATED POWER		180W	240W	239.8W	240W
PEAK	CURRENT(5 sec.)	22.5A	15A	10A	7.5A
	POWER(5 sec.)	270W	360W	360W	360W
RIPPLE & NOISE (max.) Note.2		100mVp-p	100mVp-p	120mVp-p	120mVp-p
VOLTAGE ADJ. RANGE		12 ~ 15V	24 ~ 29V	36 ~ 42V	48 ~ 55V
VOLTAGE TOLERANCE Note.3		±1.0%	±1.0%	±1.0%	±1.0%
LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%
LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%
SETUP, RISE TIME		2000ms, 60ms/400Vac 1500ms, 60ms/500Vac at full load			
HOLD UP TIME (Typ.)		20ms / 400Vac 40ms / 500Vac at full load			
INPUT					
VOLTAGE RANGE Note.4		Three-Phase 320 ~ 600Vac 450 ~ 800Vdc (Dual phase operation possible in connecting L1,L3,FG or L2,L3,FG,L3 is DC+)			
NO LOAD POWER CONSUMPTION (Typ.)		2.5W/400Vac	2.5W/400Vac	2.5W/400Vac	2.5W/400Vac
FREQUENCY RANGE		47 ~ 63Hz			
POWER FACTOR (Typ.)		PF ≥ 0.53/400Vac PF ≥ 0.52/500Vac at full load			
EFFICIENCY (Typ.)		88.7%	92.5%	92.5%	93.5%
AC CURRENT (Typ.)		0.69A/400Vac 0.6A/500Vac			
INRUSH CURRENT (Typ.)		COLD START 10A/400Vac			
LEAKAGE CURRENT		<2mA / 530Vac			
PROTECTION					
OVERLOAD		105%~150% rated output power for more than 5 sec then constant current limiting without shutdown at rate current when Vo=30%~100%			
OVER VOLTAGE		15 ~ 18V	30 ~ 36V	45 ~ 54V	56 ~ 65V
		Hiccup mode , recovers automatically after fault condition is removed			
OVER TEMPERATURE		Shut down o/p voltage or hiccup mode, recovers automatically after temperature goes down			
FUNCTION					
PARALLEL(Optional)		Up to 960W (3+1), please refer to Function Manual for more details			
DC OK RELAY CONTACT		Relay Contact Ratings (max.):30Vdc/1A, 30Vac/0.5A resistive load			
ENVIRONMENT					
WORKING TEMP. Note.5		-40 ~ +85℃ (Refer to "Derating Curve")			
WORKING HUMIDITY		20 ~ 95% RH non-condensing			
STORAGE TEMP., HUMIDITY		-40 ~ +85℃, 10 ~ 95% RH non-condensing			
TEMP. COEFFICIENT		±0.03%/℃ (0 ~ 60℃)			
VIBRATION		Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			

File Name:XTR-240-SPEC 2026-06-01




240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series



SPECIFICATION		XTR-240○-12□	XTR-240○-24□	XTR-240○-36□	XTR-240○-48□
		○=Blank, P □=Blank, LA, PI			
SAFETY & EMC		Note.7&8&9			
SAFETY STANDARDS	CB	IEC 62368-1, IEC 61558-1/2-16, IEC 61010-1/-2-201			
	TUV	BS EN/EN 62368-1, BS EN /EN 61558-1/-2-16, BS EN/EN 61010-1/-2-201			
	UL	UL121201/CSA C22.2 NO.213.17 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4; UL/CUL 61010-1/-2-201			
	CCC	GB4943.1			
	BSMI	CNS15598-1			
	EAC	TPTC004			
	Marine DNV SEMI F47	approved			
KC/BIS	KC 62368-1 and BIS IS 13252 (Part 1) certified, No stock,contact sales by request				
OVER VOLTAGE CATEGORY	Note.6	IEC/EN 61558-1/-2-16	(OVC III, altitude up to 2000m)		
		IEC/EN/UL 61010-1/-2-201	(OVC II, altitude up to 5000m)		
		IEC/EN 62368-1	(OVC II, altitude up to 5000m)		
SAFETY EXTRA-LOW VOLTAGE(SELV)		IEC/EN 61558-2-16	(SELV)		
		IEC/EN 62368-1	(SELV/ ES1 12V/24V/36V)		
WITHSTAND VOLTAGE		I/P-O/P:4.87KVac I/P-FG:2.5KVac O/P-FG:0.5KVac O/P-DC OK:0.5KVac			
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH			
EMC EMISSION	Parameter	Standard			Test Level / Note
	Conducted	BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832			Class B
	Radiated	BS EN/EN55032(CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832			Class B
	Harmonic Current	BS EN/EN61000-3-2			Class A
	Voltage Flicker	BS EN/EN61000-3-3			-----
EMC IMMUNITY	BS EN/EN55035 , BS EN/EN61204-3 , BS EN/EN61000-6-2:2005 , BS EN/EN IEC61000-6-2:2019, KS C 9835,SEMI F47 tested at 200Vac				
	Parameter	Standard		Test Level / Note	
	ESD	BS EN/EN61000-4-2		Level 4, 15KV air ; Level 4, 8KV contact	
	Radiated Field	BS EN/EN61000-4-3		Level 3, 10V/m ; criteria A	
	EFT / Burst	BS EN/EN61000-4-4		Level 4, 4KV ; criteria A	
	Surge	BS EN/EN61000-4-5		Level 4, 2KV / Line-Line, Level 4, 4KV/ Line-Earth	
	Conducted	BS EN/EN61000-4-6		Level 3, 10V/m ; criteria A	
	Magnetic Field	BS EN/EN61000-4-8		Level 4, 30A/m ; criteria A	
	Voltage Dips and Interruptions	BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods> 95% interruptions 250 periods	
OTHERS					
MTBF	1432.3K hrs min. Telcordia SR-332(Bellcore) ; 191.5K hrs min. MIL-HDBK-217F (25°C)				
DIMENSION	48*125.2*125mm (W*H*D)				
PACKING	990g ; 12pcs/12.9Kg/1.16CUFT				
NOTE					
1. All parameters NOT specially mentioned are measured at 400Vac input, rated load and 25°C of ambient temperature.					
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.					
3. Tolerance : includes set up tolerance, line regulation and load regulation.					
4. Dual phase operation is allowed under certain derating to output load. Please refer to derating curves for details.					
5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.					
6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).					
7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)					
8. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable. The use of the RCM mark complies with AS/NZS 4417.1.					
9. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information.					
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					

File Name:XTR-240-SPEC 2026-06-01

■ Block Diagram

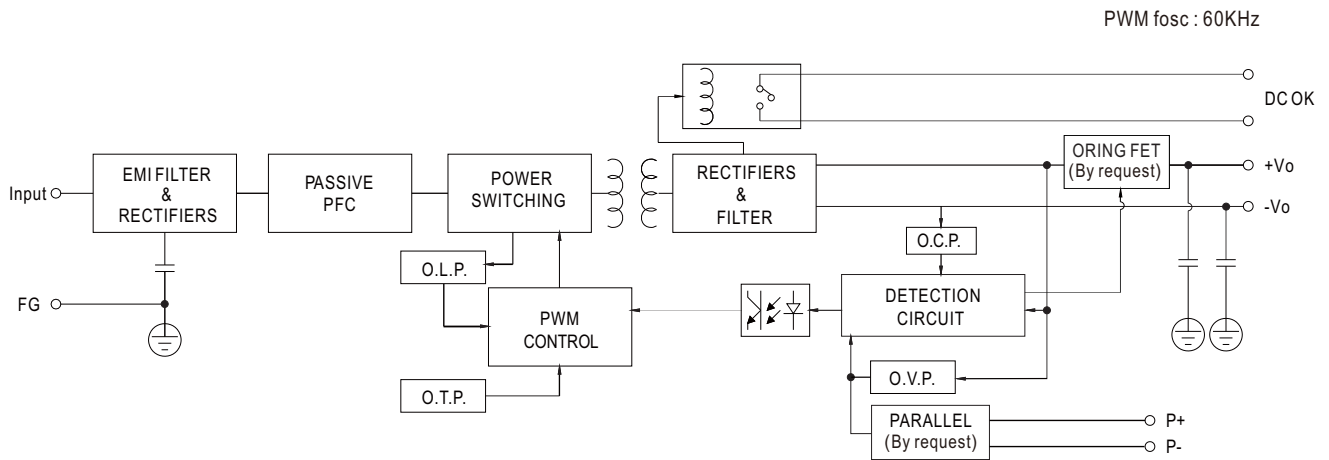


■ Derating Curve

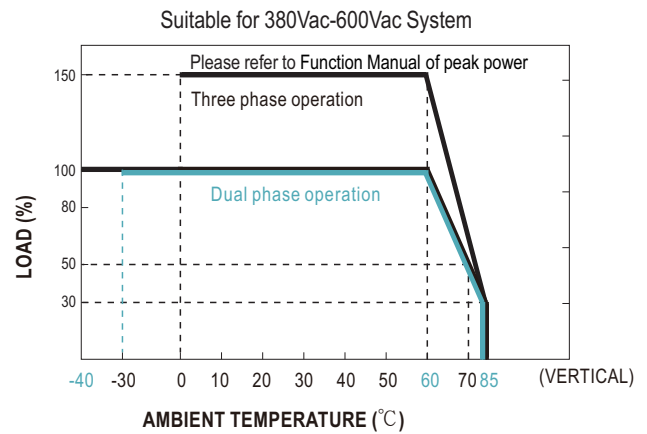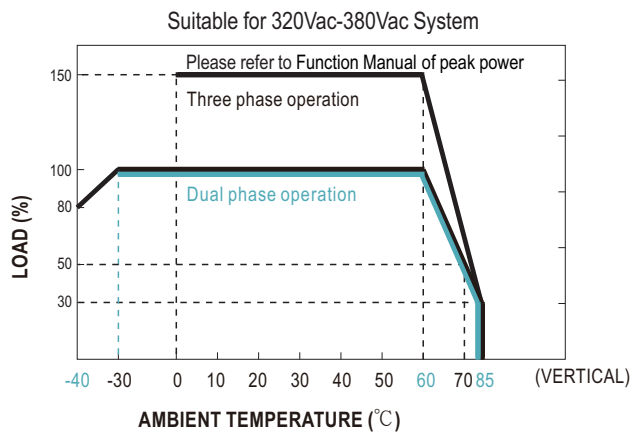

Note : Dual phase operating temperature is between -30°C~+85°C.

■ Output derating VS input voltage

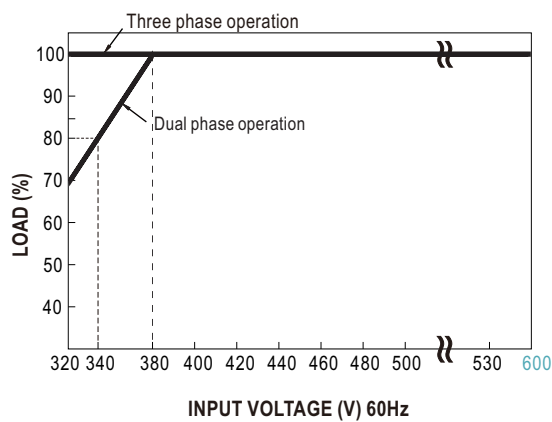

Note : When ambient temperature is between -30°C~-10°C and unit is operated in dual-phase input mode :
 - At dual-phase input 320~380Vac, power supply can be loaded but might experience hiccup at cold start for 5~10 seconds.

■ Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

P_{av} : Average output power (W)


P_{pk} : Peak output power (W)

P_{npk} : Non-peak output power (W)


P_{rated} : Rated output power (W)

t : Peak power width (sec)

T : Period (sec)

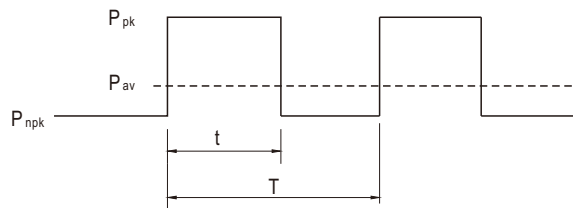

— 3Ø 320 ~ 600Vac

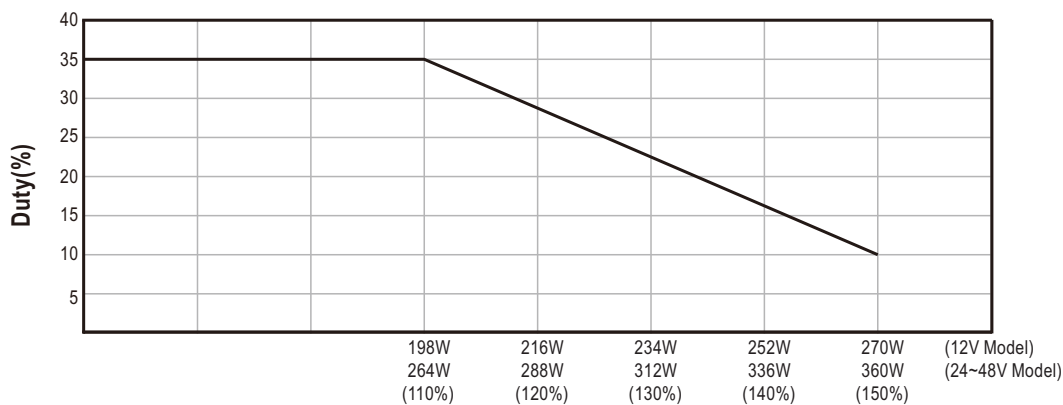

Peak output power (W)

For example (24V model) :

$V_{in} = 400V$ $\text{Duty}_{max} = 10\%$

$P_{av} = P_{rated} = 240W$

$P_{pk} = 360W$

$t \leq 5 \text{ sec}$

$T \geq \frac{5 \text{ sec}}{10\%} \geq 50 \text{ sec}$

$$P_{npk} \leq \frac{T P_{av} - t P_{pk}}{T-t}$$



$P_{npk} \leq 226W$



240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

■ Function Manual


Pin No.	Function	Description
1,2	DC OK	Contact close : PSU turns ON/DC_OK ; Contact open : PSU turns OFF/DC_fail; Contact ratings (max.): 30Vdc/1A ,30Vac/0.5A resistive load.
3	P+ (By request)	Current sharing signal. When units are connected in parallel, the P+ pins of the units should be connected mutually to allow current balance between units.
4	P- (By request)	Current sharing signal. When units are connected in parallel, the P- pins of the units should be connected mutually to allow current balance between units. P- Signal is internally connected to -Vo.

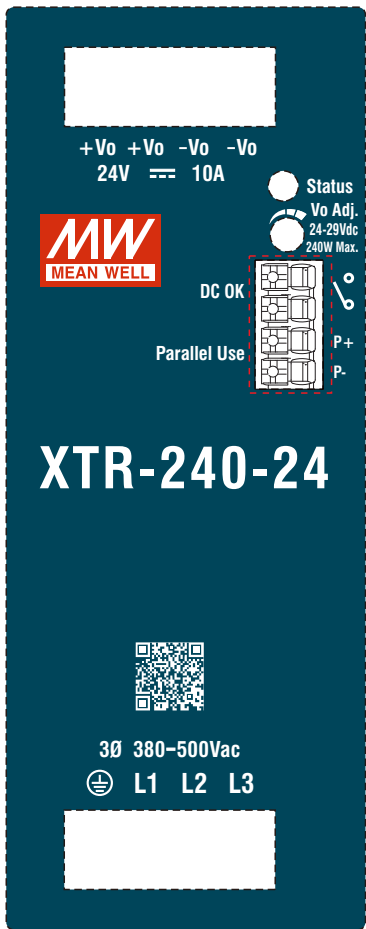

1.Parallel Use (By request)

XTR-240 has the built-in active current sharing function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :



- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 0.2V.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (6) When in parallel operation, the minimum output load should be greater than 5% of total output load. (Min. load >5% rated current per unit x number of unit)
- (7) P+ and P- lines should be twisted in pairs

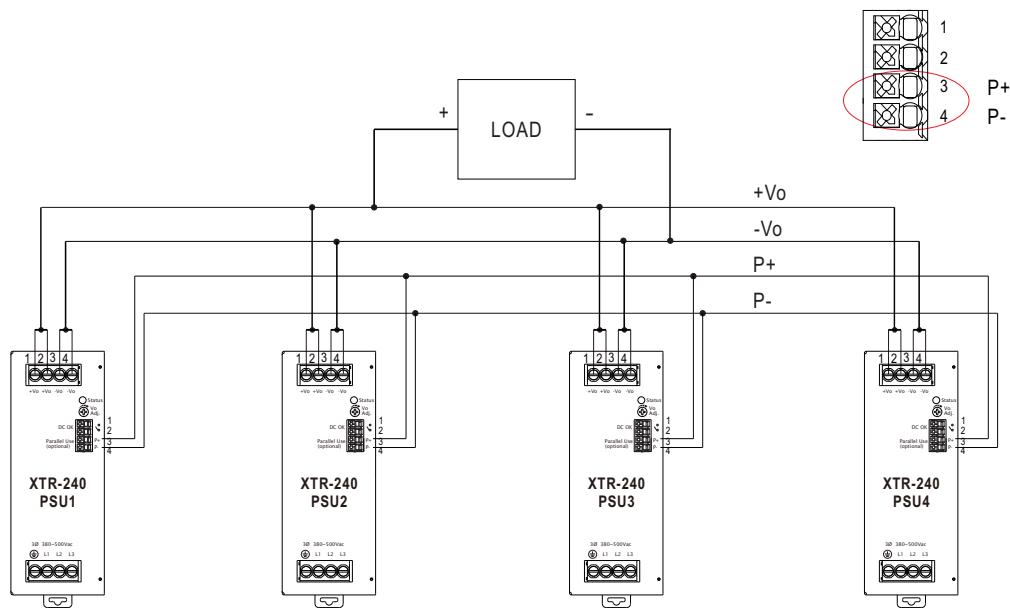

※ Please contact MEAN WELL for more details.

2.DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact ratings (max.)	30Vdc/1A ,30Vac/0.5A resistive load.

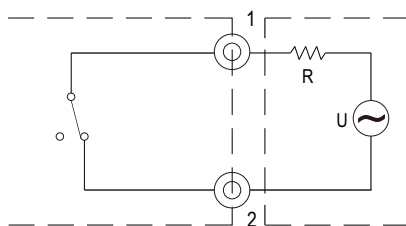


External voltage source (U) and resistor (R)
(The max. Sink is 30Vdc/1A,30Vac/0.5A)

Internal circuit of DC_OK, via relay contact

3. Protection Against Inverse Reverse From The Load (By request)

Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load.

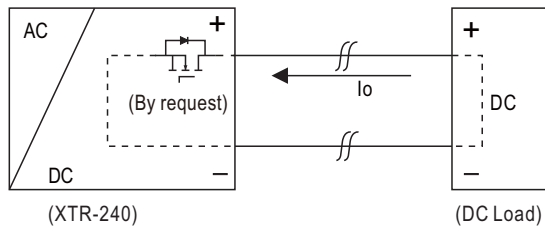


PSU'S ORing FET turn OFF voltage	
MODEL	Max. allowable reverse voltage
XTR-240-12	<16V
XTR-240-24	<35V
XTR-240-36	<50V
XTR-240-48	<63V

Mechanical Specification

(Unit:mm , Tolerance ± 1 mm)

Case No. 303

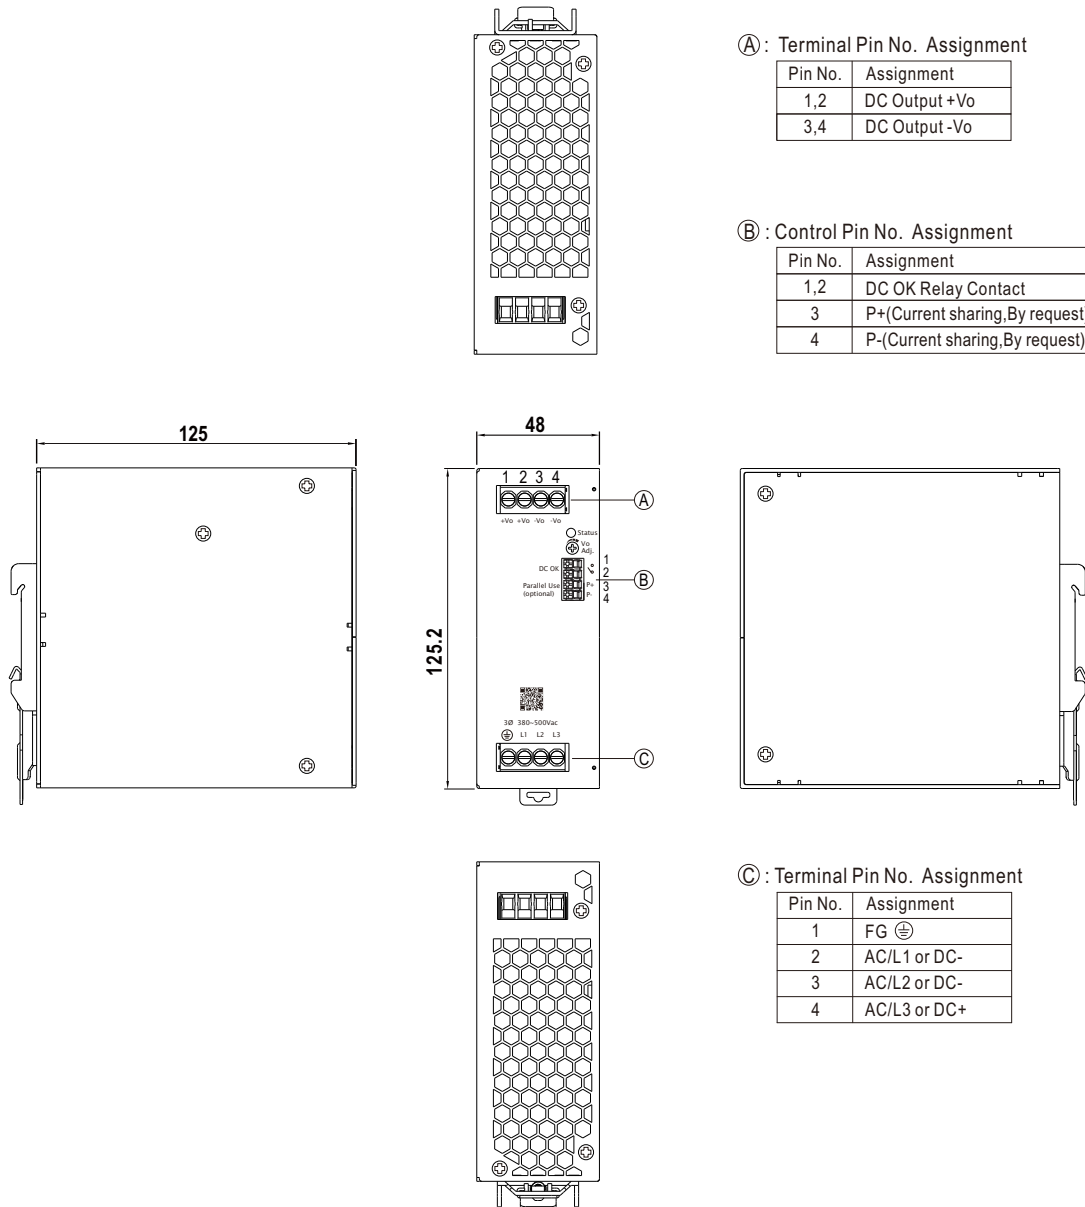

Recommend Wiring

※ Screw Terminal Torque

		AC Input T.B	DC Output T.B	Signal connector
Solid Wire		6mm ² max.	6mm ² max.	1.5mm ² max.
A.W.G	XTR-240-12	18~10 AWG	12~10 AWG	24~16 AWG
	XTR-240-24/36/48		16~10 AWG	
Wire Stripping Length		10~11mm	10~11mm	8~9mm
Screw Terminal Torque		5 Lb-In	5 Lb-In	/




240W AC/DC 3Ø Input Ultra Slim Industrial DIN Rail Power **XTR-240** series

※ Lever-Actuated and Push In

		AC Input T.B	DC Output T.B	Signal connector
Solid Wire		6mm ² max.	6mm ² max.	1.5mm ² max.
A.W.G	XTR-240-12	18~10 AWG	12~10 AWG	24~16 AWG
	XTR-240-24/36/48		16~10 AWG	
Wire Stripping Length		10~11mm	10~11mm	8~9mm
Screw Terminal Torque		Not applicable		

■ Installation Instruction

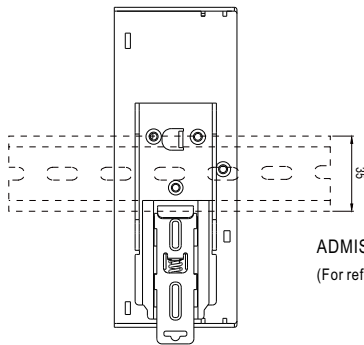

This series fits DIN rail TS35/7.5 or TS35/15.
For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15
(For reference only. Not included with unit.)

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>