


Features


- Ideally suited for automatic insertion
- Complementary PNP types available (BC856x series)
- RoHS compliant

Applications

- For switching and RF amplifier applications



SOT-23



Schematic Diagram

Absolute Maximum Ratings (T_A=25 °C unless otherwise noted)

Parameter	Symbol	Max.	Unit
Collector-Base Voltage	V _{CB0}	80	V
Collector-Emitter Voltage	V _{CEO}	65	V
Emitter-Base Voltage	V _{EBO}	6	V
Peak Collector Current	I _{CM}	200	mA
Collector Current-Continuous	I _C	100	mA
Collector Power Dissipation	P _C	200	mW
Typical Thermal Resistance from Junction to Ambient	R _{θJA}	410	°C/W
Operating Junction Temperature Range	T _J	-55 To +150	°C
Storage Temperature Range	T _{STG}	-55 To +150	°C

Electrical Characteristics (T_A=25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-Base Cut-Off Current	I _{CB0}	V _{CB} =30V, I _E =0	-	-	15	nA
Emitter-Base Cut-Off Current	I _{EBO}	V _{EB} =5V, I _C =0	-	-	100	nA
DC Current Gain	h _{FE}	V _{CE} =5V, I _C =2.0mA	110	-	220	-
			200	-	450	-
			420	-	800	-
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =10mA, I _B =0.5mA	-	0.09	0.25	V
		I _C =100mA, I _B =5.0mA	-	0.2	0.6	V
Base-Emitter Saturation Voltage	V _{BE(sat)}	I _C =10mA, I _B =0.5mA	-	0.7	-	V
		I _C =100mA, I _B =5.0mA	-	0.9	-	V
Base-Emitter Voltage	V _{BE}	V _{CE} =5V, I _C =2.0mA	0.58	-	0.7	V
		V _{CE} =5V, I _C =10mA	-	-	0.75	V
Transition Frequency	f _T	V _{CE} =5V, I _C =10mA, F=100MHz	100	-	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =10V, I _E =0, F=1MHz	-	2.5	4.5	pF

Marking & Classification of h_{FE}

h _{FE} Classification	BC846A	BC846B	BC846C
h _{FE} Range	110-220	200-450	420-800
Marking	H1A	H1B	1C

Ratings and Characteristic Curves

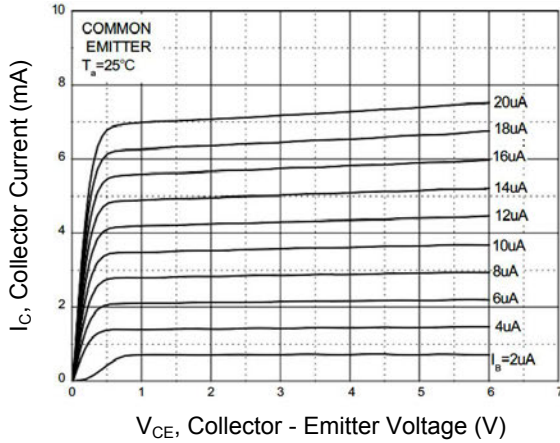


Figure 1. Static Characteristic

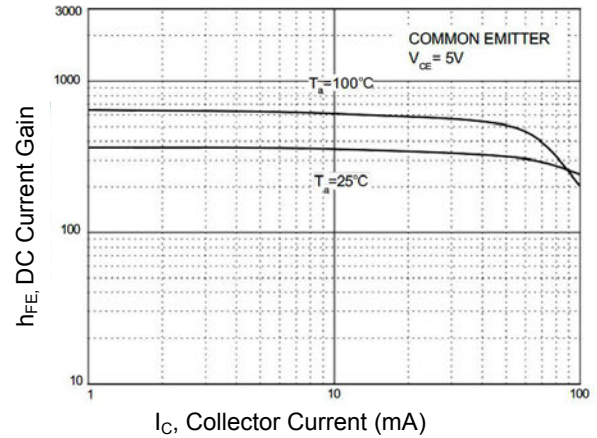


Figure 2. DC Current Gain vs Collector Current

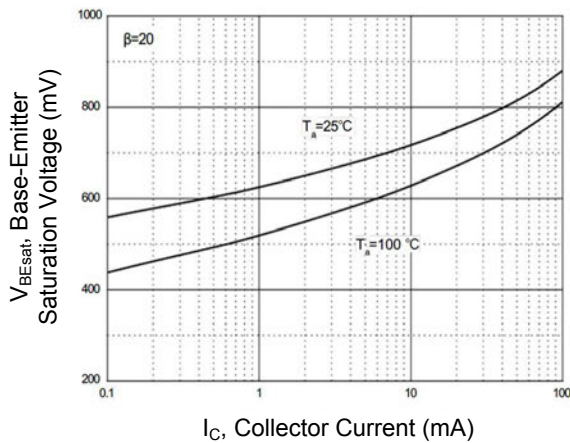


Figure 3. Base - Emitter Saturation Voltage vs. Collector Current

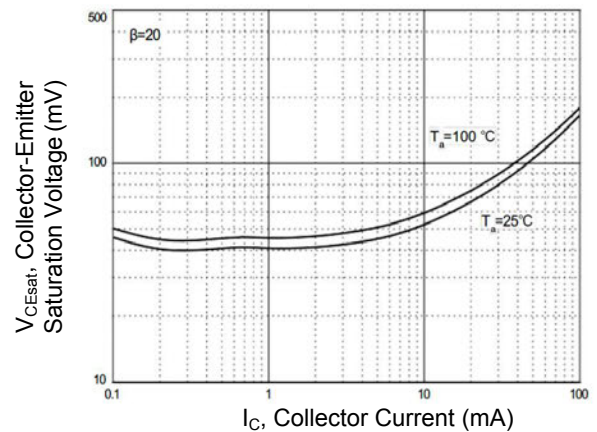


Figure 4. Collector - Emmitter Saturation Voltage vs. Collector Current

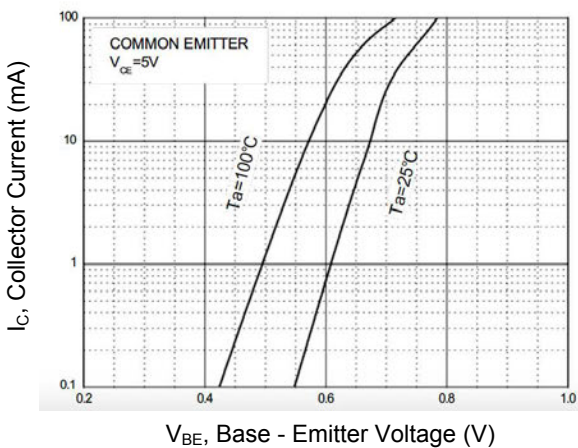


Figure 5. Collector Current vs. Base - Emitter Voltage

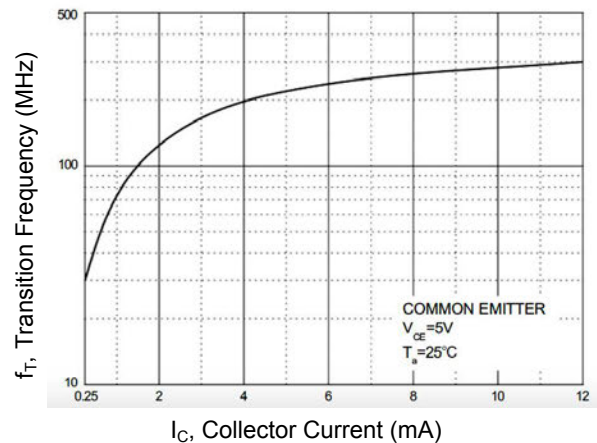


Figure 6. Transition Frequency vs. Collector Current

Ratings and Characteristic Curves

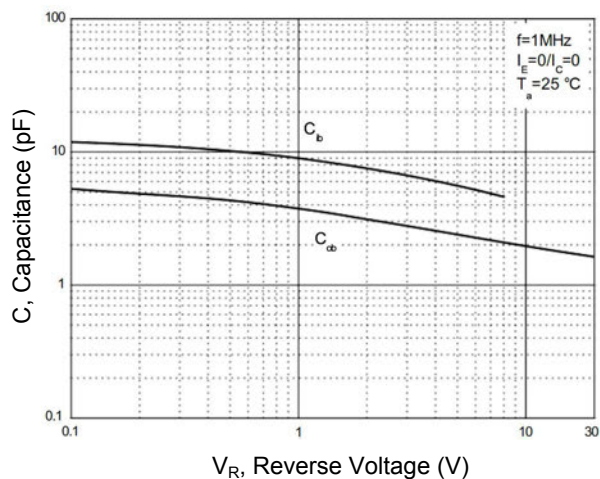


Figure 7. Capacitance Characteristics


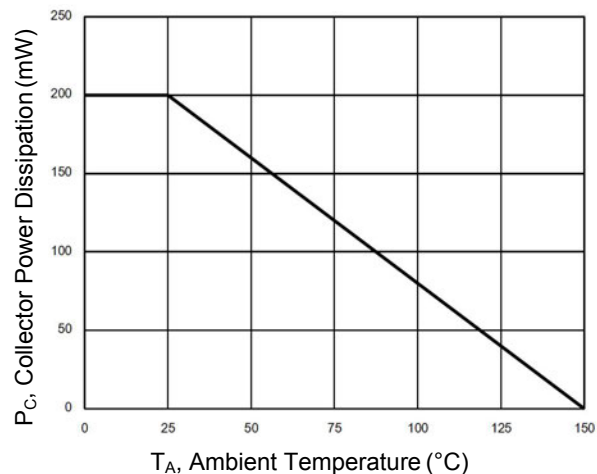



Figure 8. Power Dissipation vs Ambient Temperature

Package Outline Dimensions (SOT-23)

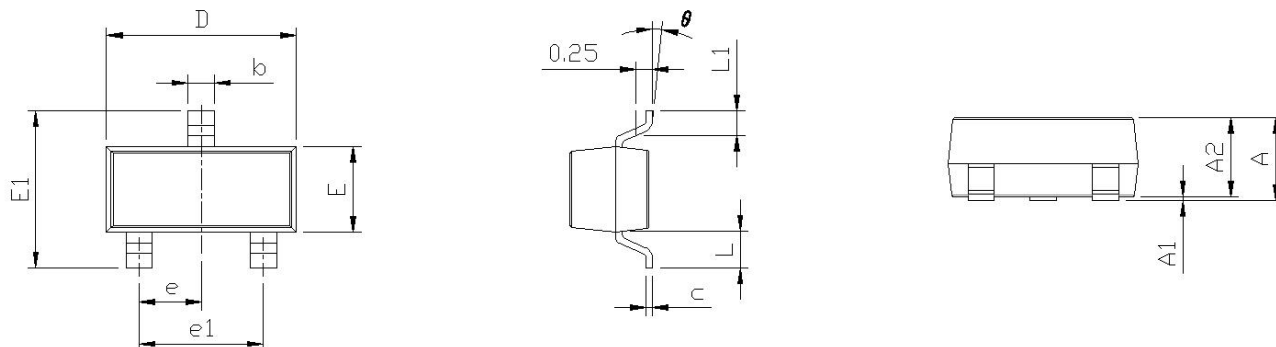

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Recommended Pad Layout



Note:

1. Controlling dimensions: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.