

COMPACT HIGH POWER RELAY

1 POLE - 40A (FOR AUTOMOTIVE APPLICATIONS)

FBR53-HW Series

RoHS Compliant

■ FEATURES

- Small 40A relay
- High temperature grade (-40°C to 125°C)
- Contact arrangement Form U (form A)
- Surface mount compatible (reflow capability)
- Inrush current 80A
- Coil wire temperature class: H



■ PART NUMBERS

[Example] FBR53 N D12 - Y - HW - RW
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FBR53 series
(b)	Enclosure	N : Plastic sealed type
(c)	Coil rated voltage	012 : 9...12VDC See coil rating table
(d)	Contact material	Y : Silver-tin oxide
(e)	Contact rating	HW : 40A
(f)	Soldering	Nil : Standard (Flow soldering) RW : Reflow capable (THR)

Actual markings does not carry the type name: "FBR"

E.g.: Ordering code: FBR53ND12-Y-HW Actual marking: 53ND12-Y-HW

■ SPECIFICATIONS

Item		Specifications	Remarks/Conditions
Contact Data	Configuration	1 Form U	
	Material	Silver-tin oxide	
	Voltage drop	Max. 100 mV at 1A, 12VDC. Average 1.2mΩ at 7A, 12VDC	
	Contact rating	40A, 14VDC	Resistive load
	Max. carrying current	40A	
	Max. inrush current	80A	Reference
	Min. switching load ^{*1}	1A, 6VDC	Reference
Coil	Rated power consumption	860mW	At 20°C
	Operate power consumption	310mW	At 20°C
	Operating temperature range	-40°C ~ +125°C	No frost
Time	Operate	Max. 10ms	At nominal voltage
	Release	Max. 10ms	At nominal voltage
Life	Mechanical	Min. 1 x 10 ⁶ operations	Without contact load
	Electrical	Min. 100 x 10 ³ operations	14VDC, 40A resistive load
Insulation	Insulation resistance		Min. 100MΩ
	Dielectric withstanding voltage	Open contacts	500VAC (50/60Hz), 1 minute
		Coil to contacts	500VAC (50/60Hz), 1 minute
Others	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.4G) constant acceleration
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.4G) constant acceleration
	Shock resistance	Misoperation	100m/s ² (11±1ms)
		Endurance	1,000m/s ² (6±1ms)
	Dimensions / Weight		12.3 x15.7x14.0 mm / approx. 6g

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

! Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

■ COIL DATA

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ±10% (Ω)	Must Operate Voltage* ¹ (VDC)	Must Release Voltage* ¹ (VDC)
D09	9	94	5.4 7.7 (at 125°C)	0.7 1.0 (at 125°C)
D10	10	117	6.3 9 (at 125°C)	0.8 1.2 (at 125°C)
D12	12	167	7.3 10.4 (at 125°C)	1.0 1.5 (at 125°C)


Note: All values in the table are valid at 20oC and zero contact current, unless otherwise specified.

*1: Specified operated values are valid for pulse wave voltage.

Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.


■ DIMENSIONS

Dimensions

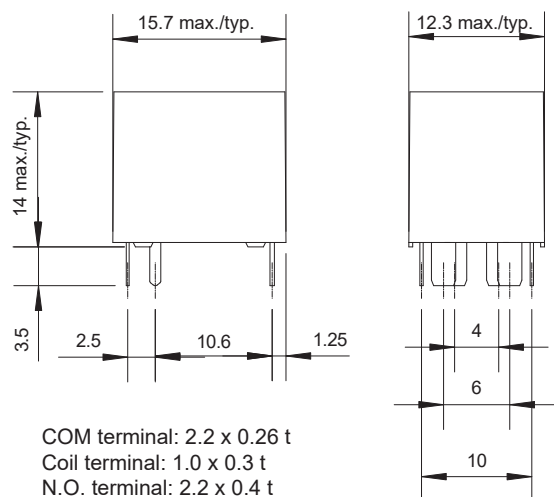


Dimensions of the terminals do not include thickness of pre-soldering.

Schematics
(BOTTOM VIEW)



Pattern shall be designed to short-circuit #4 and #5 on the PC board.

PC board mounting hole layout
(BOTTOM VIEW)

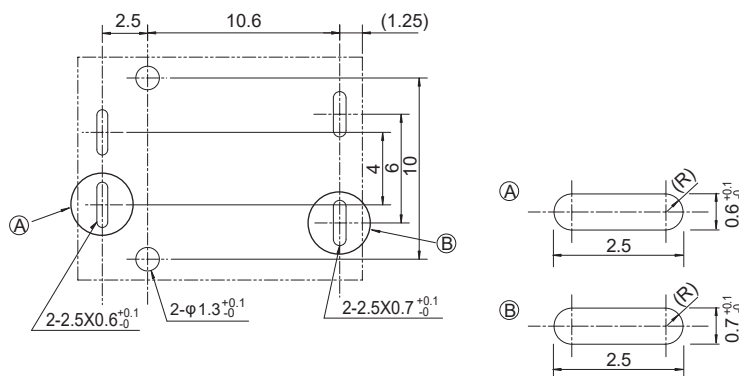


Tolerance of PC board mounting hole layout : ± 0.1 unless otherwise specified.

(): Reference value
Unit: mm


■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)


Distribution of operate/release voltage

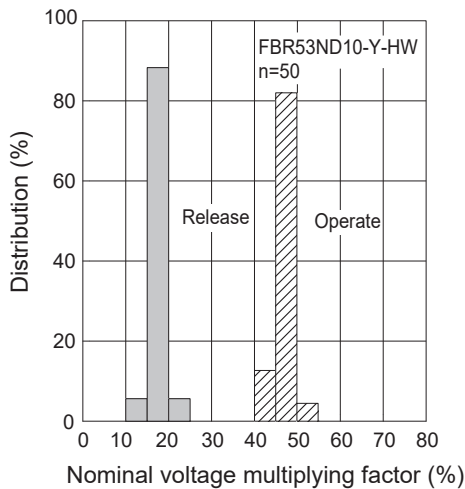


Distribution of operate/release time

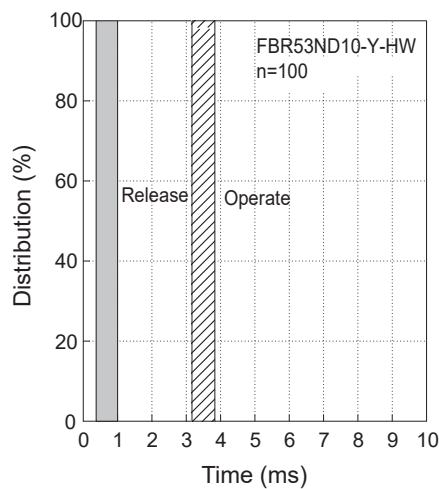


Distribution of contact resistance

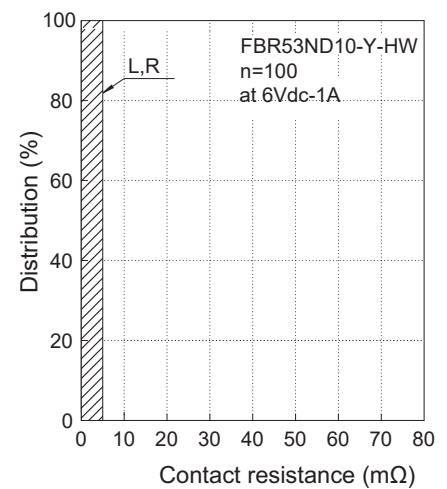


Contact current

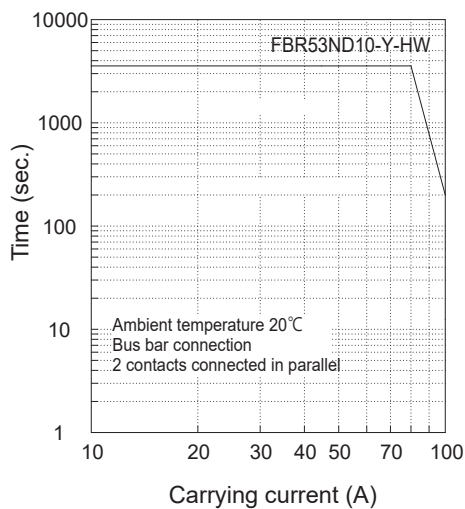


Ambient temperature/voltage

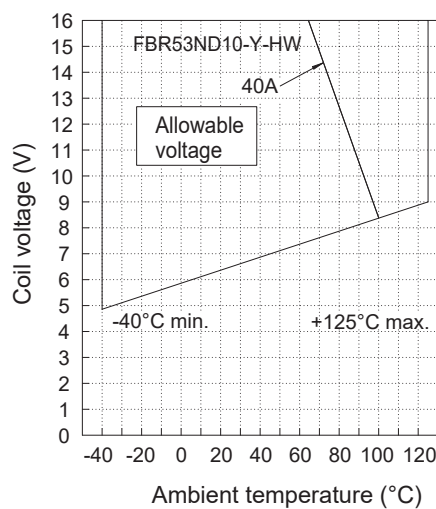


Coil temperature rise (1)

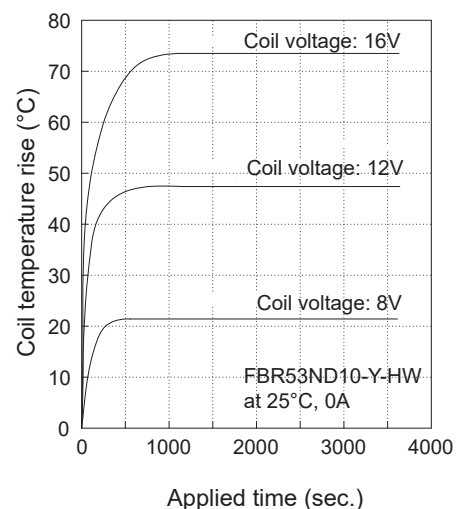

Coil temperature rise (2)

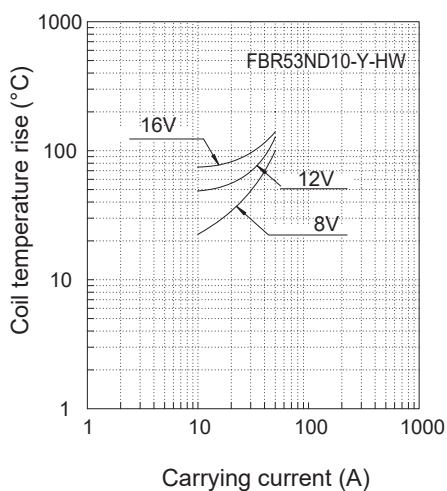

Max. allowable switching

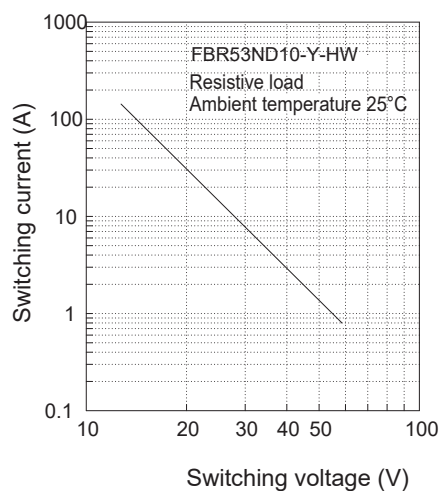

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited for flow soldering type.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. RoHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C
within 90 sec.
Soldering: Dip within 5 sec. at 255°C±5°C
solder bath
Relay must be cooled by air immediately after
soldering


Solder by Soldering Iron:

Soldering Iron: 30-60W
Temperature: maximum 340-360°C
Duration: maximum 3 sec.

Reflow Solder Condition:

(Applicable only for reflow capable type)

Recommended reflow soldering profile
IRS (infrared reflow soldering)

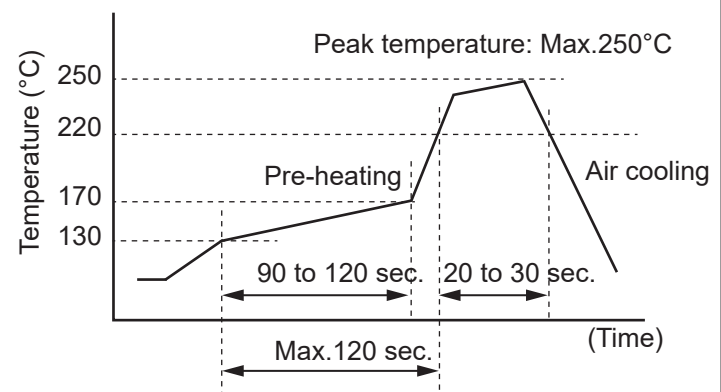

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in-house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
c/o Masuda, Funai, Eifert & Mitchell, Ltd.
203 N LaSalle Street Suite 170, Chicago, IL
60601-1265, USA
Tel: +1-408-745-4900
Email: contact@fcl-components.us

Europe

FCL COMPONENTS EUROPE B.V.
Siriusdreef 9
2132 WT Hoofddorp
The Netherlands
Tel: +31-23-556-0910
Email: info@fcl-components.eu

China

FCL COMPONENTS (SHANGHAI) CO.,LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai
200070, China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Asia

FCL COMPONENTS HONG KONG CO.,
LIMITED
Unit 2313, Seapower Tower, Concordia
Plaza, No.1 Science Museum Road,
TST, Kowloon, Hong Kong
Tel: +852-2881-8495
Email: fcsl@fcl-components.com

Web: www.fcl-components.com/en/

© 2026 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 13, 2026.