


CXT2907A

**SURFACE MOUNT  
PNP SILICON TRANSISTOR**



**SOT-89 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CXT2907A type is a PNP silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal general purpose and switching applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance

**SYMBOL**

$V_{CBO}$  60  
 $V_{CEO}$  60  
 $V_{EBO}$  5.0  
 $I_C$  600  
 $P_D$  1.2  
 $T_J, T_{stg}$  -65 to +150  
 $\theta_{JA}$  104

**UNITS**

V  
V  
V  
mA  
W  
 $^{\circ}\text{C}$   
 $^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

| SYMBOL        | TEST CONDITIONS                              | MIN | MAX | UNITS         |
|---------------|----------------------------------------------|-----|-----|---------------|
| $I_{CBO}$     | $V_{CB}=50\text{V}$                          |     | 10  | nA            |
| $I_{CBO}$     | $V_{CB}=50\text{V}, T_A=125^{\circ}\text{C}$ |     | 10  | $\mu\text{A}$ |
| $I_{CEV}$     | $V_{CE}=30\text{V}, V_{BE}=0.5\text{V}$      |     | 50  | nA            |
| $BV_{CBO}$    | $I_C=10\mu\text{A}$                          | 60  |     | V             |
| $BV_{CEO}$    | $I_C=10\text{mA}$                            | 60  |     | V             |
| $BV_{EBO}$    | $I_E=10\mu\text{A}$                          | 5.0 |     | V             |
| $V_{CE(SAT)}$ | $I_C=150\text{mA}, I_B=15\text{mA}$          |     | 0.4 | V             |
| $V_{CE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$          |     | 1.6 | V             |
| $V_{BE(SAT)}$ | $I_C=150\text{mA}, I_B=15\text{mA}$          |     | 1.3 | V             |
| $V_{BE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$          |     | 2.6 | V             |
| $h_{FE}$      | $V_{CE}=10\text{V}, I_C=0.1\text{mA}$        | 75  |     |               |
| $h_{FE}$      | $V_{CE}=10\text{V}, I_C=1.0\text{mA}$        | 100 |     |               |
| $h_{FE}$      | $V_{CE}=10\text{V}, I_C=10\text{mA}$         | 100 |     |               |
| $h_{FE}$      | $V_{CE}=10\text{V}, I_C=150\text{mA}$        | 100 | 300 |               |

R7 (23-February 2010)

**CXT2907A**


**SURFACE MOUNT**  
**PNP SILICON TRANSISTOR**



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

| SYMBOL    | TEST CONDITIONS                                                                | MIN | MAX | UNITS |
|-----------|--------------------------------------------------------------------------------|-----|-----|-------|
| $h_{FE}$  | $V_{CE}=10\text{V}$ , $I_C=500\text{mA}$                                       | 50  |     |       |
| $f_T$     | $V_{CE}=20\text{V}$ , $I_C=50\text{mA}$ , $f=100\text{MHz}$                    | 200 |     | MHz   |
| $C_{ob}$  | $V_{CB}=10\text{V}$ , $I_E=0$ , $f=1.0\text{MHz}$                              |     | 8.0 | pF    |
| $C_{ib}$  | $V_{BE}=2.0\text{V}$ , $I_C=0$ , $f=1.0\text{MHz}$                             |     | 30  | pF    |
| $t_{on}$  | $V_{CC}=30\text{V}$ , $V_{BE}=0.5$ , $I_C=150\text{mA}$ , $I_{B1}=15\text{mA}$ |     | 45  | ns    |
| $t_d$     | $V_{CC}=30\text{V}$ , $V_{BE}=0.5$ , $I_C=150\text{mA}$ , $I_{B1}=15\text{mA}$ |     | 10  | ns    |
| $t_r$     | $V_{CC}=30\text{V}$ , $V_{BE}=0.5$ , $I_C=150\text{mA}$ , $I_{B1}=15\text{mA}$ |     | 40  | ns    |
| $t_{off}$ | $V_{CC}=6.0\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=I_{B2}=15\text{mA}$        |     | 100 | ns    |
| $t_s$     | $V_{CC}=6.0\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=I_{B2}=15\text{mA}$        |     | 80  | ns    |
| $t_f$     | $V_{CC}=6.0\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=I_{B2}=15\text{mA}$        |     | 30  | ns    |

**SOT-89 CASE - MECHANICAL OUTLINE**

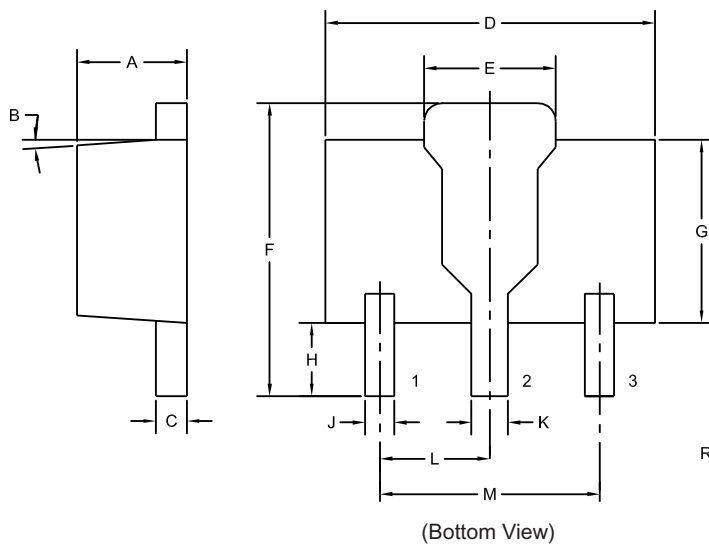

| SYMBOL | DIMENSIONS |       |             |      |
|--------|------------|-------|-------------|------|
|        | INCHES     |       | MILLIMETERS |      |
|        | MIN        | MAX   | MIN         | MAX  |
| A      | 0.055      | 0.067 | 1.40        | 1.70 |
| B      | 4°         |       | 4°          |      |
| C      | 0.014      | 0.018 | 0.35        | 0.46 |
| D      | 0.173      | 0.185 | 4.40        | 4.70 |
| E      | 0.064      | 0.074 | 1.62        | 1.87 |
| F      | 0.146      | 0.177 | 3.70        | 4.50 |
| G      | 0.090      | 0.106 | 2.29        | 2.70 |
| H      | 0.028      | 0.051 | 0.70        | 1.30 |
| J      | 0.014      | 0.019 | 0.36        | 0.48 |
| K      | 0.017      | 0.023 | 0.44        | 0.58 |
| L      | 0.059      |       | 1.50        |      |
| M      | 0.118      |       | 3.00        |      |

SOT-89 (REV: R4)

R4

**LEAD CODE:**

- 1) Emitter
- 2) Collector
- 3) Base

**MARKING:**

**FULL PART NUMBER**

R7 (23-February 2010)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)