

Bipolar Power Transistors

PNP Silicon

NJT4030P, NJV4030P

Features

- Epoxy Meets UL 94, V-0 @ 0.125 in
- NJV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS (T_C = 25 °C unless otherwise noted)

Symbol	Rating	Value	Unit
V _{CEO}	Collector-Emitter Voltage	40	Vdc
V _{CB}	Collector-Base Voltage	40	Vdc
V _{EB}	Emitter-Base Voltage	6.0	Vdc
I _B	Base Current - Continuous	1.0	Adc
I _C	Collector Current - Continuous	3.0	Adc
I _{CM}	Collector Current - Peak	5.0	Adc
HBM	ESD - Human Body Model	3B	V
MM	ESD - Machine Model	C	V


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS


Symbol	Characteristic	Max	Unit
P _D	Total Power Dissipation Total P _D @ T _A = 25 °C (Note 1) Total P _D @ T _A = 25 °C (Note 2)	2.0 0.80	W
R _{θJC} R _{θJA} R _{θJA}	Thermal Resistance Junction-to-Case Junction-to-Ambient (Note 1) Junction-to-Ambient (Note 2)	11 64 155	°C/W
T _L	Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds	260	°C
T _J , T _{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

1. Mounted on 1" sq. (645 sq. mm) Collector pad on FR-4 bd material.
2. Mounted on 0.012" sq. (7.6 sq. mm) Collector pad on FR-4 bd material.


PNP TRANSISTOR 3.0 AMPERES 40 VOLTS, 2.0 WATTS



SOT-223
CASE 318E
STYLE 1



MARKING DIAGRAM



- A = Assembly Location
Y = Year
W = Work Week
4030P = Specific Device Code
▪ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
NJT4030PT1G	SOT-223 (Pb-Free)	1,000 / Tape & Reel
NJV4030PT1G		
NJT4030PT3G	SOT-223 (Pb-Free)	4,000 / Tape & Reel
NJV4030PT3G		

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, [BRD8011/D](#).

NJT4030P, NJV4030P

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Characteristic	Min	Typ	Max	Unit
--------	----------------	-----	-----	-----	------

OFF CHARACTERISTICS

$V_{CE(sus)}$	Collector-Emitter Sustaining Voltage ($I_C = 10\text{ mAdc}$, $I_B = 0\text{ Adc}$)	40	–	–	Vdc
V_{EBO}	Emitter-Base Voltage ($I_E = 50\text{ }\mu\text{Adc}$, $I_C = 0\text{ Adc}$)	6.0	–	–	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB} = 40\text{ Vdc}$)	–	–	100	nAdc
I_{EBO}	Emitter Cutoff Current ($V_{BE} = 6.0\text{ Vdc}$)	–	–	100	nAdc

ON CHARACTERISTICS (Note 3)

$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = 0.5\text{ Adc}$, $I_B = 5.0\text{ mAdc}$) ($I_C = 1.0\text{ Adc}$, $I_B = 10\text{ mAdc}$) ($I_C = 3.0\text{ Adc}$, $I_B = 0.3\text{ Adc}$)	– – –	– – –	0.150 0.200 0.500	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C = 1.0\text{ Adc}$, $I_B = 0.1\text{ Adc}$)	–	–	1.0	Vdc
$V_{BE(on)}$	Base-Emitter On Voltage ($I_C = 1.0\text{ Adc}$, $V_{CE} = 2.0\text{ Vdc}$)	–	–	1.0	Vdc
h_{FE}	DC Current Gain ($I_C = 0.5\text{ Adc}$, $V_{CE} = 1.0\text{ Vdc}$) ($I_C = 1.0\text{ Adc}$, $V_{CE} = 1.0\text{ Vdc}$) ($I_C = 3.0\text{ Adc}$, $V_{CE} = 1.0\text{ Vdc}$)	220 200 100	– – –	– 400 –	–

DYNAMIC CHARACTERISTICS

C_{ob}	Output Capacitance ($V_{CB} = 10\text{ Vdc}$, $f = 1.0\text{ MHz}$)	–	40	–	pF
C_{ib}	Input Capacitance ($V_{EB} = 5.0\text{ Vdc}$, $f = 1.0\text{ MHz}$)	–	130	–	pF
f_T	Current-Gain - Bandwidth Product (Note 4) ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $F_{test} = 1.0\text{ MHz}$)	–	160	–	MHz

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Pulse Test: Pulse Width $\leq 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$.

4. $f_T = |h_{FE}| \cdot f_{test}$

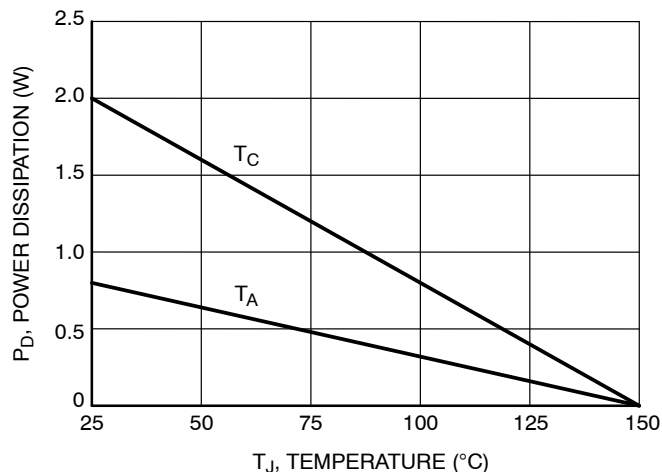


Figure 1. Power Derating

TYPICAL CHARACTERISTICS

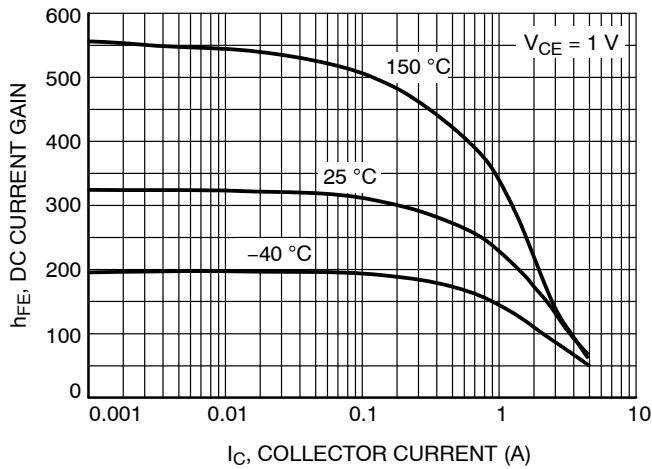


Figure 2. DC Current Gain

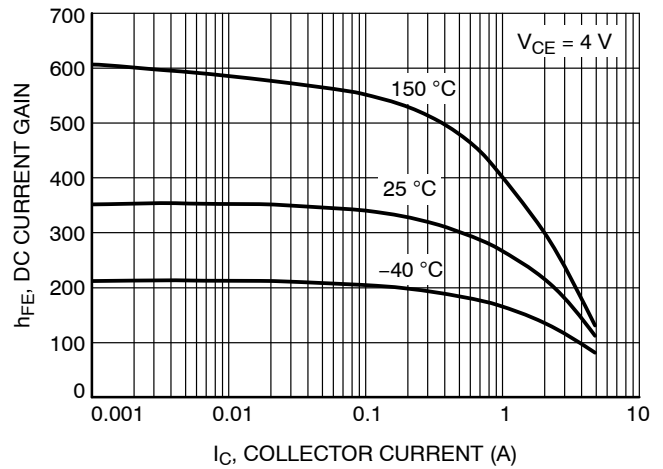


Figure 3. DC Current Gain

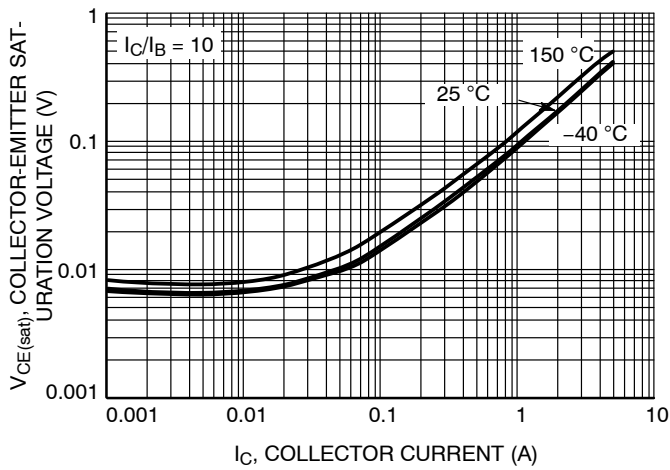


Figure 4. Collector-Emitter Saturation Voltage

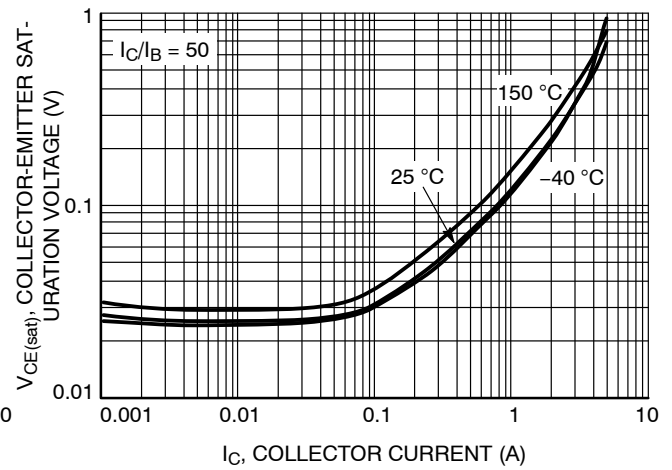


Figure 5. Collector-Emitter Saturation Voltage

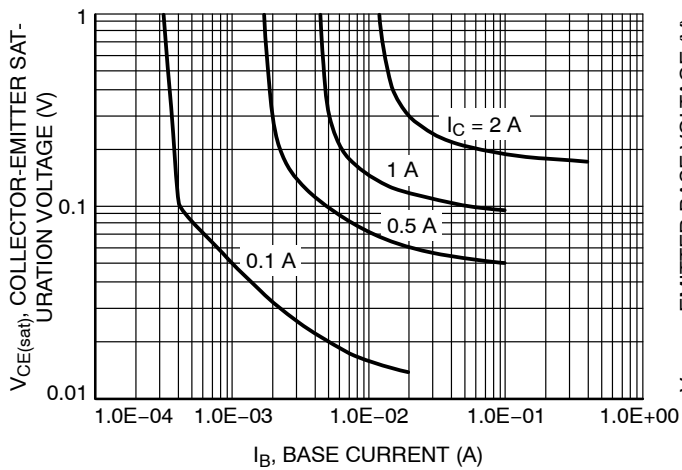


Figure 6. Collector Saturation Region

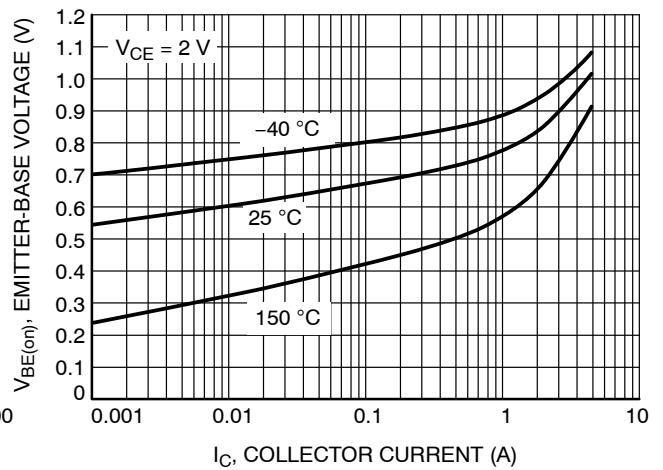


Figure 7. $V_{BE(on)}$ Voltage

TYPICAL CHARACTERISTICS (continued)

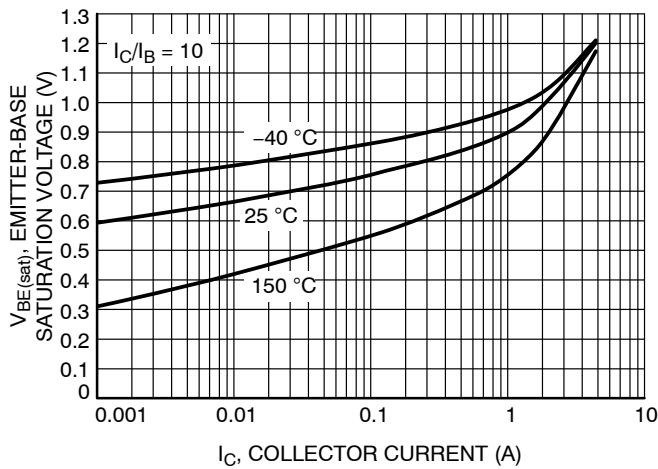


Figure 8. Base-Emitter Saturation Voltage

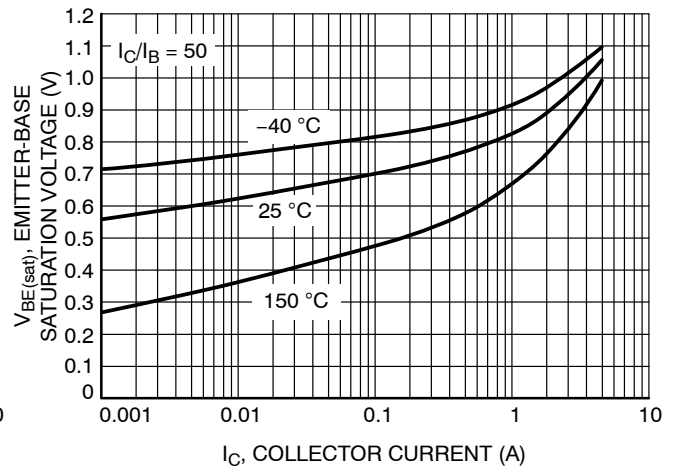


Figure 9. Base-Emitter Saturation Voltage

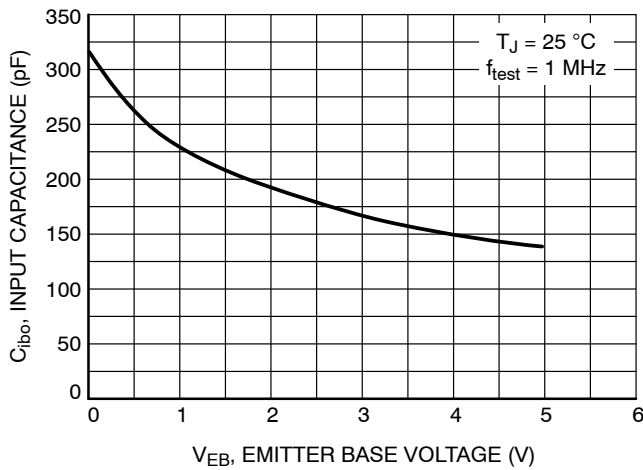


Figure 10. Input Capacitance

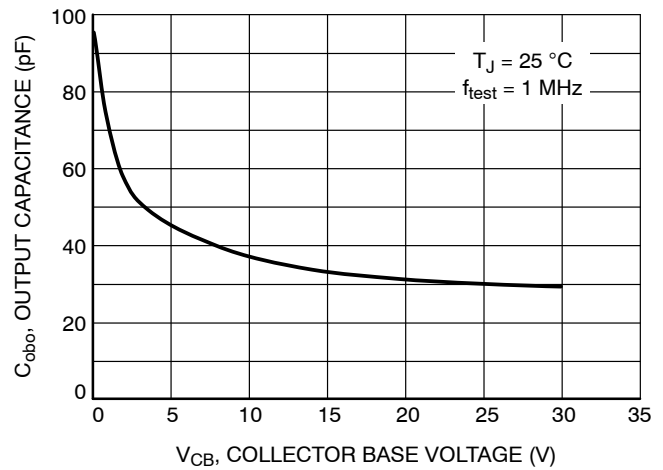


Figure 11. Output Capacitance

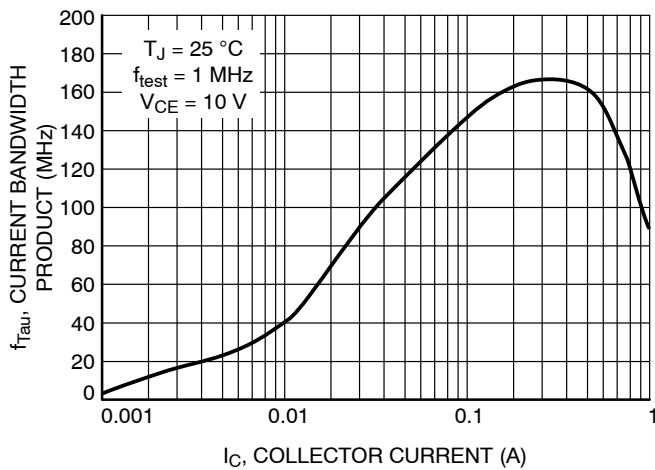


Figure 12. Current-Gain Bandwidth Product

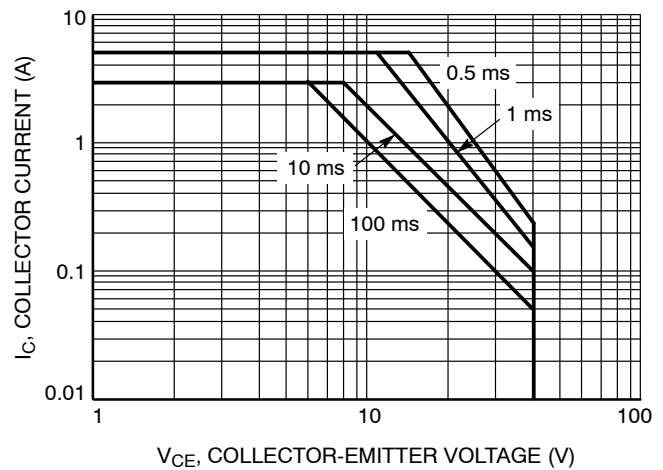


Figure 13. Safe Operating Area

NJT4030P, NJV4030P

REVISION HISTORY

Revision	Description of Changes	Date
8	Rebranded the Data Sheet to onsemi format.	6/26/2025

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.



onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

