

200mW, PNP Small Signal Transistor

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: SOT-23
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 0.008 g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_{CBO}	-80	V
V_{CEO}	-65	V
V_{EBO}	-5	V
I_C	-0.1	A
h_{FE}	250-800	
Package	SOT-23	
Configuration	Single die	

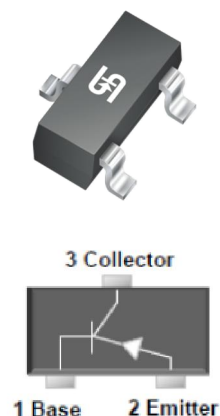

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Marking code on the device	BC856A		3A	
	BC856B		3B	
	BC857A		3E	
	BC857B		3F	
	BC857C		3G	
	BC858A		3J	
	BC858B		3K	
	BC858C		3L	
Power dissipation		P_D	200	mW

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	VALUE	UNIT
Collector-base voltage	BC856	V_{CBO}	-80	V
	BC857		-50	
	BC858		-30	
Collector-emitter voltage	BC856	V_{CEO}	-65	V
	BC857		-45	
	BC858		-30	
Emitter-base voltage		V_{EBO}	-5	V
Collector current		I_C	-0.1	A
Junction temperature		T_J	-55 to +150	$^\circ\text{C}$
Storage temperature		T_{STG}	-55 to +150	$^\circ\text{C}$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	MAX	UNIT
Collector cutoff current	$V_{CB} = -70\text{ V}, I_E = 0$ BC856	I_{CBO}	-	-100	nA
	$V_{CB} = -45\text{ V}, I_E = 0$ BC857		-	-100	
	$V_{CB} = -25\text{ V}, I_E = 0$ BC858		-	-100	
Emitter cutoff current	$V_{EB} = -5\text{ V}, I_C = 0$	I_{EBO}	-	-0.1	μA
Collector-base voltage	$I_C = -10\text{ }\mu\text{A}, I_E = 0$	BC856	-80	-	V
		BC857	-50	-	
		BC858	-30	-	
Collector-emitter voltage	$I_C = -10\text{ mA}, I_B = 0$	BC856	-65	-	V
		BC857	-45	-	
		BC858	-30	-	
Emitter-base voltage	$I_E = -1\text{ }\mu\text{A}, I_C = 0$	V_{EBO}	-5	-	V
DC current gain	$V_{CE} = -5\text{ V}, I_C = -2\text{ mA}$	BC856A/BC857A/BC858A	125	250	
		BC856B/BC857B/BC858B	220	475	
		BC857C/BC858C	420	800	
Collector-emitter saturation voltage	$I_C = -100\text{ mA}, I_B = -5\text{ mA}$	$V_{CE(sat)}$	-	-0.65	V
Base-emitter saturation voltage	$I_C = -100\text{ mA}, I_B = -5\text{ mA}$	$V_{BE(sat)}$	-	-1.10	V
Transition frequency	$V_{CE} = -5\text{ V}, I_C = -10\text{ mA}, f = 100\text{ MHz}$	f_T	100	-	MHz

ORDERING INFORMATION

ORDERING CODE (Note1, 2)	PACKAGE	PACKING
BC85XX RF	SOT-23	3K / 7" Reel
BC85XX RFG	SOT-23	3K / 7" Reel

Note:

1. "xx" is device code "6A" to "8C"
2. "G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Static Characteristic

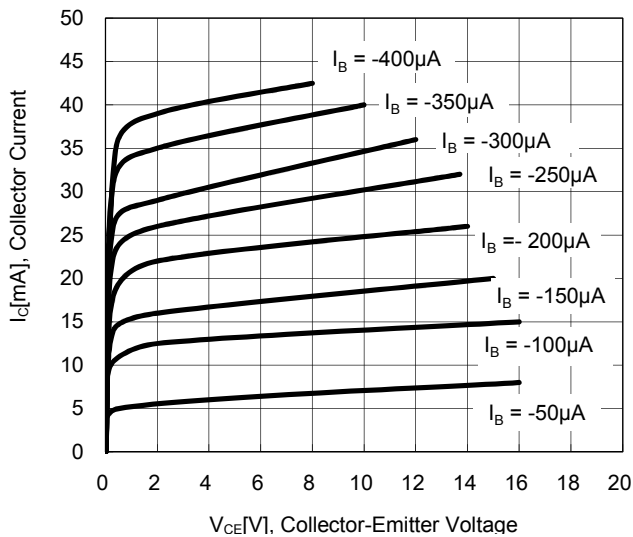


Fig. 2 DC Current Gain

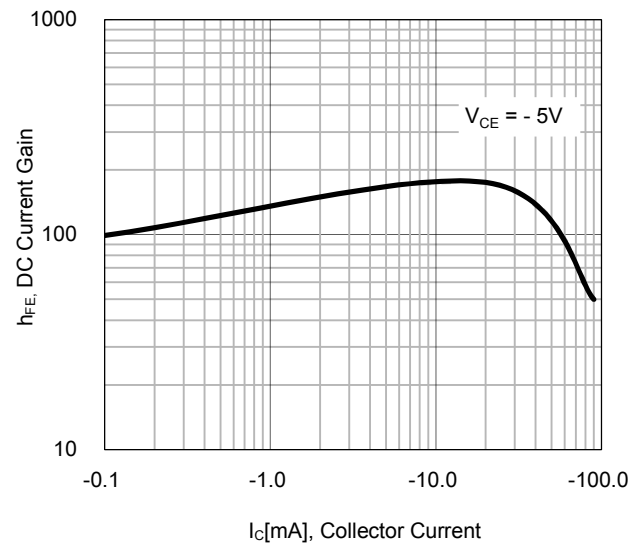


Fig.3 Base-Emitter Saturation Voltage VS. Collector-Emitter Saturation


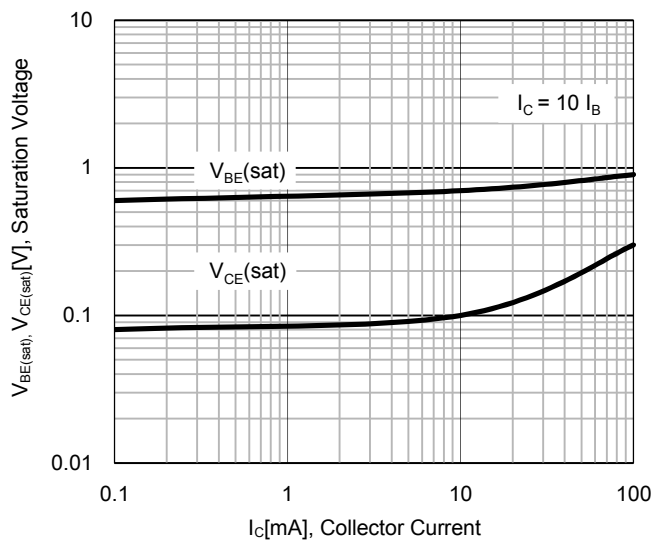


Fig.4 Base-Emitter On Voltage

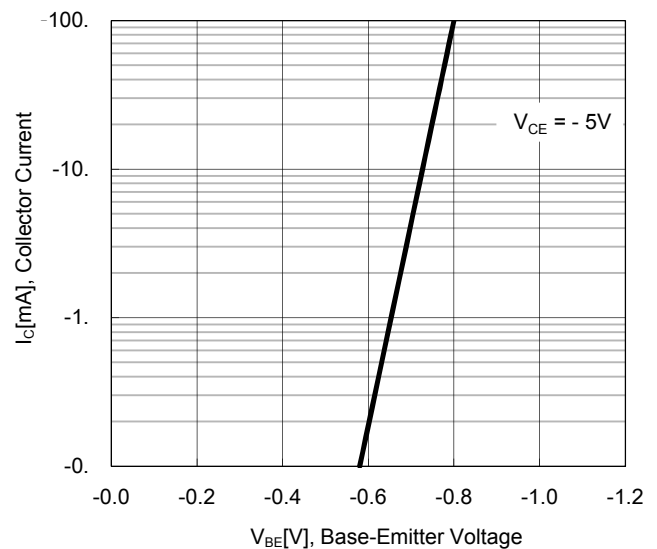

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Collector Output Capacitance

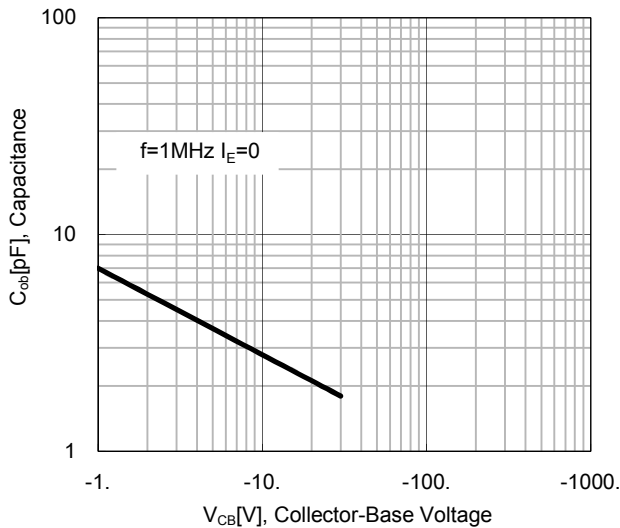


Fig. 6 Current Gain Bandwidth Product

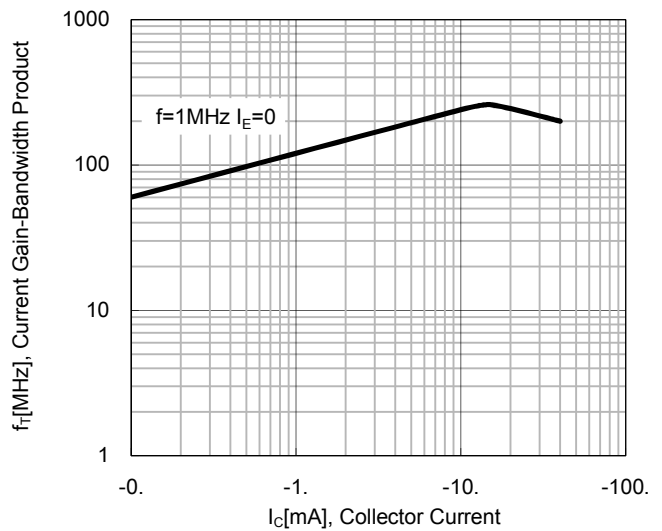


Fig.7 DC Current Gain as a Function of Collector Current; Typical Values



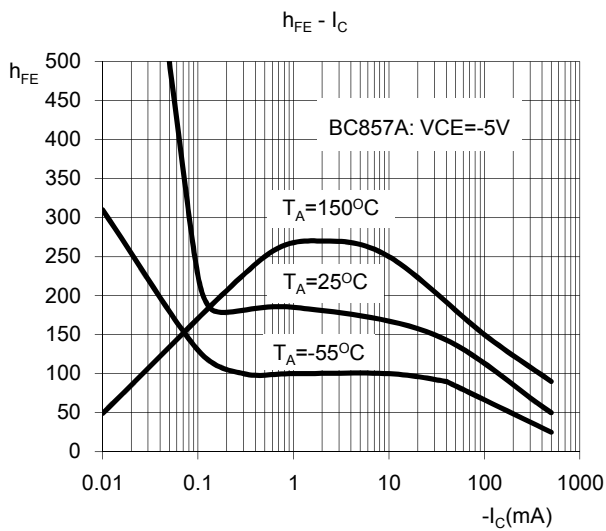


Fig.8 Base-Emitter Voltage as a Function of Collector Current; Typical Values

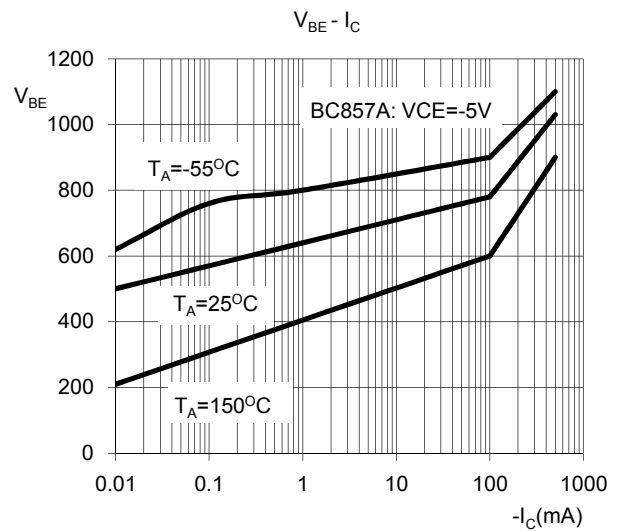


PACKAGE OUTLINE DIMENSION

SOT-23

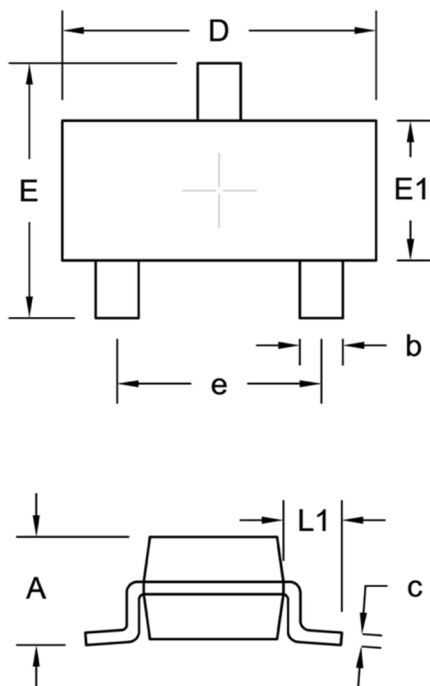

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.89	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.04	0.110	0.120
E	2.10	2.64	0.083	0.104
E1	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L1	0.54 REF.		0.021 REF.	

SUGGESTED PAD LAYOUT

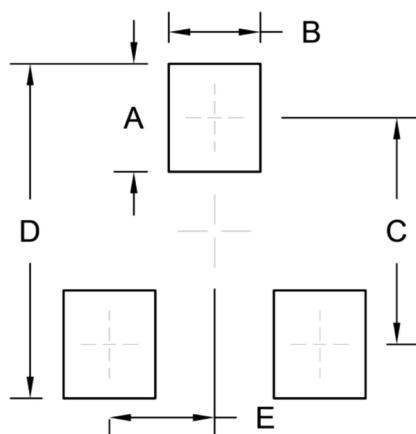

Symbol	Unit (mm)	Unit (inch)
A	1.00	0.039
B	0.85	0.033
C	2.10	0.083
D	3.10	0.122
E	0.98	0.039

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.