

2N6298 2N6299 PNP
2N6300 2N6301 NPN

**COMPLEMENTARY SILICON
DARLINGTON POWER TRANSISTORS**



TO-66 CASE



www.centralemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N6298 series devices are complementary silicon Darlington power transistors manufactured by the epitaxial base process designed for high gain amplifier and medium speed switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Peak Collector Current
Continuous Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

V_{CBO}
 V_{CEO}
 V_{EBO}
 I_C
 I_{CM}
 I_B
 P_D
 T_J, T_{stg}
 θ_{JC}

2N6298

2N6300

60

60

5.0

8.0

16

120

75

-65 to +200

2.33

2N6299

2N6301

80

80

5.0

8.0

16

120

75

-65 to +200

2.33

UNITS

V

V

V

A

A

mA

W

$^\circ\text{C}$

$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL

TEST CONDITIONS

MIN

MAX

UNITS

I_{CEV} $V_{CE}=\text{Rated } V_{CEO}, V_{BE}=1.5\text{V}$

0.5

mA

I_{CEV} $V_{CE}=\text{Rated } V_{CEO}, V_{BE}=1.5\text{V}, T_C=150^\circ\text{C}$

5.0

mA

I_{CEO} $V_{CE}=\frac{1}{2}\text{Rated } V_{CEO}$

0.5

mA

I_{EBO} $V_{EB}=5.0\text{V}$

2.0

mA

BV_{CEO} $I_C=100\text{mA}$ (2N6298, 2N6300)

60

V

BV_{CEO} $I_C=100\text{mA}$ (2N6299, 2N6301)

80

V

$V_{CE(SAT)}$ $I_C=4.0\text{A}, I_B=16\text{mA}$

2.0

V

$V_{CE(SAT)}$ $I_C=8.0\text{A}, I_B=80\text{mA}$

3.0

V

$V_{BE(SAT)}$ $I_C=8.0\text{A}, I_B=80\text{mA}$

4.0

V

$V_{BE(ON)}$ $V_{CE}=3.0\text{V}, I_C=4.0\text{A}$

2.8

V

h_{FE} $V_{CE}=3.0\text{V}, I_C=4.0\text{A}$

750

18K

h_{FE} $V_{CE}=3.0\text{V}, I_C=8.0\text{A}$

100

h_{fe} $V_{CE}=3.0\text{V}, I_C=3.0\text{A}, f=1.0\text{kHz}$

300

f_T $V_{CE}=3.0\text{V}, I_C=3.0\text{A}, f=1.0\text{MHz}$

4.0

MHz

C_{ob} $V_{CB}=10\text{V}, I_E=0, f=100\text{kHz}$ (NPN types)

200

pF

C_{ob} $V_{CB}=10\text{V}, I_E=0, f=100\text{kHz}$ (PNP types)

300

pF


R3 (2-September 2014)

2N6298 2N6299 PNP
2N6300 2N6301 NPN

COMPLEMENTARY SILICON
DARLINGTON POWER TRANSISTORS



TO-66 CASE - MECHANICAL OUTLINE

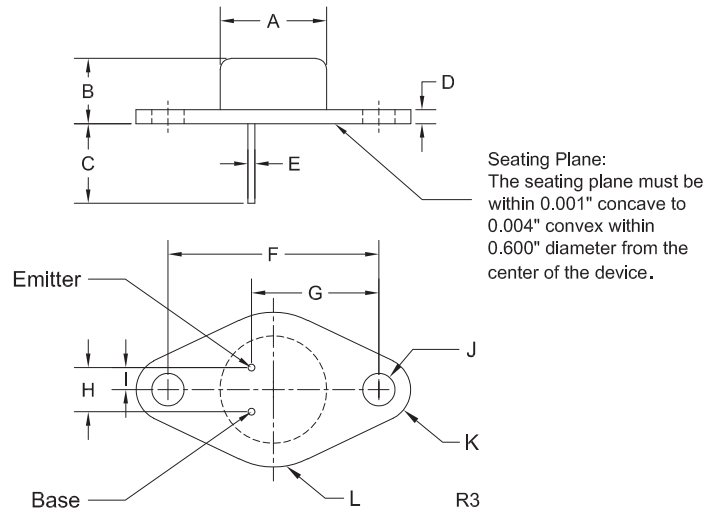

MARKING:
FULL PART NUMBER

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.956	0.964	24.28	24.48
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.141		3.58	
L (RAD)	0.345		8.76	

TO-66 (REV:R3)

R3 (2-September 2014)

www.centalsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms