


# Part No. 1003893FT

## BT Tunable FPC 2.4 GHz Embedded Antenna

**2.4 GHz**

Supports: Wi-Fi applications, Bluetooth, Zigbee, WLAN

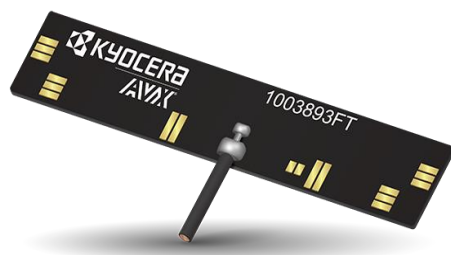

**BT Tunable FPC 2.4 GHz Embedded Antenna**

2.400 – 2.485 GHz

KYOCERA AVX WLAN antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for 2.4 GHz enabled devices.

### Real-World Performance and Implementation

Antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PIFA or monopole designs that interact with their surroundings, complicating layout or changing performance with use position. KYOCERA AVX antennas utilize patented Isolated Magnetic Dipole (IMD) technology to deliver a unique size and performance combination. This antenna is also offered in PCB form under PN# 1003893PT.

The 1003893FT is offered in many standard cable lengths ranging up to 200 mm. Ordering part number guide is located at end of document for selection ease.

### Electrical Specifications

Typical Performance using 100 mm cable tested on PC-ABS

| Frequency            | 2.400 – 2.485 GHz  |
|----------------------|--------------------|
| Peak Gain            | 3.3 dBi            |
| Average Efficiency   | 87%                |
| VSWR Match           | 1.5:1 max          |
| Feed Point Impedance | 50 ohms unbalanced |
| Polarization         | Linear             |
| Power Handling       | 0.5 Watt CW        |

### Mechanical Specifications

| Ordering Part #      | 1003893FT-AA10L0100                                                  |
|----------------------|----------------------------------------------------------------------|
| Dimensions (mm)      | 40.0 x 8.0 x 0.2                                                     |
| Weight (grams)       | 0.7                                                                  |
| Cable/Connector (mm) | Length: 100, Diameter: 1.13, Color: Black; U.FL compatible connector |
| Mounting             | using 3M468 Adhesive                                                 |
| Packaging            | PE bags                                                              |

\*Additional variations with different cable lengths, colors and connectors are available.

### KEY BENEFITS

#### Stay-in-Tune

KYOCERA AVX antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

#### Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

#### Environmental Compliance

Products are the latest RoHS version compliant

### APPLICATIONS



- Embedded design
- Gateway, Access Point
- Handheld
- Smart Home
- Healthcare
- M2M, Industrial devices
- Smart Grid
- OBD-II

## 2.4 GHz KYOCERA AVX Embedded Antenna Specifications

KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.



### Test Setup and Antenna Assembly

Measured in free space with PC/ABS loading and 100 mm cable

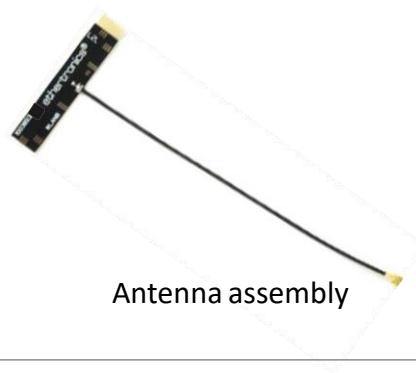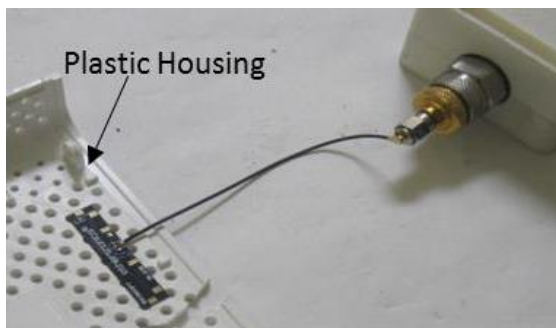

### Typical VSWR and Efficiency Plots


Measured in free space with PC/ABS loading and 100 mm cable

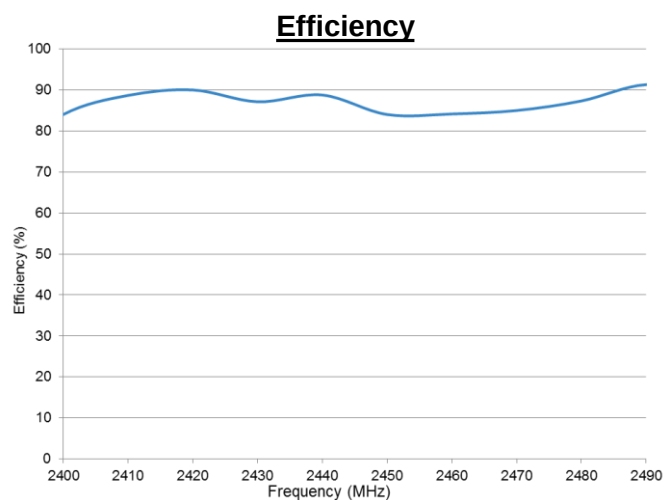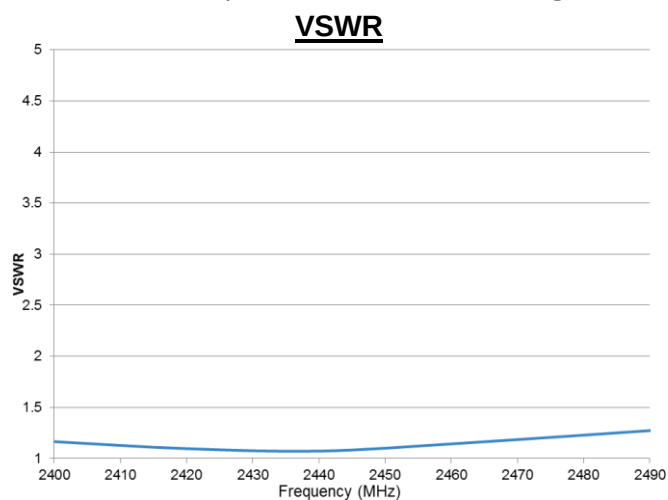

### Antenna Radiation Patterns

Measured with PC/ABS loading and 100 mm cable

Typical Performance @ 2440 MHz

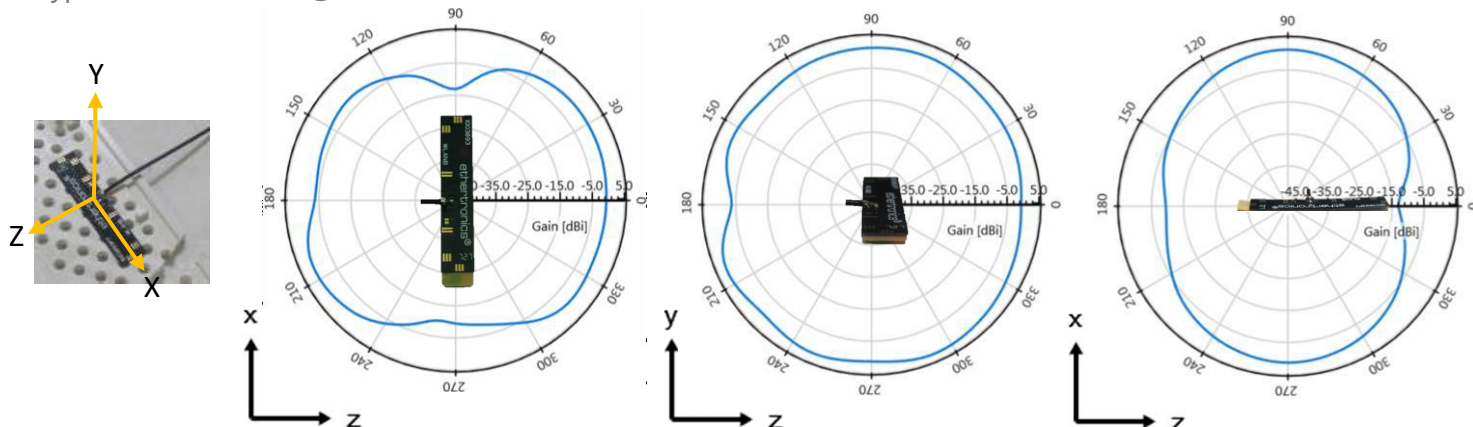


## 2.4 GHz KYOCERA AVX Embedded Antenna Specifications

KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Antenna Tuning Options

Typical Performance using 100 mm cable tested on PC-ABS

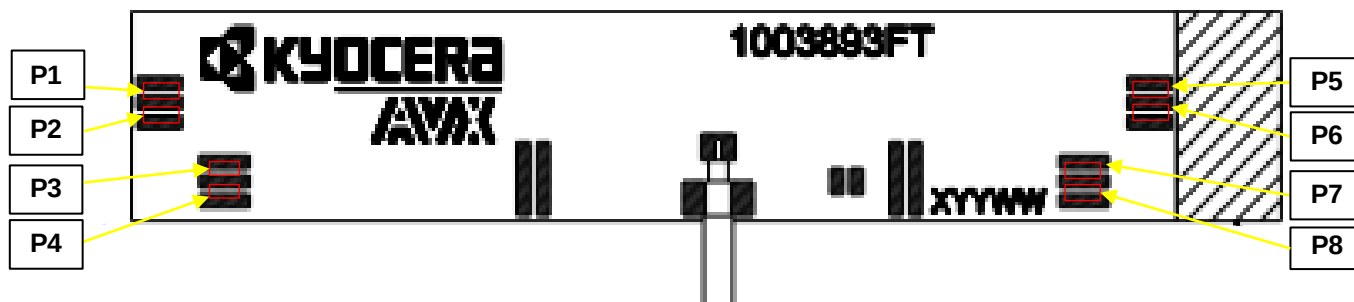

Ref Default: P1 ~ P8 Open

\*This antenna has unique features enabling limited range RF tuning by leaving P1 ~ P8 connected by “solder bridge”. Refer to detailed tuning options below.

### Options for Tuning: "2.4GHz (Lower)"

| MODE                       | T1                   | T2                      | T3                   | T4                      |
|----------------------------|----------------------|-------------------------|----------------------|-------------------------|
| PADS                       | Connect:<br>P1+P5    | Connect:<br>P1+P2+P5+P6 | Connect:<br>P3+P7    | Connect:<br>P3+P4+P7+P8 |
| Outcome:<br>(Ref: Default) | ~20 MHz<br>Shift low | ~40 MHz<br>Shift low    | ~20 MHz<br>Shift low | ~50 MHz<br>Shift low    |

### Antenna Tuning Procedure

This antenna has unique features enabling limited range RF tuning by adding a solder bridge in the designated area. Ease of tuning for any application on the fly with a soldering iron. Tuning optional if required.



### Antenna Tuning (Low)



\*Add bridge of solder to connect pads for tuning



### Filled Gap

## 2.4 GHz KYOCERA AVX Embedded Antenna Specifications

KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Mechanical Dimensions


For references only, in mm.

| Part Number         | A (mm)     | B (mm)    | C (mm) | D (mm)      | Connector       |
|---------------------|------------|-----------|--------|-------------|-----------------|
| 1003893FT-AA10L0100 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 100.0 ± 3.0 | U.FL compatible |


\*Height "C" of 0.2 mm includes FPC + adhesive thicknesses

\*Connector shown in photo below is "Face Down"


**Top View**

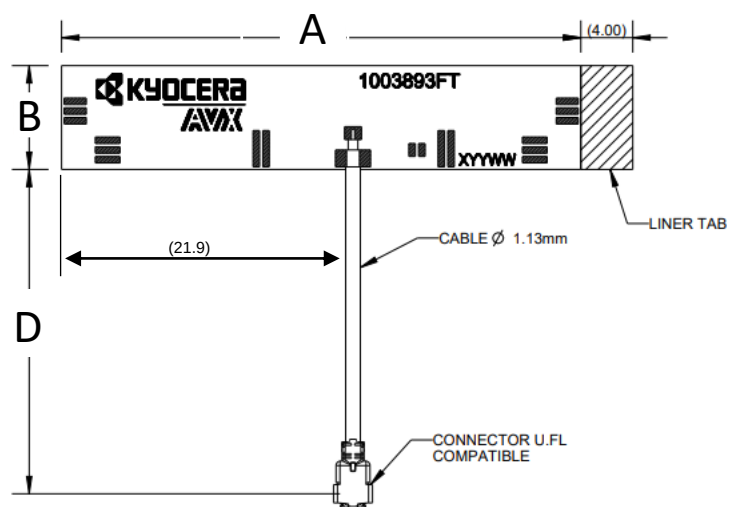

**Side View**

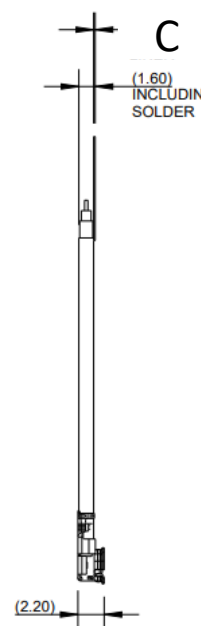

**Bottom View**

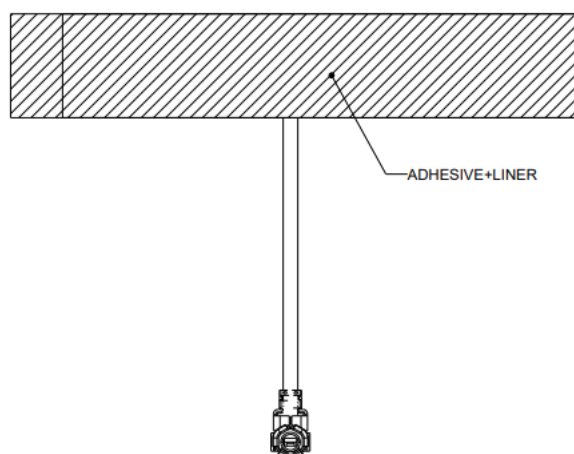

2.4 GHz KYOCERA AVX Embedded Antenna Specifications  
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

### Ordering Part Numbers

Typical antenna dimensions (mm)

| Part Number         | A (mm)     | B (mm)    | C (mm) | D (mm)      | Connector       |
|---------------------|------------|-----------|--------|-------------|-----------------|
| 1003893FT-AA10L0025 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 25.0 ± 3.0  | U.FL compatible |
| 1003893FT-AA10L0050 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 50.0 ± 3.0  | U.FL compatible |
| 1003893FT-AA10L0075 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 75.0 ± 3.0  | U.FL compatible |
| 1003893FT-AA10L0100 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 100.0 ± 3.0 | U.FL compatible |
| 1003893FT-AA10L0150 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 150.0 ± 4.0 | U.FL compatible |
| 1003893FT-AA10L0200 | 40.0 ± 0.3 | 8.0 ± 0.3 | 0.2    | 200.0 ± 4.0 | U.FL compatible |

\*Height "C" of 0.2 mm includes FPC + adhesive thicknesses

\*Connector shown in photo below is "Face Down"