https://product.tdk.com/en/power/ddsm
www.emea.lambda.tdk.com/ddsm

Programmable 120 and 240W DIN Rail Mount Isolated DC-DC converters



Industrial | Test | COMM | Semi-Fab | Factory Automation | Renewable

The DDSM 120W and 240W programmable DC-DC converters have a 12 to 48Vdc input and a wide 5 to 55V output range. They feature a 2,200 Vdc isolation from input to output and output to ground. These digitally controlled modules have control and monitoring software via Modbus over USB for remote control and real-time monitoring. In addition, the digital display shows the device settings, system alarm status, status information with the ability to be manually operated via three push buttons on the front panel.

Features	Benefits
• Wide Input and Output Ranges	• Supports Multiple System Voltages
• MODBUS over USB Communication	• Remote Programming
• 2,200Vdc Insulation from Input & Output to Ground	• Offers an Independent Isolated Voltage for PoE
• User-Friendly Digital Display with Push Buttons	• Suitable for Local Programming & Diagnostics
• Up to 93% Efficient & Low Standby Losses	• Energy Saving

Model Selector

Model	Nominal Input Voltage (V)	Nominal Output Voltage (V)	Output Current (A)	Maximum Power (W)	Input Current at nominal input (A)
DDSM120-0555-R0	12 to 48	5 to 55	1 to 5	120	6
DDSM240-0555-R0	12 to 48	5 to 55	1 to 10	240	12

Downloaded from Arrow.com.

Specification

Model(s)		DDSM120-0555-R0	DDSM240-0555-R0
Input			
Input Voltage Range	Vdc	12 to 48	
No Load Power Consumption	W	5.3	5
Efficiency	%	91.7	93
Conducted & Radiated EMI	-	Class B	
Safety Certifications and Markings	-	IEC/EN/UL/CSA 61010-1, 61010-2-201, IEC/EN/UL/CSA 62368-1, CE Mark and UKCA Mark	

Specification

Model(s)	Standard	Test Level	Criteria	Notes: See Immunity test report on website
Immunity				
ESD	EN61000-4-2	4kV / 8kV	A	Contact / Air
Radiated Susceptibility	EN61000-4-3	80M -1GHz: 10V/m 1.4 - 2.0GHz: 3V/m 2.0 - 2.7GHz: 1V/m	A	
Electrical Fast Transient Burst	EN61000-4-4	1kV	A	
Magnetic Fields	EN61000-4-8	30A/m	A	


Specification

Model(s)		DDSM120-0555-R0	DDSM240-0555-R0
Output			
Switching Frequency	kHz	100	
External Load Capacitance	uF	10000 start-up	
Ripple & Noise	mVpp	≤ 200	
Temperature Coefficient	%/°C	0.02	
Minimum Load	-	No minimum load required	
Overcurrent Protection	%	Yes, hiccup or constant current mode	
Overvoltage Protection	-	62V (max)	
Overtemperature Protection		Yes, auto recovery	
Remote Sense		No remote sense	
Remote On/Off	-	See programming instructions	
Parallel Operation	-	Possible, see Technical Specification	
Series Operation	-	Not possible	
DC OK Relay	-	Normally open, 24V 5A maximum	
Environmental			
Operating Temperature	°C	-25 to +70 (Max), 25 to +55° (Nominal)	
Storage Temperature	°C	-40 to +85	
Humidity (non-condensing)	%RH	95 (Operating & Storage)	
Cooling	-	Convection	
Altitude	m	3,000 nominal	
Withstand Voltage (For 1 minute)	Vdc	Input to case 2,200, input to output 2,200, output to case, 2,200	
Isolation Resistance	MΩ	>100, output to case 500Vdc (25°C, 70%RH)	
Vibration (Mounted on DIN rail)	-	IEC 60068-2-6. 2g / 10 .. 500Hz, 2hour/direction X,Y,Z	
Shock (Mounted on DIN rail)	-	IEC 60068-2-27. 30g / 11ms ±5ms, 2 bumps/direction, 9 bumps total	
Other			
Weight (Typ)	g	500	
Size (WxHxD)	mm	40 x 115 x 116.6	
Size (WxHxD)	Inches	1.57 x 4.53 x 4.59	
Case Material	-	Aluminum	
MTBF - Telcordia SR-332 issue 3*	Hours	1,173,000	
Warranty	yrs	3	


Downloaded from Arrow.com.

Mechanical Specification

Outline Drawing DDSM

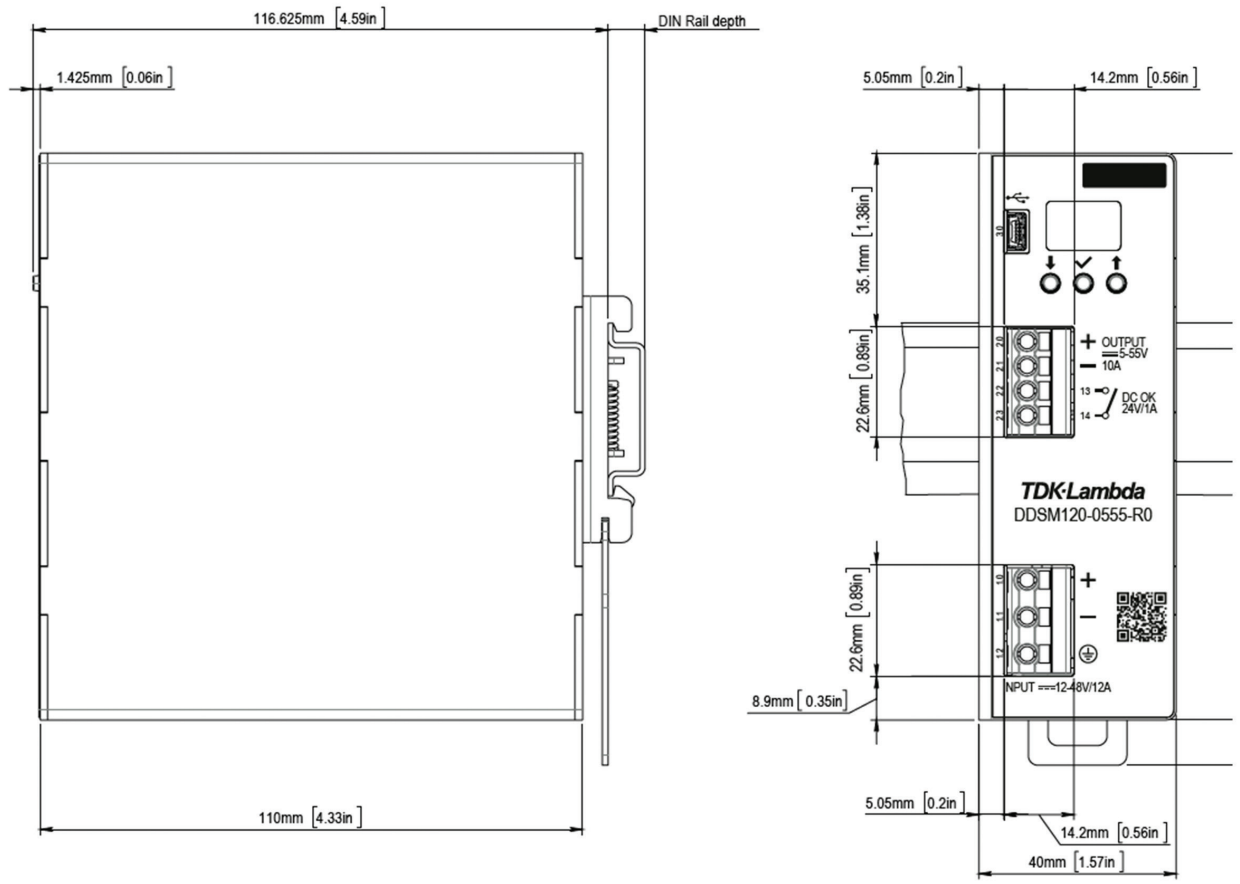

DDSM Block Diagram

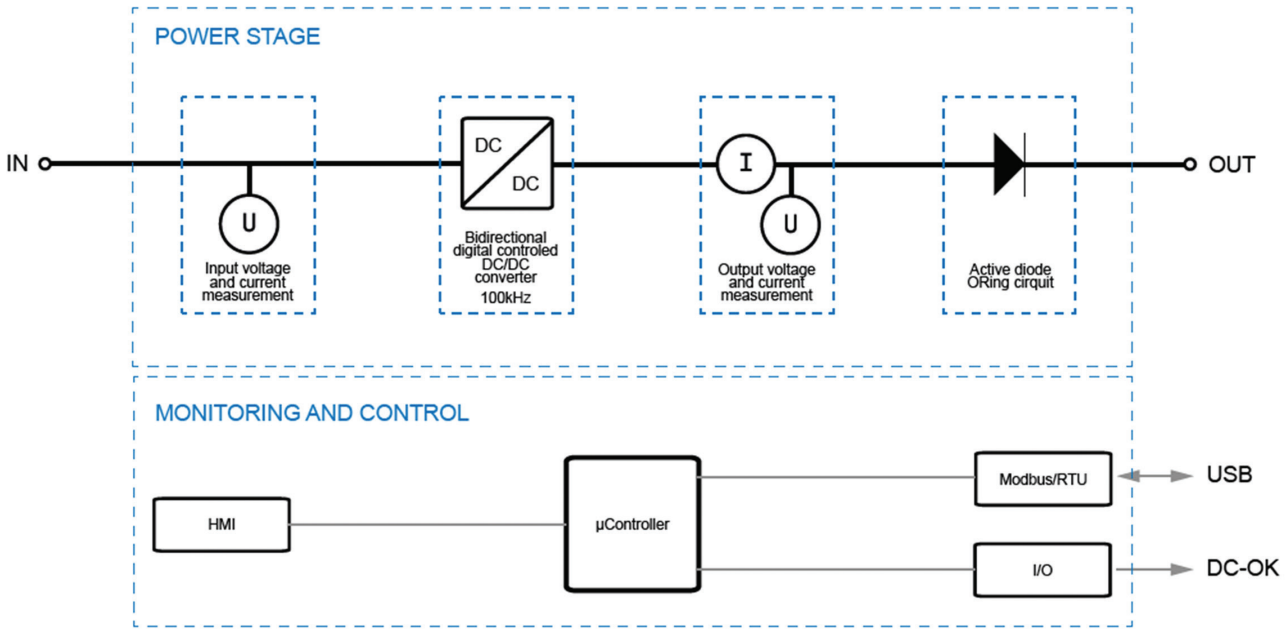

Downloaded from Arrow.com.



TDK-Lambda France SAS
Tel: +33 1 60 12 71 65
tlf.fr-powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



TDK-Lambda Americas
Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



Italy Sales Office
Tel: +39 02 61 29 38 63
tlf.it-powersolutions@tdk.com
www.emea.lambda.tdk.com/it



TDK Electronics do Brasil Ltda
Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



Netherlands
tlf.nl-powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Corporation
Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda Europe GmbH
Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



TDK-Lambda (China) Electronics Co. Ltd.
Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



Austria Sales Office
Tel: +43 2256 655 84
tlg.at-powersolutions@tdk.com
www.emea.lambda.tdk.com/at



TDK-Lambda Singapore Pte Ltd.
Tel: +65 6251 7211
tls.marketing@tdk.com
www.sg.lambda.tdk.com



Switzerland Sales Office
Tel: +41 44 850 53 53
tlg.ch-powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



TDK India Private Limited, Power Supply Division
Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com



TDK-Lambda Europe GmbH
Tel: +45 3222 8086
tlg.dk-powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.
Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Israel Ltd.
Tel: +972 3 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en

For Additional Information, please visit
https://product.tdk.com/en/power/

Downloaded from Arrow.com.