

*Application

- 1.Copiers,printers and Fax Machines.
- 2.VCRs and CD players.
- 3.Various position detection sensor.

*Features

- 1.Compact package.
- 2.High sensing accuracy(Slit width:0.5mm).
- 3.Printed wiring board direct mounting type(with a locating pin).
- 3.Gap between light emitter and detector:5mm.
- 4.Compliant with European RoHS directives.
- 5.Housing UL rating:94V-0.
- 6.RoHS compliant.

*Dimensions


Note: All units are in millimeters unless otherwise indicated.

***Absolute Maximum Ratings (T_a=25°C)**

Parameter		Symbol	Rating	Unit
Input	Forward current[1]	I _F	30	mA
	Reverse voltage	V _R	5	V
	Power dissipation	P _d	35	mW
	Peak Forward Current [2]	I _{FP}	100	mA
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	5	V
	Collector current	I _C	50	mA
	Collector power dissipation	P _C	75	mW
Operating temperature		T _{opr}	-30~+85	°C
Storage temperature		T _{stg}	-40~+100	°C
Soldering temperature(5s) [3]		T _{sol}	260	°C

Notes:

- 1.Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
- 2.Duty:1/100,Pulse Width:0.1mS.
- 3.At the location of 1.5mm from the package bottom.

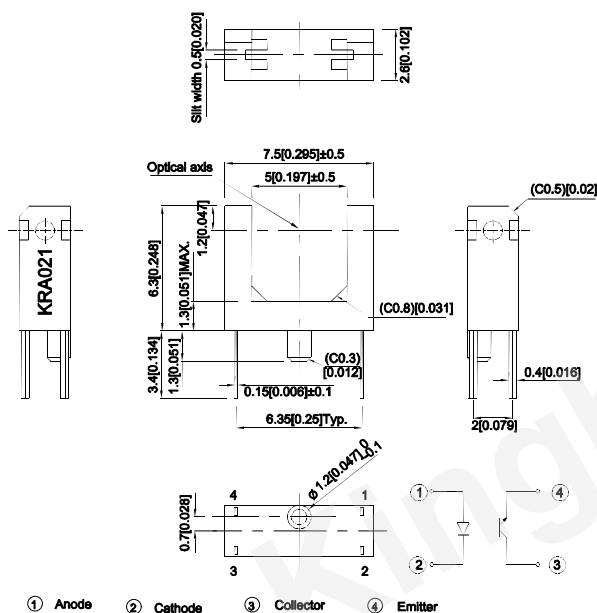

Unless otherwise, the tolerances are $\pm 0.15\text{mm}$.

***Electrical / Optical Characteristics at T_A=25°C**

Parameter		Symbol	Value			Conditions
			Min.	Typ.	Max.	
Input	Forward voltage	V _F	-	1.15V	1.40V	I _F =10mA
	Reverse current	I _R	-	-	10μA	V _R =5V
	Peak Wavelength	λ _p	-	940nm	-	-
Output	Collector current	I _C /I _F	2.5%	-	50%	I _F =10mA, V _{CE} =2V
	Collector dark current	I _D	-	-	100nA	V _{CE} =24V, I _F =0
	Cullector-emitter saturation voltage	V _{CE(sat)}	-	0.1V	0.4V	I _C =0.25mA, I _F =20mA
	Peak spectral sensitivity wavelength	λ _p	-	920nm	-	-
Rise time		t _r	-	15μsec	50μsec	V _{CC} =5V, R _L =1KΩ I _C =1mA
Fall time		t _f	-	15μsec	50μsec	



Fig.1 Forward Current vs. Forward Voltage




Fig.2 Collector Current vs. Forward Current




Fig.3 Collector Current vs. Ambient Temperature

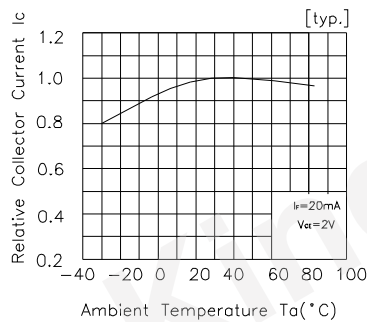


Fig.4 Collector-Emitter Saturation Voltage vs. Ambient Temperature

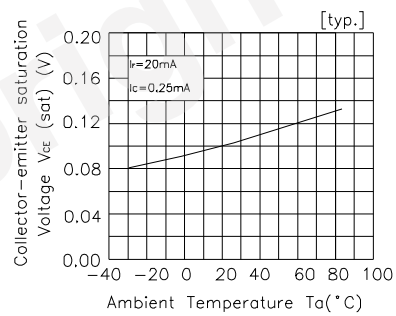


Fig.5 Forward Current vs. Collector Dissipation Temperature Rating

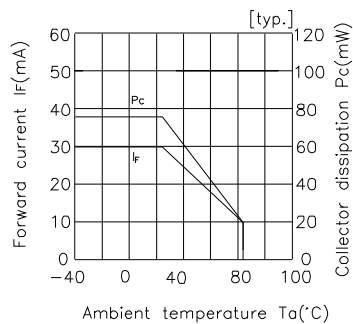


Fig.6 Forward Current vs. Collector-Emitter Voltage

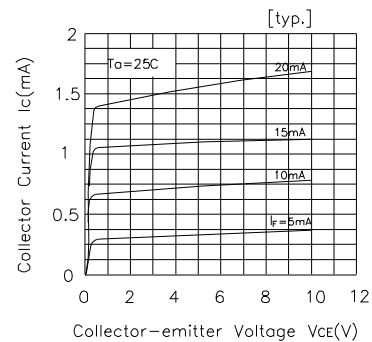


Fig.7 Relative Collector Current vs. Shield Distance(1)




Fig.8 Relative Collector Current vs. Shield Distance(2)






Fig.9 Response Time vs Load Resistance

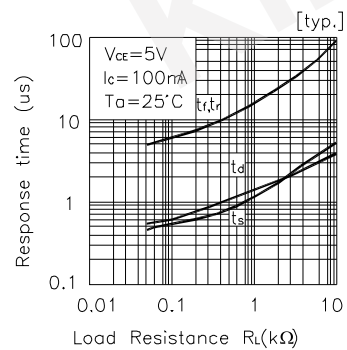


Test Circuit for Response Time

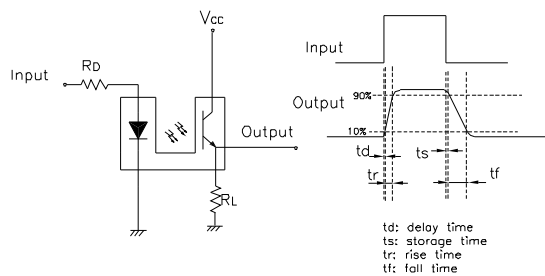

KRA021

Wave Soldering Profile For Lead-free Through-hole LED.

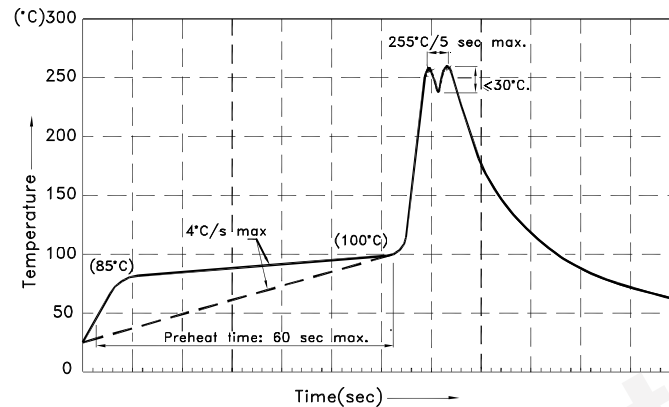


Notes:

1. Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C.
2. Peak wave soldering temperature between 245°C ~ 255°C for 3 sec (5 sec max).
3. Do not apply stress to the epoxy resin while the temperature is above 85°C.
4. Fixtures should not incur stress on the component when mounting and during soldering process.
5. SAC 305 solder alloy is recommended.
6. No more than one wave soldering pass.

PACKING & LABEL SPECIFICATIONS

KRA021

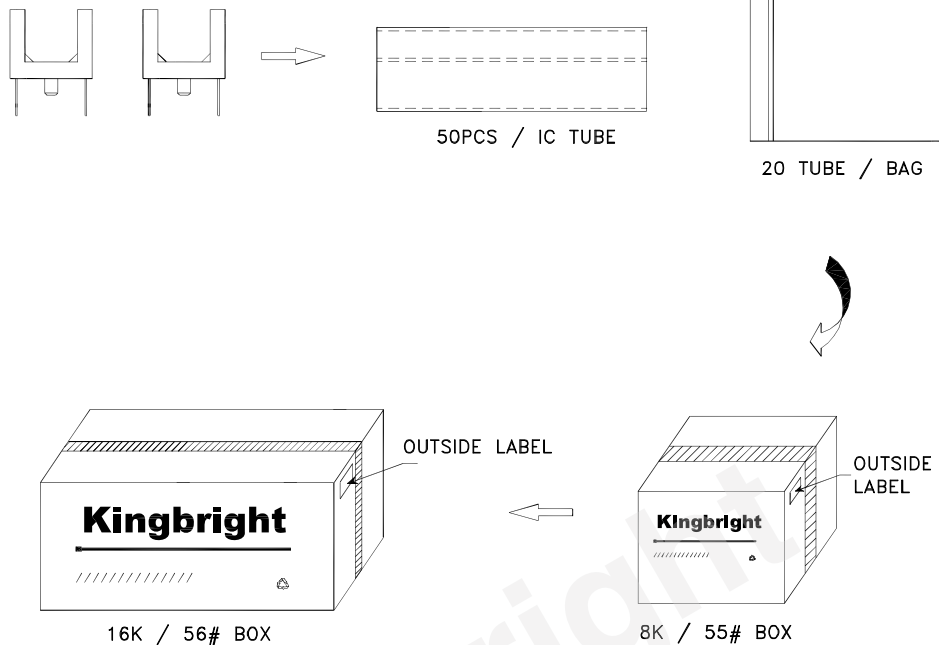

Kingbright		XXXXXXXXXX-XXXX	
P/NO: XXXXXXXX			
QTY: XXXXpcs			
S/N: XXXX			
CODE: XXX			
COUNTRY: CN		QC DATE: XXX XX XXXX PASSED	
LOT NO:			
XXXXXXXXXX-XXXX			
		1	RoHS Compliant

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
6. All design applications should refer to Kingbright application notes available at http://www.kingbright.com/application_notes