

SNA series (1A,3A)

SNA -03 -223 - ☐

① ② ③ ④


- ① Model Name
② Rated Current
③ Line to ground capacitor code: See table 1.1.

table 1.1 Line to ground capacitor code

Code	Line to ground capacitor (nominal value)
000	Not Provided
223	22000pF

- ④ Options
D: DIN rail installation type

* The dimensions change when the option is set.
Refer to External view.

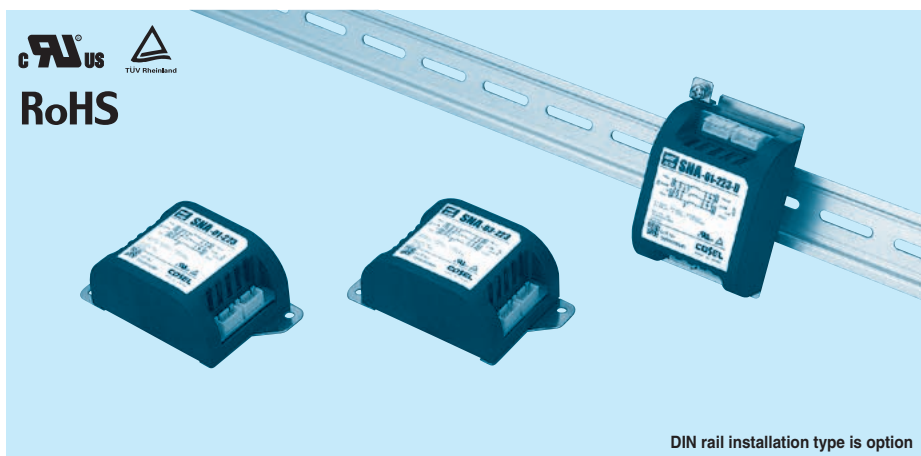

Features of SNA series (1A and 3A)


Ripple noise attenuation type for switch mode power supplies(DC)

- ± 50 VDC
- Best filter for switch mode power supplies of analog circuits
(ex. power supply filter for an operational amplifier)

Specifications

No.	Items	SNA-01-223	SNA-03-223
		Interface: Connector	
1	Rated Voltage DC[V]	± 50 (+Vin - COM-in, -Vin - COM-in)	
2	Rated Current DC[A]	1	3
3	Test Voltage (Terminal-Mounting Plate)	500 VAC (Cutoff Current = 100mA), 1 minute at room temperature and humidity	
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 50M Ω min at room temperature and humidity	
5	DC resistance	190m Ω max	90m Ω max
6	Operating temperature	-40 to +71°C (Refer to Derating Curve)	
7	Operating humidity	20 to 95%RH (Non condensing)	
8	Storage temperature/humidity	-40 to +75°C/20 to 95%RH (Non condensing)	
9	Vibration	10 to 55Hz, 19.6m/s ² (2G), 3min. Period, 1hour each X, Y and Z axis	
10	Impact	196.1m/s ² (20G), 11ms Once each X, Y and Z axis	
11	Safety agency approvals	UL60950-1, C-UL (CSA60950-1), EN62368-1	
12	Case size (without projection) /Weight	52 X 35 X 93 mm [2.05 X 1.38 X 3.66 inches] (W X H X D) /130g max (Option : -D refer to external view)	


Circuit Diagram

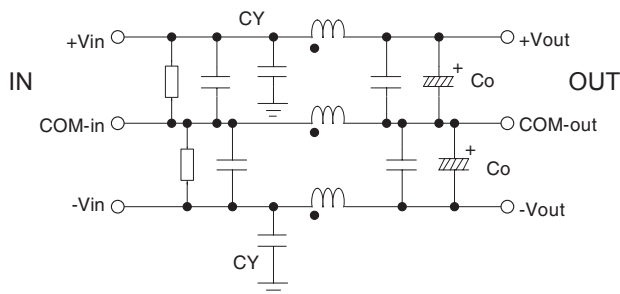

CY : Line to ground capacitor Co : Electrolytic capacitor $\text{---} \text{---} \text{---}$: Mounting Plate


■ Expected life : 10 years

Derating Curve

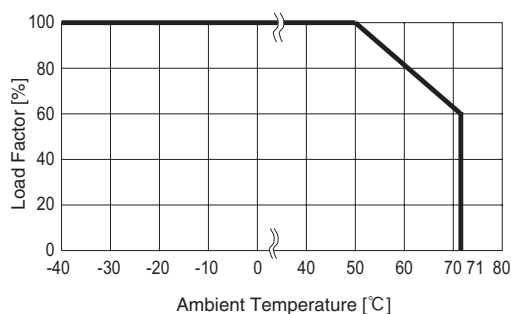

External view

Standard Type

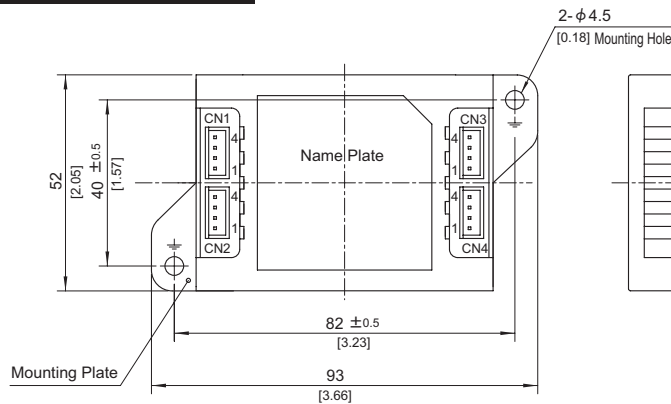

Pin No.	Function
1,2	COM-in
3,4	+Vin

Pin No.	Function
1,2	-Vin
3,4	COM-in


Pin No.	Function
1,2	COM-out
3,4	+Vout

Pin No.	Function
1,2	-Vout
3,4	COM-out

I/O Connector	Mating connector	Terminal
CN1-CN4	B4B-XH-AM	XHP-4
		Reel: SXH-001T-P0.6
		Bulk: BXH-001T-P0.6

(Mfr: J.S.T)

Option harness : Refer to Instruction Manual 4

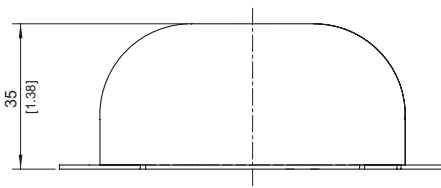※ Tolerance : ± 1 [± 0.04]

※ Weight : 130g max

※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]


※ Mounting plate : Iron (surface finishing : nickel plating) $t=1.0$ [0.04]

※ Case : PBT

※ Dimensions in mm, []=inches

※ Keeping drawing current per pin below 2A for CN1 to CN4

DIN rail installation Type

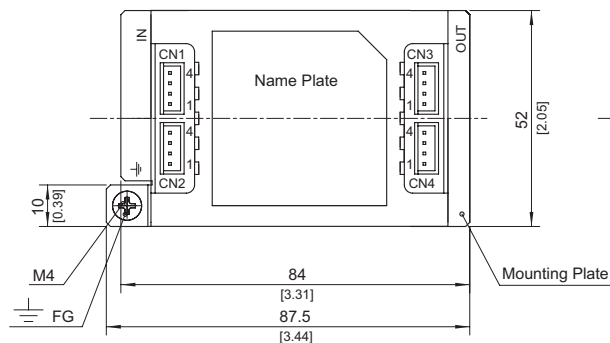

Pin No.	Function
1,2	COM-in
3,4	+Vin

Pin No.	Function
1,2	-Vin
3,4	COM-in


Pin No.	Function
1,2	COM-out
3,4	+Vout

Pin No.	Function
1,2	-Vout
3,4	COM-out

I/O Connector	Mating connector	Terminal
CN1-CN4	B4B-XH-AM	XHP-4
		Reel: SXH-001T-P0.6
		Bulk: BXH-001T-P0.6

(Mfr: J.S.T)

Option harness : Refer to Instruction Manual 4

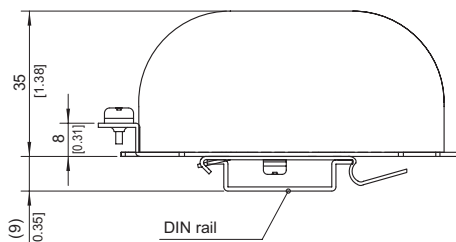※ Tolerance : ± 1 [± 0.04]

※ Weight : 140g max

※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]

※ Mounting plate : Iron (surface finishing : nickel plating) $t=1.0$ [0.04]

※ Case : PBT

※ Dimensions in mm, []=inches

※ Keeping drawing current per pin below 2A for CN1 to CN4

■Note when installing the EM/EMC Filter on a DIN rail.

When the EM/EMC Filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.

Be sure to connect the FG terminal of the EM/EMC Filter body to the earth.

