

Helping Customers Innovate, Improve & Grow



VPC1

Description

Vectron's VPC1 Crystal Oscillator (XO) is a quartz stabilized square wave generator with a CMOS output. The VPC1 utilized a high performance, low frequency quartz resonator followed by a custom ASIC to synthesize the output frequency.

Features


- Quick Delivery
- Wide output Frequency range up to 160 MHz
- Stabilities of $\pm 50, \pm 100$ PPM
- 5.0, 3.3 V Operation
- HCMOS/TTL Compatible
- Product is free of lead and compliant to EC RoHS Directive



Applications

- Proto-type delivery

Block Diagram

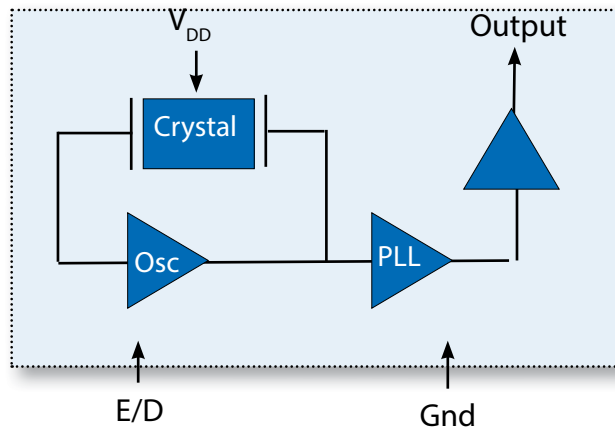

Performance Specifications

Table 1. Electrical Performance, 5V Option

Parameter	Symbol	Min	Typical	Maximum	Units
Supply					
Voltage ¹	V _{CC}	4.5	5.0	5.5	V
Current ²	I _{CC}			45	mA
Frequency					
Nominal Frequency	f _N	1.544		160.000	MHz
Stability ⁴ , (Ordering Option)		±25, ±50, ±100			ppm
Outputs					
Output Logic Levels ² Output Logic High Output Logic Low	V _{OH} V _{OL}	0.9*V _{DD}		0.1*V _{DD}	V V
Load	I _{OUT}			15	pF
Output Rise /Fall Time ^{2,4} <20.000MHz 20.001 to 160.000MHz	t _R /t _F			8 4	ns
Duty Cycle ^{2,5}		45	50	55	%
Enable/Disable					
Output Enable/Disable Output Enable Output Disable	V _E V _D	4.0		0.8	V V
Start-Up Time	t _{SU}			10	ms
Operating Temp, (Ordering Option)	T _{OP}	-10/70 or -40/85			°C

- 1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01 μF
- 2] Parameters are tested with production test circuit below , Figure 1.
- 3] See Standard Frequencies and Ordering Information tables for more specific information
- 4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for 50 and 100ppm options.
- 5] Duty Cycle is measured as On Time/Period (Fig 2).
- 6] The Output is Enabled if the Enable/Disable is left open.

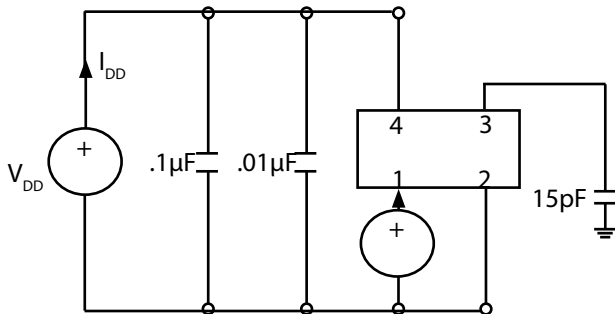


Fig 1: Test Circuit

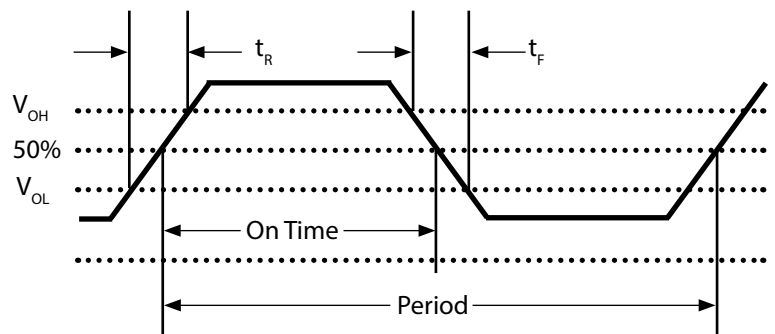


Fig 2: Waveform

Performance Specifications

Table 2. Electrical Performance, 3.3V Option

Parameter	Symbol	Min	Typical	Maximum	Units
Supply					
Voltage ¹	V _{CC}	2.97	3.3	3.63	V
Current ²	I _{CC}			28	mA
Frequency					
Nominal Frequency	f _N	1.544		125.000	MHz
Stability ² , (Ordering Option)		±25, ±50, ±100			ppm
Outputs					
Output Logic Levels ² Output Logic High Output Logic Low	V _{OH} V _{OL}	0.9*V _{DD}		0.1*V _{DD}	V V
Load	I _{OUT}			15	pF
Output Rise /Fall Time ² <20.000MHz 20.000 to 125.000MHz	t _R /t _F			10 6	ns
Duty Cycle		45	50	55	%
Enable/Disable					
Output Enable/Disable ⁷ Output Enable Output Disable	V _E V _D	2.0		0.5	V V
Start-Up Time	t _{SU}			10	ms
Operating Temp, (Ordering Option)	T _{OP}	-10/70 or -40/85			°C

- 1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF
- 2] Parameters are tested with production test circuit below , Figure 1.
- 3] See Standard Frequencies and Ordering Information tables for more specific information
- 4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for 50 and 100ppm options.
- 5] Duty Cycle is measured as On Time/Period (Fig 2).
- 6] The Output is Enabled if the Enable/Disable is left open.

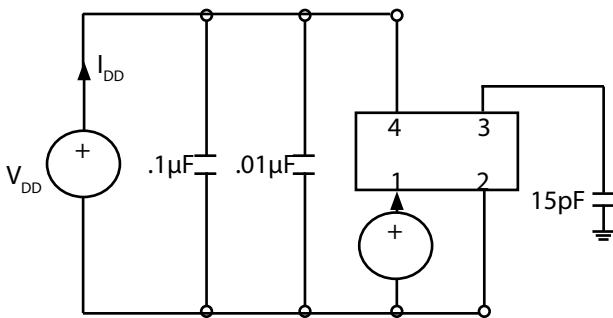


Fig 1: Test Circuit


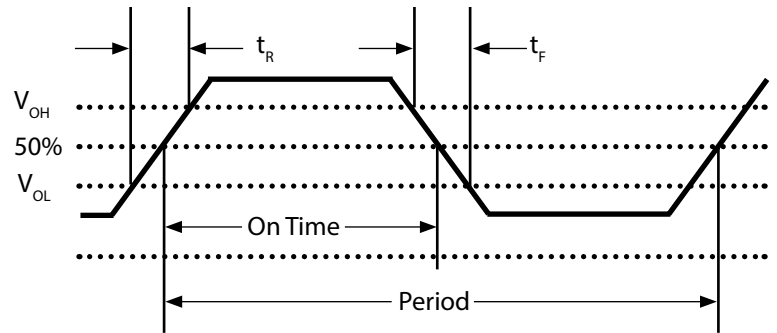


Fig 2: Waveform

Outline Drawing & Pad Layout

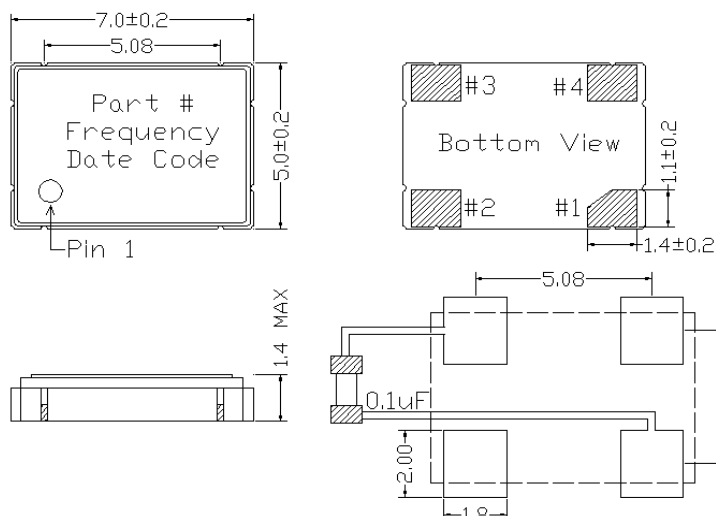

Recommended soldering pattern

Table 3. Pin Out

Pin	Symbol	Function
1	E/D	Enable Disable
2	GND	Case and Electrical Ground
3	Output	Output
4	V _{DD}	Power Supply Voltage

Reliability

VI qualification includes aging at various extreme temperatures, shock and vibration, temperature cycling, and IR reflow simulation. The VPC1 family is capable of meeting the following qualification tests:

Table 4. Environmental Compliance

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002
Mechanical Vibration	MIL-STD-883, Method 2007
Solderability	MIL-STD-883, Method 2003
Gross and Fine Leak	MIL-STD-883, Method 1014
Resistance to Solvents	MIL-STD-883, Method 2015
Moisture Sensitivity Level	MSL 1
Contact Pads	Gold over Nickel

Although ESD protection circuitry has been designed into the VPC1 proper precautions should be taken when handling and mounting. VI employs a human body model (HBM) and a charged device model (CDM) for ESD susceptibility testing and design protection evaluation.

Table 5. ESD Ratings

Model	Minimum	Conditions
Human Body Model	1500V	MIL-STD-883, Method 3015
Charged Device Model	1000V	JESD22-C101

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied at these or any other conditions in excess of conditions represented in the operational sections of this data sheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability. Permanent damage is also possible if E/D is applied before Vcc.

Table 6. Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Storage Temperature	T _S	-55 to 125	°C
Soldering Temp/Time	T _{LS}	260 / 10	°C / sec

IR Reflow

The VPC1 is qualified to meet the JEDEC standard for Pb-Free assembly. The temperatures and time intervals listed are based on the Pb-Free small body requirements. The VPC1 device is hermetically sealed so an aqueous wash is not an issue.

Solderprofile:

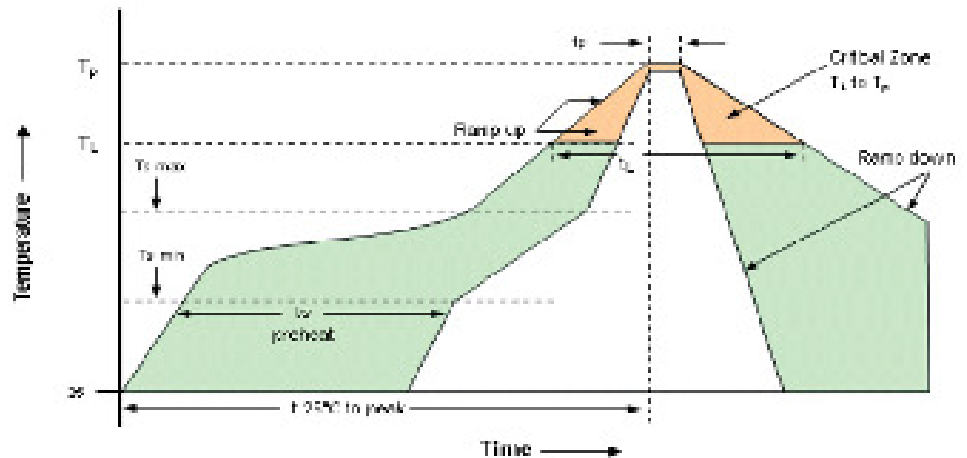


Table 7. Reflow Profile

Parameter	Symbol	Value
PreHeat Time T_{s-min} T_{s-max}	t_s	60 sec Min, 260 sec Max 150°C 200°C
Ramp Up	R_{UP}	3 °C/sec Max
Time Above 217 °C	t_L	60 sec Min, 150 sec Max
Time To Peak Temperature	T_{AMB-P}	480 sec Max
Time at 260 °C	t_p	10 sec Max
Ramp Down	R_{DN}	6 °C/sec Max

Tape and Reel

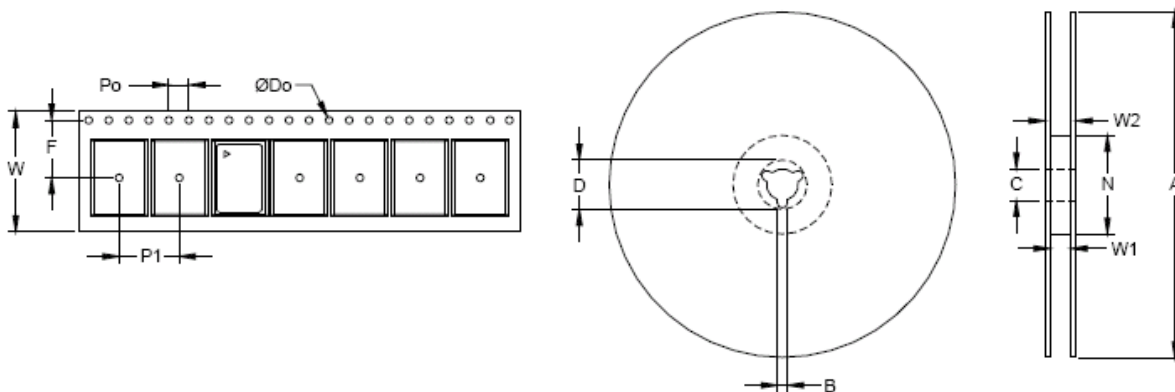


Table 8. Tape and Reel Information

Tape Dimensions (mm)						Reel Dimensions (mm)							
Dimension	W	F	Do	Po	P1	A	B	C	D	N	W1	W2	# Per Reel
Tolerance	Typ	Typ	Typ	Typ	Typ	Typ	Min	Typ	Min	Min	Typ	Max	
VPC1	16	7.5	1.5	4	8	180	2	13	21	60	17	21	1000

Ordering Information

VPC1- X X X- xxMxxxxxxxx

					Frequency in MHz
Product					
Crystal Oscillator					
Package					
7x5 Ceramic					
Power Supply					
A: +5.0Vdc, 15pF					
B: +3.3Vdc, 15pF					
E: +5.0Vdc, 50pf (<66MHz)					
F: +3.3Vdc, 50pF (<66MHz)					
Output					
1: 60/40% Symmetry					
3: 45/55% Symmetry					
Stability - Temp Range					
A: ±100ppm, 0/70°C					
B: ±50ppm, 0/70°C					
C: ±50ppm, -40/85°C					
D: ±50ppm, -40/85°C					
E: ±25ppm, 0/70°C					
F: ±25ppm, -40/85°C					

**Note: not all combination of options are available.
Other specifications may be available upon request.*

Example: VPC1-B3B-125M000000

*** Add _SNPBDIP for tin lead solder dip**

Example: VPC1-B3B-125M000000__SNPBDIP



Microsemi Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans, as well as custom design capabilities and services. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.