



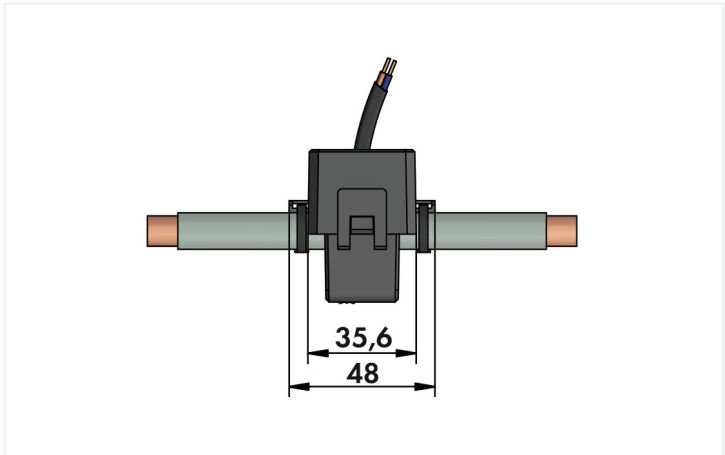

Similar to illustration

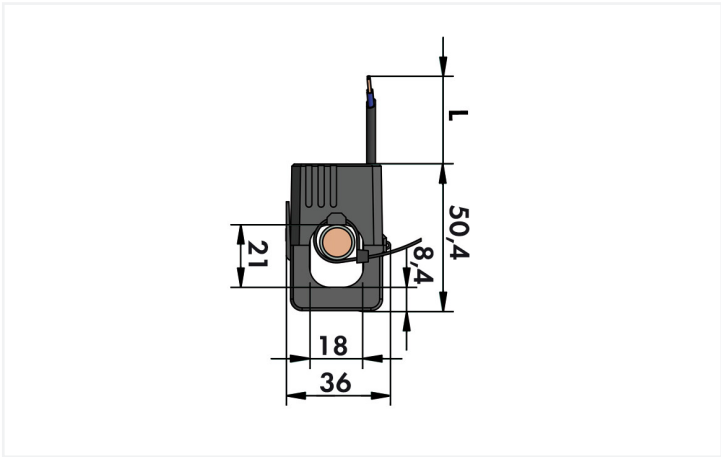

Short description:

WAGO's compact split-core current transformers are ideal for retrofitting existing systems. They are perfect for applications in which the current path must not be disrupted. The transformer's accuracy permits extremely precise current measurements. The split-core current transformers are capable of supplying the specified rated power at the end of the secondary cable. All transformers are supplied with color-coded cables. Two UV-resistant cable ties are also included for secure and easy mounting.

Features:

- Current ratios from 200 A (primary side) and 1 A (secondary side)
- No primary cable interruption
- Ideal for use in very confined spaces
- Rapid mounting
- For use around insulated conductors (18 mm Ø)
- Compact and hinged
- Color-coded connection cable (3 m)

Technical data		
Input		Input – current transformer
Measured variable	Current	Rated continuous thermal current I_{cth} 100 %
		Rated short-time thermal current I_{th} $60 \times I_N / 1 \text{ s}$
		Rated surge current I_{dyn} $2.5 \times I_{th}$
		Rated frequency50 ... 60 Hz
		Primary rated current200 A



Output – current transformer	
Secondary rated current	1 A
Rated power S _r	0.2 VA
Measurement error	
Accuracy class	1
Safety and protection	
Protection type	IP20
Test voltage	AC 6 kV; 50 Hz; 1 min
Highest voltage for equipment U _m	AC 720 V _{rms}
Connection data	
Feedthrough for Measurement Conductor	Ø 18 mm
Cable type	2 x 0.5 mm ² ; fine-stranded
Color code	brown = S1; blue = S2
Physical data	
Cable length	3 m
Width	48 mm / 1.89 inches
Height	50.4 mm / 1.984 inches
Depth	36 mm / 1.42 inches
Mechanical data	
Mounting type	Split-core current transformer (suspended)
Material data	
Fire load	0 MJ
Weight	10 g
Environmental requirements	
Ambient temperature (operation)	-10 ... +55 °C
Ambient temperature (storage)	-20 ... +70 °C
Relative humidity	5 ... 85 % (without condensation)
Operating altitude (max.)	2000 m
Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 61869-1 EN 61869-2
Commercial data	
eCl@ss 10.0	27-21-09-02
eCl@ss 9.0	27-21-09-02
ETIM 9.0	EC002048
ETIM 8.0	EC002048
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	NL
Customs tariff number	85043180888



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03082

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
855-3001/200-001

↓

Documentation			
Additional Information		Bid Text	
WAGO Interface Configuration Software SMALL	1.6.3.7 17.09.2019	exe 46878.36 KB	↓
		855-3001/200-001 19.02.2019	xml 5.15 KB ↓
		855-3001/200-001 05.02.2015	doc 30.50 KB ↓

Instruction Leaflet			
Kabelumbau-Stromwandler	V 1.1.0 15.01.2020	pdf 812.97 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
855-3001/200-001

↓



Engineering-Software

Configuration and Commissioning Software			
WAGO Interface Configuration Software G2 FULL	1.00.10.01 20.01.2022	exe 112213.07 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Current transformer terminal block



Item No.: 2007-8876
Compact terminal block; for 3-phase current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8873
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8874
Compact terminal block; for current and voltage transformers; 6,00 mm²; multicoloured



Item No.: 2007-8875
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured



Item No.: 2007-8877
Compact terminal block; for current transformer circuit; 6,00 mm²; multicoloured

1.1.2 Signal conditioner

1.1.2.1 Current signal conditioner



Item No.: 857-551
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width



Item No.: 857-550
Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width; 2,50 mm²

1.1.2.2 Power measurement module



Item No.: 2857-570/024-001
3-Phase Power Measurement Module; 3x277/480 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC



Installation Notes

Installation



Simple termination!



Quick and easy mounting!

